

MOTOR VEHICLE Specifications

METRIC (U.S. Customary)

Passenger Car

1984

Manufacturer CHEVROLET MOTOR DIVISION GENERAL MOTORS CORPORATION	Car Line CAMARO	
Mailing Address CHEVROLET ENGINEERING CENTER 30003 VAN DYKE WARREN, MI 48090		

Questions concerning these specifications should be directed to the manufacturer whose address is shown above.

The information contained herein is prepared, distributed by, and is solely the responsibility of the automobile manufacturing company to whose products it relates. This specification form was developed by the automobile manufacturing companies under the auspices of the Motor Vehicle Manufacturers Association of the United States, Inc.

The General Specifications herein are those in effect at date of compilation and are subject to change without notice by the manufacturer.

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Table of Contents

1	Car Models
2	Power Teams
3-6	Engine
4	Lubrication System
4	Diesel Information
5	Cooling System
6	Fuel System
7	Vehicle Emission Control
7	Exhaust System
8-10	Transmission, Axles and Shafts
11	Suspension-Front and Rear
12-13	Brakes
13	Tires and Wheels
14-15	Steering
15-16	Electrical
17	Body — Miscellaneous Information
17	Glass
17	Frame
18	Passive Restraint System
19	Convenience Equipment
20-22	Car and Body Dimensions
23	Vehicle Fiducial Marks
24	Lamps and Headlamps
25	Vehicle Mass (Weight)
26	Optional Equipment Mass (Weight)
27-31	Car and Body Dimension Key Sheets
32	Index
	Supplemental Page
	Feature Highlights Page

NOTE:

1. This form uses both SI metric units and U.S. Customary units. The metric unit of measure is presented first, and the U.S. Customary unit follows in parentheses.
2. UNLESS OTHERWISE INDICATED:
 - a. Specifications apply to standard models without optional equipment. Significant deviations are noted.
 - b. Nominal design dimensions are used throughout these specifications.
 - c. All linear dimensions are in millimeters (inches), and all mass (weight) specifications are in kilograms (pounds).
3. The General Specifications herein are those in effect at date of completion and are subject to change without notice by the manufacturer.
4. Additional Car and Body Dimensions and/or drawings (based in part on SAE J1100a "Motor Vehicle Dimensions") may be available from the manufacturer.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*)

Car Models

Model Description FWD/RWD	Introduction Date	Make, Car Line, Series, Body Type (Mfr's Model Code)	No. of Designated Seating Positions (Front/Rear)		Max. Trunk/Cargo Load—Kilograms (Pounds)
REAR WHEEL DRIVE CAMARO		MODEL NUMBER	FRONT/REAR		
Sport Coupe 2-Door Sport Coupe		1FP87	2	2	45.4 (100.1)
Berlinetta 2-Door Sport Coupe		1FS87	2	2	45.4 (100.1)
Model Option					
Z28 2-Door Sport Coupe		1FP87 w/Z28	2	2	45.4 (100.1)
All models share common hatchback body.					
Note: Any specifications on the following pages that are specific to California requirements are indicated accordingly.					

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Power Teams (Indicate whether standard or optional)

SAE J1349 Net bhp (brake horsepower) and net torque connected to 77° F/25° C and 29.61 in. Hg/100 Kpa atmospheric pressure.

SERIES AVAILABILITY	ENGINE					E x h a u s t S/D	TRANSMISSION TRANSAXLE	AXLE RATIO: (std./first)	
	Displ. Liters (in ³)	Carb. (Barrels, Ft. etc.)	Compr. Ratio	SAE Net at RPM				Base / Optional	
				kW (bhp)	Torque N - m (lb. ft.)				
1FP00-A11 States-Base (Except Z28)	L4 2.5L (151 CID) LQ9	EFI	9.0:1	69 (92) @ 4000	182 (134) @ 2800	S	Man. 4-Spd. (3.50 Low)Base	3.42:1	--
				Man. 5-Spd. (3.76 Low)Avail	3.73:1		--		
				Auto '700-R4' Avail	3.73:1		--		
1FP00-A11 States-Avail 1FS00-A11 States-Base (Except Z28)	V6 2.8L (173 CID) LC1	2-Bb1	8.5:1	80 (107) @ 4800	197 (145) @ 2100	S	Man. 5-Spd. (3.50 Low)Avail	3.42:1	--
				Auto '700-R4' Avail	3.23:1		--		
1FP & 1FS00 All States - Avail (Except Z28)	V8 5.0L (305 CID) LG4	4-Bb1	8.6:1	112 (150) @ 4000	325 (240) @ 2400	S	Man. 5-Spd. (2.95 Low)Base	3.23:1	3.73:1
				Auto '700-R4' Avail	3.08:1		--		
1FP00 with Z28 All States Base	V8 5.0L (305 CID) LG4	4-Bb1	8.6:1	112 (150) @ 4000	325 (240) @ 2400	D	Man. 5-Spd. (2.95 Low)Base	3.23:1	3.73:1
				Auto '700-R4' Avail	3.23:1		--		
1FP00 with Z28 only All States Avail.	V8 5.0L (305 CID) L69 HO	4-Bb1	9.5:1	142 (190) @ 4800	325 (240) @ 3200	D	Man. 5-Spd. (2.95 Low)Base	3.73:1	--
				Auto '700-R4' Avail	3.42:1		--		

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO LQ9

2.8 LITER-V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LCI

ENGINE — GENERAL

Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sonic, donc, ohv, hemi, wedge, pre-camber, etc.)	In Line Front Longitudinal	60°V
No. of cylinders	4	6
Bore	101.6 (4.0)	89.0 (3.50)
Stroke	76.2 (3.0)	76.0 (2.99)
Bore spacing (c/l to c/l)	111.8 (4.40)	
Cylinder block material	Cast Iron	
Cylinder block deck height	232.2 (9.164)	224 (8.82)
Deck clearance (minimum) (above or below block)	0.63 (.025) Below	0.62 (.024) Below
Cylinder head material	Cast Iron	
Cylinder head volume (cm ³)	--	--
Head gasket thickness (compressed)	.97 (.03819)	.838 (.033)
Minimum combustion chamber total volume (cm ³)	81.79 (4.99)	63.41734 (3.86927)@
Cyl no system (front to rear)*	L. Bank 1-2-3-4 R. Bank --	1-3-5 2-4-6
Firing order	1-3-4-2	1-2-3-4-5-6
Recommended fuel (leaded, unleaded, diesel)	Unleaded	
Fuel antiknock index (R + M) 2	87	
Total dressed engine mass (wt) dry**	145.3 (320.3)	194.6 (429.0)

Engine — Pistons

Material & mass, g (weight, oz.) piston	Cast aluminum alloy 650 (22.96)	Aluminum alloy 467 (16.47)
---	------------------------------------	-------------------------------

Engine — Camshaft

Location	Right side of block	In block above crankshaft
Material (kg, weight, lbs.)	Cast iron 3.546 (7.82)	Cast iron 3.098 (6.83)
Drive type	Chain/belt Width/pitch --	Chain 19.4 (0.764/9.53)

* Rear of engine — drive takeoff. View from drive takeoff end to determine left & right side of engine.

** Dressed engine mass (weight) includes the following:

@-Piston at TDC, spark plug and valves in place, and cylinder head torqued to specifications.

All those items necessary to make engine a complete ready-to-run unit.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID) 4-BBL. CARBURETOR RPO LG4	5.0 LITER-V8 (305 CID) 4-BBL. CARBURETOR RPO L69 HO
--	---

ENGINE — GENERAL

Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sonic, donc, ohv, hemi, wedge, pre-camber, etc.)	90°V Front Longitudinal
No. of cylinders	8
Bore	94.92 (3.736)
Stroke	88.39 (3.48)
Bore spacing (c/l to c/l)	111.8 (4.40)
Cylinder block material	Cast Iron
Cylinder block deck height	229.2 (9.025)
Deck clearance (minimum) (above or below block)	.635 (.025) below
Cylinder head material	Cast Iron
Cylinder head volume (cm ³)	Not Applicable
Head gasket thickness (compressed)	.533 (.021)
Minimum combustion chamber total volume (cm ³)	Not Available
Cyl no system (front to rear)*	L. Bank 1-3-5-7
	R. Bank 2-4-6-8
Firing order	1-8-4-3-6-5-7-2
Recommended fuel (leaded, unleaded, diesel)	Unleaded
Fuel antiknock index (R + M) 2	87
Total dressed engine mass (wt) dry**	202.3 (446) Auto. 226.2 (500) Man 202.5 (447)

Engine — Pistons

Material & mass, g (weight, oz.) piston	Aluminum 502 (17.7)
---	------------------------

Engine — Camshaft

Location	In block above crankshaft
Material (kg, weight, lbs)	Cast Iron 3.969 (8.75)
Drive type	Chain/belt Chain
	Width/pitch 15.976 (.625)/.5

* Rear of engine — drive takeoff. View from drive takeoff end to determine left & right side of engine.

** Dressed engine mass (weight) includes the following:

All those items necessary to make engine a complete ready-to-run unit.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (•) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO LQ9

2.8 LITER V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LCI

Engine – Valve System

Lifters (std., opt., n.a.)	Hydraulic	Standard
	Solid	--

Engine – Connecting Rods

Material & mass (kg., weight, lbs.)	Cast Arma Steel 620.9 (21.9)	SAE 1037 or 1038 Steel 602 (21.23)
-------------------------------------	---------------------------------	---------------------------------------

Engine – Crankshaft

Material	Nodular Cast Iron	
Mass (kg., weight, lbs.)	12.381 (27.29)	14.170 (31.24)
End thrust taken by bearing (no.)	5	3

Engine – Lubrication System

Normal oil pressure [kPa (psi) at engine rpm]	259 (37.5) @ 2000	345-448 (50-65) @ 1200
Type oil intake (floating, stationary)	Stationary	
Oil filter system (full flow, part, other)	Full flow	
Capacity of c/case, less filter-refill-L (qt.)	2.84 (3.0)	3.8 (4.0)

Engine – Diesel Information

Glow plug, current drain at 0°F		
Injector nozzle	Type	NOT
	Opening pressure [kPa (psi)]	APPLICABLE
Pre-chamber design		
Fuel injection pump	Manufacturer	
	Type	
Supplementary vacuum source (type)		
Fuel heater (yes/no)		
Water separator, description (std., opt.)		
Turbo manufacturer		
Oil cooler		
Oil filter		

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69

Engine - Valve System

Lifters (std., opt., n.a.)	Hydraulic	Standard
	Solid	--

Engine - Connecting Rods

Material & mass (kg., weight, lbs.)	SAE 1037 or 1038 Steel .604.47 (1.333) @
-------------------------------------	---

Engine - Crankshaft

Material	Nodular Cast Iron
Mass (kg., weight, lbs.)	23.360 (51.50)
End thrust taken by bearing (no.)	5

Engine - Lubrication System

Normal oil pressure (kPa (psi) at engine rpm)	345-448 (50-65) @ 2000
Type oil intake (floating, stationary)	Stationary
Oil filter system (full flow, part, other)	Full flow
Capacity of c/case, less filter-refill-L (qt.)	4.5 (5.0)

Engine - Diesel Information

Glow plug, current drain at 0°F		
Injector nozzle	Type	NOT
	Opening pressure [kPa (psi)]	APPLICABLE
Pre-chamber design		
Fuel injection pump	Manufacturer	
	Type	
Supplementary vacuum source (type)		
Fuel heater (yes/no)		
Water separator, description (std., opt.)		
Turbo manufacturer		
Oil cooler		
Oil filter		

@ - Includes rod, cap, bolts and nuts

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO LQ9

2.8 LITER V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LC1

Engine - Cooling System

Coolant recovery system (std., opt., n.a.)		Standard				
Coolant fill location (rad., bottle)		Bottle, coolant recovery				
Radiator cap relief valve pressure (kPa (psi))		103.4 (15)				
Circulation thermostat	Type (choke, bypass)	Bypass			Choke	
	Starts to open at °C (°F)	91°C (195°F)			90.6°C (195°F)	
Water pump	Type (centrifugal, other)	Centrifugal				
	GPM 1000 pump rpm	6			22.7 @ 3000 Pump RPM	
	Number of pumps	One				
	Drive (V-belt, other)	V-belt				
	Bearing (type)	Sealed ball-roller				
By-pass recirculation [type (inter., ext.)]		External			Internal	
Radiator core [type (cross-flow vertical cellular tube and fin, other) and material]		Cross flow, aluminum, high efficiency radiator				
Cooling system capacity	With heater—L(qt.)	8.65(9.14)Auto, 8.79(9.29)Man			12.09(12.78)Auto, 12.23(12.93)Man	
	With air cond.—L(qt.)	8.67(9.16)Auto, 8.81(9.31)Man			12.01(12.69)Auto, 12.15(12.84)Man	
	Opt. equipment [specify—L(qt.)]	8.75(9.25)Auto, 8.89(9.4)Man			12.09(12.78)Auto, 12.23(12.93)Man	
Water jackets full length of cyl. (yes, no)		Yes H.D. Radiator			Yes H.D. Radiator	
Water all around cylinder (yes, no)		Yes			Yes	
Radiator core	Std., A/C, HD	Std.	A/C	H.D.	Std., A/C or H.D.	A/C and H.D.
	Width	527.8	667.5	667.5	527.8	527.8
	Height	437.8	437.8	437.8	437.8	437.8
	Thickness	23.5	23.5	23.5	23.5	23.5
	Fins per inch @	4.0	4.0	*	4.0	3.0
	Std., elec., opt.	Std.		Opt.	Std.	
Fan	Number of blades & type (flex, solid, material)	4, Columbium, solid		7, Aluminum, solid	3, Aluminum, solid	
	Diameter & projected width	381.0		406.4	457.2	
	Ratio (fan to crankshaft rev.)	1.16:1		Not Available	1.08:1	
	Fan cutout type	None		Clutch	Clutch	
	Drive [type (direct, remote)]	Belt		Belt	Belt	
	RPM at idle (elec.)	-		-	-	
	Motor rating (wattage) (elec.)	-		-	-	
	Motor switch (type & location) (elec.)	-		-	-	
	Switch point (temp., pressure) (elec.)	-		-	-	
	Fan shroud (material)	Plastic		Plastic	Plastic	

@ - Distance between top of fins

* - 3.0 with manual trans.
 3.5 with auto. trans.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO 169 HO

Engine - Cooling System

Coolant recovery system (std., opt., n.a.)		Standard			
Coolant fill location (rad., bottle)		Bottle, coolant recovery			
Radiator cap relief valve pressure (kPa (psi))		103.4 (15)			
Circulation thermostat	Type (choke, bypass)	Choke			
	Starts to open at °C (°F)	90.6°C (195°F)			
Water pump	Type (centrifugal, other)	Centrifugal			
	GPM 1000 pump rpm	14			
	Number of pumps	One			
	Drive (V-belt, other)	V-belt			
Bearing (type)		Sealed double row ball			
By-pass recirculation [type (inter., ext.)]		Internal			
Radiator core [type (cross-flow vertical cellular tube and fin, other) and material]		Cross flow, aluminum, high efficiency radiator except LG4 AC and HD radiator and 169 AC radiator which is copper-brass			
Cooling system capacity	With heater—L(qt.)	14.41 (15.23)		14.96 (15.81)	
	With air cond.—L(qt.)	14.88 (15.73)		15.88 (16.78)	
	Opt. equipment [specify—L(qt.)]	14.96 (15.81), H.D. @@		--	
Water jackets full length of cyl. (yes, no)		Yes			
Water all around cylinder (yes, no)		Yes			
Radiator core	Std., A/C, HD	Std.	A/C or HD	A/C & HD	Std., A/C
	Width	527.8	667.5	668.0	667.5
	Height	437.8	437.8	429.7	437.8
	Thickness	23.5	23.5	40.2	23.5
	Fins per inch@	*	*	**	4.0
Fan	Std., elec., opt.	Std.		Opt.	Std., Elec
	Number of blades & type (flex, solid, material)	3, Aluminum, solid		7, Aluminum, solid	5, Plastic, solid
	Diameter & projected width	457.2		457.2	418.0
	Ratio (fan to crankshaft rev.)	1.08:1		.95:1	-
	Fan cutout type	Clutch		Clutch	-
	Drive [type (direct, remote)]	Belt		Belt	-
	RPM at idle (elec.)	-		-	2200
	Motor rating (wattage) (elec.)	-		-	150
	Motor switch (type & location) (elec.)	-		-	Temp. switch, engine cyl. head
	Switch point (temp., pressure) (elec.)	-		-	110.5°C
Fan shroud (material)		Plastic		Plastic	Plastic

@ - Distance between top of fins

* - 4.0 with manual trans.

3.5 with auto. trans.

** - 4.0 with manual trans.

3.0 with auto. trans

@@ - 15.88 with A/C and H.D. radiator

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

**Engine Description/Carb.
 Engine Code**

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO L09

2.8 LITER V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LC1

Engine - Fuel System

(See supplemental page for details of Fuel injection, Supercharger, Turbocharger, etc. if used)

Induction type: carburetor, fuel injection system, etc.			Fuel Injection	Carburetor
Carburetor	Mfr.		Rochester	Rochester Varajet
	Choke (type)		None	Electric
	Idle spd -rpm (spec neutral or drive and propane if used)	Manual	"	800 RPM - Neutral
		Automatic	"	600 RPM - Drive
Idle A/F mix.			Present-no adjust. provided	Preset-no adjustment provided
Fuel injection	Point of injection (no.)		Throttle body, one	--
	Constant, pulse, flow		Pulse	--
	Control (electronic, mech.)		ECM	--
	System pressure [kPa (psi)]		76 (11)	--
Intake manifold heat control (exhaust or water) thermostatic or fixed			Water	Exhaust
Air cleaner type	Standard		Replaceable paper element, single snorkel	
	Optional		--	
Fuel pump	Type (elec. or mech.)		Electric	Mechanical
	Location (eng., tank)		Fuel Tank	Lower left front of engine
	Pressure range [kPa (psi)]		83 (12)	41.4-51.7 (6-7.5)

Fuel Tank

Capacity (re-fill L (gallons))		59.8 (15.8)	61.3 (16.2)
Location (describe)		Rear center - over rear axle	
Attachment		Underbody strap	
Material		Steel	
Filler pipe	Location & material	Left rear quarter	
	Connection to tank	Solid solder	
Fuel line (material)		Steel	
Fuel hose (material)		Rubber	
Return line (material)		Steel	
Vapor line (material)		Steel	
Extended range tank	Opt. n.a.	Not Available	
	Capacity [L (gallons)]	"	
	Location & material	"	
	Attachment	"	
Auxiliary tank	Opt. n.a.	Not Available	
	Capacity [L (gallons)]	"	
	Location & material	"	
	Attachment	"	
	Selector switch or valve	"	
	Separate fill	"	

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69 HO

Engine - Fuel System (See supplemental page for details of Fuel injection, Supercharger, Turbocharger, etc. if used)

Induction type: carburetor, fuel injection system, etc.		Carburetor		
Carburetor	Mfg.	Rochester Quadrajet		
	Choke (type)	Electric		
	Idle spd -rpm (spec neutral or drive and propane if used)	Manual	700 RPM - Neutral	700 RPM - Neutral
		Automatic	500 RPM - Drive	600 RPM - Drive
			--	--
Idle A/F mix.		Preset-no adjustment provided		
Fuel injection	Point of injection (no.)	--		
	Constant, pulse, flow	--		
	Control (electronic, mech.)	--		
	System pressure (kPa (psi))	--		
Intake manifold heat control (exhaust or water) thermostatic or fixed		Exhaust		
Air cleaner type	Standard	Replaceable element, single snorkel		
	Optional	None		
Fuel pump	Type (elec. or mech.)	Mechanical		
	Location (eng., tank)	Lower right front of engine		
	Pressure range (kPa (psi))	51.7-62.0 (7.5-9.0)		

Fuel Tank

Capacity (refill L (gallons))		61.3 (16.2)
Location (describe)		Rear center - over rear axle
Attachment		Underbody strap
Material		Steel
Filler pipe	Location & material	Left rear quarter
	Connection to tank	Solid solder
Fuel line (material)		Steel
Fuel hose (material)		Rubber
Return line (material)		Steel
Vapor line (material)		Steel
Extended range tank	Opt. n a	Not Available
	Capacity (L (gallons))	"
	Location & material	"
	Attachment	"
Auxiliary tank	Opt. n a	"
	Capacity (L (gallons))	"
	Location & material	"
	Attachment	"
	Selector switch or valve	"
	Separate fill	"

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID) ELECTRONIC FUEL INJECTION RPO LQ9	2.8 LITER V6 (173 CID) 2-BBL. CARBURETOR RPO LC1
--	--

Vehicle Emission Control

Exhaust Emission Control	Type (air injection, engine modifications, other)		Computer Command Control & EFI	Air Injection with Computer Command Control
	Air Injection	Pump or pulse	Not Available	Vane
		Driven by	"	V-belt
		Air distribution (head, manifold, etc.)	"	Exh. Manifold & Catalytic Converter
		Point of entry	"	Manifold
	Exhaust Gas Recirculation	Type (controlled flow, open orifice, other)	Back Pressure Modulated Controlled Flow	Back Pressure Modulated Controlled Flow
		Exhaust source	Manifold	Manifold Exhaust Crossover
		Point of exhaust injection (spacer, carburetor, manifold, other)	Inlet Manifold	
	Catalytic Converter	Type	Bed, Ox. & Red.	Dual Bed, Ox. & Red.
		Number of	One	One
		Location(s)	Forward Beneath Underbody	Beneath RF Underbody
		Volume [L (in ³)]	2.623 (160)	2.782 (170)
		Substrate type	Pellets	Monolith
Crankcase Emission Control	Type (ventilates to atmosphere, induction system, other)		Induction System	
	Energy source (manifold vacuum, carburetor, other)		Manifold Vacuum	
	Discharges (to intake manifold, other)		Inlet Manifold	
	Air inlet (breather cap, other)		Carburetor Air Cleaner	
Evaporative Emission Control	Vapor vented to (crankcase, canister, other)	Fuel tank	Canister	
		Carburetor	--	Canister
	Vapor storage provision		Canister	
Electronic system	Closed loop (yes/no)		Yes	
	Open loop (yes/no)		No	

Engine - Exhaust System

Type (single, single with cross-over, dual, other)		Single	Single with Cross-over
Muffler no. & type (reverse flow, straight thru, separate resonator)		Reverse flow	
Resonator no. & type		None	
Exhaust pipe	Branch o.d., wall thickness	"	50.8 x 1.02 (2.0 x .040)
	Main o.d., wall thickness	50.8 x 1.09 (2.0 x .043)	57.15 x 1.02 (2.25 x .040)
	Material	Stainless Steel	(a)
Intermediate pipe	o.d. & wall thickness	50.8 x 1.09 (2.0 x .043)	57.17 x 1.14 (2.25 x .045)
	Material	Aluminum coated steel	Aluminum coated steel
Tail pipe	o.d. & wall thickness	50.8 x 1.09 (2.0 x .043)	50.8 x 1.09 (2.0 x .043)
	Material	Aluminum coated steel	Aluminum coated steel

(a) - Inner and outer tubing stainless steel with 2.00-2.15mm (.079-.085) air gap between tubes.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69 H0

Vehicle Emission Control

Exhaust Emission Control	Type (air injection, engine modifications, other)		Air Injection with Computer Command Control
	Air Injection	Pump or pulse	Vane
		Driven by	V-Belt
		Air distribution (head, manifold, etc.)	Exh. Manifold & Catalytic Converter
		Point of entry	Exhaust Manifold
	Exhaust Gas Recirculation	Type (controlled flow, open orifice, other)	Pulse Width Modulated
		Exhaust source	Manifold Exhaust Crossover
		Point of exhaust injection (spacer, carburetor, manifold, other)	Inlet Manifold
	Catalytic Converter	Type	Dual Bed, Oxidizing & Reducing
		Number of	One
		Location(s)	Beneath RF Underbody
		Volume [L (in ³)]	2,786 (170)
Substrate type		Monolith	
Crankcase Emission Control	Type (ventilates to atmosphere, induction system, other)		Induction System
	Energy source (manifold vacuum, carburetor, other)		Manifold Vacuum
	Discharges (to intake manifold, other)		Inlet Manifold
	Air inlet (breather cap, other)		Air Cleaner
Evaporative Emission Control	Vapor vented to (crankcase, canister, other)	Fuel tank	Canister
		Carburetor	Canister
Electronic system	Vapor storage provision		Canister
	Closed loop (yes/no)		Yes
	Open loop (yes/no)		No

Engine - Exhaust System

Type (single, single with cross-over, dual, other)		Single with dual tailpipes	Dual
Muffler no. & type (reverse flow, straight thru, separate resonator)		One, reverse flow	Two, reverse flow
Resonator no. & type		Dual with Z28	--
Exhaust pipe	Branch o.d. wall thickness	(a)	63.5 x 1.02(b) (2.5 x .04)(b)
	Main o.d. wall thickness	63.5 x 1.02 (2.5 x .04) (b)	76.2 x 1.02(b) (3.0 x .04)(b)
	Material	(See Notes)	
Inter-mediate pipe	o.d. & wall thickness	57.15 x 1.14 (2.25 x .045)(c)	
	Material	Aluminum coated steel	Stainless steel
Tail pipe	o.d. & wall thickness	50.8 x 1.07 (2.0 x .042) (d)	63.5 x 1.07 (2.5 x .04)
	Material	Aluminum coated steel	Aluminum coated steel

- (a) - RH Branch - 50.8x.86 (2.0x.034) laminated stainless steel tubing.
 LH Branch - 57.15x1.02 (2.25x.04) stainless steel outer tube, 50.8x.86 (2.0x.034) stainless steel inner tube, 2.00-2.15 (.085 air gap between tubes.
 (b) - Stainless steel inner and outer tubes with 2.00-2.15mm (.085) air gap between tubes.
 (c) - Z28 has dual pipes 44.5 x .86 (1.75 x .034), stainless steel, to dual resonators

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (•) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO LQ9

2.8 LITER V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LC1

Transmissions/Transaxle

Manual 3-speed (std., opt., n.a.)	Not Available	
Manual 4-speed (std., opt., n.a.)	Standard	Not Available
Manual 5-speed (std., opt., n.a.)	Optional	Standard
Manual overdrive (std., opt., n.a.)	Not Available	
Automatic (std., opt., n.a.)	Not Available	
Automatic overdrive (std., opt., n.a.)	Optional	

Manual Transmission/Transaxle

Number of forward speeds		4	5	5
Transmission ratios	In first	3.50	3.76	3.50
	In second	2.48	2.18	2.14
	In third	1.66	1.42	1.36
	In fourth	1.00	1.00	1.00
	In fifth	--	0.86	0.78
	In overdrive	--	--	--
	In reverse	3.50	3.76	3.39
Synchronous meshing (specify gears)		All forward gears		
Shift lever location		Floor		
Lubricant	Capacity [L (pt.)]	Man 4-spd-1.136L (2.4 pt) of SAE-80W		
	Type recommended	SAE-80W or SAE-80W-90 GL5		
	SAE viscosity number	Summer	SAE-80W or SAE-80W-90 GL5	
		Winter	SAE-80W or SAE-80W-90 GL5	
		Extreme cold	SAE-80W GL5	

* Manual 5-speed - 3.25L (6.87 pts.) of Dexron TT

Clutch (Manual Transmission)

Make & type		Borg & Beck Dry disc	
Type pressure plate springs		Diaphragm	
Total spring load [N (lb.)]		1360	5782 (1300)
No. of clutch driven discs		One	
Clutch facing	Material	Woven molded asbestos	
	Manufacturer	Borg & Beck	
	Part number	14045173	14036057
	Rivets/plate	36	
	Rivet size	.142 dia.	--
	Outside & inside dia	231.78 x 155.58 (9.125 x 6.125)	246 x 152.4 (9.685 6.0)
	Total eff. area [cm ² (in ²)	2318.25 (359.4)	292.88 (45.4)
	Thickness	7.50-8.00 mm (.295-.315)	
	Engagement cushion method	Driven plate wave spoke springs	
Release bearing	Type & method of lubrication	Ball thrust-prepacked and sealed	
Torsional damping	Method: springs, friction material	Coil springs and metal to metal friction	

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69

Transmissions/Transaxle

Manual 3-speed (std., opt., n.a.)	Not Available
Manual 4-speed (std., opt., n.a.)	"
Manual 5-speed (std., opt., n.a.)	Standard
Manual overdrive (std., opt., n.a.)	Not Available
Automatic (std., opt., n.a.)	"
Automatic overdrive (std., opt., n.a.)	Optional

Manual Transmission/Transaxle

Number of forward speeds		5
Transmission ratios	In first	2.95
	In second	1.94
	In third	1.34
	In fourth	1.00
	In fifth	0.73
	In overdrive	--
	In reverse	2.76
Synchronous meshing (specify gears)		All forward gears
Shift lever location		Floor
Lubricant	Capacity [L (pt.)]	3.25L
	Type recommended	Dexron II
	SAE viscosity number	Summer
		Winter
		Extreme cold

Clutch (Manual Transmission)

Make & type		Borg & Beck, dry disc
Type pressure plate springs		Diaphragm
Total spring load [N (lb.)]		7117 (1600)
No of clutch driven discs		One
Clutch facing	Material	Molded asbestos
	Manufacturer	Borg & Beck
	Part number	14033032
	Rivets/plate	40
	Rivet size	5.41 x 3.63 (.213 x .143)
	Outside & inside dia	262.6 x 165.0 (10.34 x 6.5)
	Total eff. area [cm ² (in ²)]	327.8 (50.8)
	Thickness	7.75 (.305)
	Engagement cushion method	Driven plate wave spoke springs
Release bearing	Type & method of lubrication	Ball thrust - prepacked and sealed
Torsional damping	Method: springs, friction material	Coil springs and metal-to-metal friction

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID)
 ELECTRONIC FUEL INJECTION
 RPO LQ9

2.8 LITER-V6 (173 CID)
 2-BBL. CARBURETOR
 RPO LC1

Automatic Transmission/Transaxle

Trade name		4-speed automatic
Type and special features (describe)		4-speed with torque converter clutch
Selector	Location	On Console
	Ltr./No. designation	P-R-N-D -D-2-1
Gear ratios	R	2.29
	D	1.00
	2	1.63*
	1	3.06*
	Overdrive	0.70*
Max. upshift speed - drive range (km/h (mph))		Not Available
Max. kickdown speed - drive range (km/h (mph))		"
Min. overdrive speed (km/h (mph))		"
Torque converter	Number of elements	3
	Max. ratio at stall	Not Available
	Type of cooling (air, liquid)	Liquid
	Nominal diameter	298
Lubricant	Capacity (refill L (pt.))	4.5l (9.5 pts.)
	Type recommended	GM Dexron II
Oil cooler (std., opt., NA, internal, external, air, liquid)		Standard, integral with radiator
		*Torque converter clutch in 2nd, 3rd & 4th gears.

Axle or Front Wheel Drive Unit

Type (front, rear)		Rear
Description		Semi-floating axle, overhung hypoid driven pinion and ring gear
Limited slip differential (type)		Disc clutch
Drive pinion offset		1.75
Drive pinion (type)		Hypoid gear
No. of differential pinions		Two
Pinion adjustment (shim, other)		Shim
Pinion bearing adj. (shim, other)		Collapsible spacer
Driving wheel bearing (type)		Roller bearing
Lubricant	Capacity (L (pt.))	1.66
	Type recommended	GL5 gear lube
	SAE viscosity number	Summer 80W or 80W-90 GL-5
		Winter 80W or 80W-90 GL-5
		Extreme cold 80W GL-5

Axle or Transaxle Ratio and Tooth Combinations (See "Power Teams" for axle ratio usage)

Axle ratio (or overall top gear ratio)		3.23	3.42	3.73
No. of teeth	Pinion	42	41	41
	Ring gear or gear	13	12	11
Ring gear od		191 (7.5)		
Transaxle	Transfer gear ratio	--		
	Final drive ratio	--		

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69

Automatic Transmission/Transaxle

Trade name		4-speed automatic
Type and special features (describe)		4-speed with torque converter clutch
Selector	Location	On console
	Ltr./No. designation	P-R-N-D -D-2-1
Gear ratios	R	2.29
	D	1.00
	2	1.63*
	1	3.06*
	Overdrive	0.70*
Max upshift speed - drive range (km/h (mph))		Not Available
Max kickdown speed - drive range (km/h (mph))		"
Min overdrive speed (km/h (mph))		"
Torque converter	Number of elements	3
	Max ratio at stall	Not Available
	Type of cooling (air, liquid)	Liquid
	Nominal diameter	298 (11.75)
Lubricant	Capacity (refill L (pt.))	4.5L (9.5 pts.)
	Type recommended	GM Dexron II
Oil cooler (std., opt., NA, internal, external, air, liquid)		Standard integral with radiator
*Torque converter clutch in 2nd, 3rd & 4th gears.		

Axle or Front Wheel Drive Unit

Type (front, rear)		Rear	
Description		Semi-floating axle, overhung hypoid driven pinion and ring gear	
Limited slip differential (type)		Disc clutch	
Drive pinion offset		1.75	
Drive pinion (type)		Hypoid gear	
No. of differential pinions		Two	
Pinion adjustment (shim, other)		Shim	
Pinion bearing adj. (shim, other)		Collapsible spacer	
Driving wheel bearing (type)		Roller bearing	
Lubricant	Capacity (L (pt.))	1.66	
	Type recommended	GL5 gear lube	
	SAE viscosity number	Summer	80W or 80W-90 GL-5
		Winter	80W or 80W-90 GL-5
		Extreme cold	80W GL-5

Axle or Transaxle Ratio and Tooth Combinations (See "Power Teams" for axle ratio usage)

Axle ratio (or overall top gear ratio)		3.08	3.23	3.42	3.73
No. of teeth	Pinion	40	42	41	41
	Ring gear or gear	13	13	12	11
Ring gear: o.d.		191 (7.5)			
Transaxle	Transfer gear ratio	--			
	Final drive ratio	--			

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5L-L4 151CID EFI RPO LQ9	2.8L-V6 173CID 2-Bbl. CARB RPO LC1	5.0L-V8 305CID 4-Bbl. CARB. RPO LG4	5.0L-V8 305CID 4-Bbl. CARB RPO L69
----------------------------------	--	---	--

Propeller Shaft — Conventional Drive

Type (straight tube, tube-in-tube, internal-external damper, etc.)		Straight Tube	
Outer diam. x length* x wall thickness	Manual 3-speed trans	Not Available	
	Manual 4-speed trans.	63.5 x 1135 x 1.65 mm (2.5 x 44.7 x .065 in.)	
	Manual 5-speed trans	63.5 x 1057 x 1.65 mm (2.5 x 41.6 x .065 in.)	
	Overdrive	Not Available	
	Automatic transmission	63.5 x 1057 x 1.65 mm (2.5 x 41.6 x .065 in.)	
Inter-mediate bearing	Type (plain, anti-friction)	None	
	Lubrication (fitting, prepack)	"	
Slip yoke	Type	Splined	
	Number of teeth	27	
	Spline o.d.	29.84 mm (1.174 in.)	
Universal joints	Make and mfg. no	Front	Saginaw size 44
		Rear	Saginaw size 44
	Number used		Two
	Type (ball and trunnion, cross)		Cross
	Rear attach (u-bolt, clamp, etc.)		Strap and bolt
	Bearing	Type (plain, anti-friction)	Anti-friction
Lubric. (fitting, prepack)		Prepacked	
Drive taken through (torque tube, arms or springs)		Torque Arm	
Torque taken through (torque tube, arms or springs)		Torque Arm	

* Centerline to centerline of universal joints, or to centerline of rear attachment

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type And/Or
 Engine Displacement

2-Door Hatchback Coupe			
L4	V6	V8	Z28

Suspension — General

Car leveling	Std./opt./n.a.	Not available
	Type (air, hyd., etc.)	Not available
	Manual/auto. controlled	Not available
Provision for brake dip control		Front suspension geometry
Provision for accel. squat control		Rear suspension geometry
Special provisions for car jacking		Jacking provisions on rocker
Shock absorber (front & rear)	Type	Direct double-acting hydraulic
	Make	Delco
	Piston diameter	54mm (2.125 in) front; 25 (1.0) rear
	Rod diameter	13.49mm (0.53 in)

Suspension — Front

Type and description		Independent w/coil springs, Modified MacPherson strut.		
Travel	Full jounce	75.0 mm (2.95 in)		
	Full rebound	104.0 mm (4.09 in)		
Spring	Type (coil, leaf, other)	Coil		
	Material	Alloy steel		
	Size (coil design height & i.d., bar length x dia.)	260 x 103.0; 2490 x 15 mm, base (10.2 x 4.06; 98 x .59 in)		
	Spring rate [N/mm (lb./in.)]	58.0(331.0) all exc.Z28, F41-64.0(365.0) all exc.Z28,Z28-96.0(548.0)		
	Rate at wheel [N/mm (lb./in.)]	16.3(93.0) all exc.Z28, F41-17.7(101.0) all exc.Z28,Z28-25.6(146.0)		
Stabilizer	Type (link, linkless, frameless)	Link		
	Material & bar diameter	*	*	* Steel 32mm (1.3 in)

Suspension — Rear

Type and description		Salisbury axle w/torque arm, LCA, track bar, coil springs		
Drive and torque taken through		LCA & torque arm		
Travel	Full jounce	87.0 mm (3.4)		
	Full rebound	118.0 mm (4.6)		
Spring	Type (coil, leaf, other)	Coil		
	Material	Alloy steel		
	Size (length x width, coil design height & i.d., bar length & dia.)	254.0 x 102.6; 2709 x 12.0 (10 x 4.03; 27.9 x .472 in)		
	Spring rate [N/mm (lb./in.)]	18.0 (103.0) all exc. Z28, Z28-32.0 (183.0)		
	Rate at wheel [N/mm (lb./in.)]	22.7 (130.0) all exc. Z28, Z28-40.5 (231.0)		
Stabilizer	Mounting insulation (type)	Rubber isolated		
	ii leaf	No. of leaves	--	
		Shackle (comp. or tens.)	--	
Stabilizer	Type (link, linkless, frameless)	Link		
	Material & bar diameter	**	**	** 21 mm (0.8 in)
Track bar (type)		HAT section w/rubber bushings		

* Base - steel 27 mm (1.1 in) ** F41: steel 12 mm (0.5 in)
 F41 - steel 30 mm (1.2 in)

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type And/Or
 Engine Displacement

2-DOOR HATCHBACK COUPES		
1FP87	1FS87	Z28

Brakes — Service

Description			Single caliper disc front, duo-servo drum rear
Brake type (std., opt., n.a.)	Front (disc or drum)		Disc
	Rear (disc or drum)		Drum (Rear disc optional for V8 models)
Self-adjusting (std., opt., n.a.)			Standard
Special valving	Type (proportion, delay, metering, other)		Metering and Proportioning
Power brake (std., opt., n.a.)			Standard
Booster type (remote, integral, vac., hyd., etc.)			200 mm (7.87 in) Tandem Vacuum
Vacuum source (inline, pump, etc.)			Inline (intake manifold)
Vacuum reservoir (volume in. ³)			None
Vacuum pump-type (elec., gear driven, belt driven, if other so state)			"
Anti-skid device type (std., opt., n.a.) (F/R)			Not Available
Effective area [cm ² (in. ²)]*			615.5 (95.42)
Gross lining area [cm ² (in. ²)]** (F/R)			691.6 (107.22)
Swept area [cm ² (in. ²)]*** (F/R)			1985.1 (307.7)
Rotor	Outer working diameter	F/R	267 mm (10.5 in)/ --
	Inner working diameter	F/R	171.5mm (6.75 in)/ --
	Thickness	F/R	26.2 mm (1.03 in)/ --
	Material & type (vented/solid)	F/R	Cast Iron, vented/ --
Drum	Diameter (nominal)	F/R	--/241 mm (9.5)
	Type and material	F/R	--/Cast iron finned (aluminum drum) (b)
Wheel cylinder bore F/R			64 mm (2.5 in) / 19 mm (0.75 in)
Master cylinder	Bore/stroke	F/R	24 mm (0.94) / 37.1 mm (1.46) disc/drum (a)
Pedal arc ratio			3.25:1
Line pressure at 445 N (100 lb.) pedal load [kPa (psi)]			--
Lining clearance per shoe F/R			Self-adjusting / self-adjusting
Brake lining	Front wheel	Bonded or riveted (rivets/seg.)	Riveted, 8
		Rivet size	5.33 x 7.92 (.210 x .312)
		Manufacturer	Delco Moraine
		Lining code	--
		Material	Semi-metallic
		**** Primary or out-board	125 x 48.4 x 11.04 (4.92 x 1.91 x .435)
		Size Secondary or in-board	Same
		Shoe thickness (no lining)	Inboard (15.84 (.620)); Outboard 13.97 (.550)
	Rear wheel	Bonded or riveted (rivets/seg.)	Riveted 10 primary, 12 secondary
		Manufacturer	Delco Moraine
		Lining code	--
		Material	Asbestos
		**** Primary or out-board	192.5 x 50.8 x 4.98 (7.58 x 2.0 x 0.196)
		Size Secondary or in-board	249.6 x 50.8 x 6.75 (9.83 x 2.0 x 0.266)
		Shoe thickness (no lining)	9.7 (0.380)

* Excludes rivet holes, grooves, chamfers, etc.

** Includes rivet holes, grooves, chamfers, etc.

*** Total swept area for four brakes. (Drum brake: Widest lining contact width for each brake x its contact circumference.) (Disc brake: Square of Outer Working Dia. minus Square of Inner Working Dia. multiplied by Pi/2 for each brake.)

**** Size for drum brakes includes length x thickness.

(a) Optional 4-wheel disc brakes, bore 25.4 mm (1.00), stroke 37.35 mm (1.47)

(b) Z28 with L69 engine and manual transmission only

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type And/Or
 Engine Displacement

1FP87	1FS87	1FP87 with (RPO Z28)
-------	-------	-------------------------

Tires And Wheels (Standard)

Tires	Size (load range, ply)		P195/75R-14BW*	P205/70R-14 BW*	P215/65R-15 WL
	Type (bias, radial, etc.)		Steel belted radials		
	Inflation pressure (cold) for recommended max. vehicle load	Front [kPa (psi)]	240 (35)		
		Rear [kPa (psi)]	240 (35)		
	Rev./mile—at 70 km/h (45 mph)		508	511	498
Wheels	Type & material		Short spoke disc, steel		Cast aluminum
	Rim (size & flange type)		14 x 6	14 x 7	15 x 7
	Wheel offset		12.7 (.50)	8.0 (.315)	8.0 (.315)
	Attachment	Type (bolt or stud)	Stud		
		Circle diameter	120.7 (4.75)		
		Number & size	5-M12 x 1.5 - 6H-thd. (metric)		
Spare	Tire and wheel (same, if other describe)		15 x 4; T125/70D15, Bias Ply, Nylon (Temporary type)		
	Storage position & location (describe)		Vertically adjacent to R.H. quarter panel		

Tires And Wheels (Optional)

Size (load range, ply)	P205/70R-14 BW, WL, WW*	P205/70R14 WS*	P215/65R-15BW
Type (bias, radial, etc.)	Steel belted radials	Steel belted radial	with L69
Wheel (type & material)	Short spoke disc, steel		
Rim (size, flange type and offset)	14 x 7 (8.0 (.315))		
Size (load range, ply)			
Type (bias, radial, etc.)			
Wheel (type & material)			
Rim (size, flange type and offset)			
Size (load range, ply)			
Type (bias, radial, etc.)			
Wheel (type & material)			
Rim (size, flange type and offset)			
Size (load range, ply)			
Type (bias, radial, etc.)			
Wheel (type & material)			
Rim (size, flange type and offset)			
Spare tire and wheel (if configuration is different than road tire or wheel, describe optional spare tire and/or wheel location & storage position)	Tire-Base - T125/70D15 without positraction with 15 x 4 wheel P195/75D14 with positraction with 14 x 5 wheel		

Brakes -- Parking

Type of control		Foot pedal-application: "T" handle-release
Location of control		Left of steering column under instrument panel
Operates on		Rear service brakes
If separate from service brakes	Type (internal or external)	--
	Drum diameter	--
	Lining size (length x width x thickness)	--

*All seasons mod and snow, 4th generation GM TPC tires

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (•) 9-83

Body Type And/Or
 Engine Displacement

1FP87 2-DOOR HATCHBACK COUPES
 1FS87 Z28

Steering

Manual (std., opt., n.a.)				Not Available		
Power (std., opt., n.a.)				Standard		
Adjustable steering wheel (tilt, swing, other)		Type and description		Tilt-universally jointed steering shaft at base of steering wheel - 6 position		
		(Std., opt., n.a.)		Optional		
Wheel diameter		Manual		Not Available		
		Power		368 mm (14.5 in)		
Turning diameter m (ft.)	Outside front	Wall to wall (l. & r.)		12.02 (39.4)		
		Curb to curb (l. & r.)		11.25 (36.9)		
	Inside rear	Wall to wall (l. & r.)		Not Available		
		Curb to curb (l. & r.)		"		
Scrub Radius				"		
Manual	Gear	Type		Not Available		
		Make		"		
		Ratios	Gear	"		
			Overall	"		
	No. wheel turns (stop to stop)		"			
Power	Type (coaxial, linkage, etc.)		Coaxial			
	Make		Saginaw Steering Gear			
	Gear	Type		Semi-reversible recirculating ball		
		Ratios	Gear	15/13:1(a)	12.7:1(b)	
			Overall	16.5/14.3(a)	14:1	
	Pump (drive)		'V' belt			
No. wheel turns (stop to stop)		2.7	3.0	2.5		
Linkage	Type		Parallelogram			
	Location (front or rear of wheels, other)		Front			
	Drag links (trans. or longit.)		None			
	Tie rods (one or two)		Two			
Steering axis	Inclination at camber (deg.)		Not Available			
	Bearings (type)	Upper	Ball stud			
		Lower	Ball stud			
		Thrust	None			
Steering spindle & joint type				Steering knuckle with spherical joints		
Wheel spindle	Diameter	Inner bearing		31.73-31.74 (1.2493-1.2498)		
		Outer bearing		21.04-21.42 (0.83-0.84)		
	Thread (size)		3/4-20 UNEF-3A (modified)			
	Bearing (type)		Tapered roller			

- (a) Sport Coupe with F41, Gear 14:1, Overall 15.4:1
 (b) Z28

MVMA Specifications Form
Passenger Car
(METRIC (U.S. Customary))

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type And/Or
 Engine Displacement

2-DOOR HATCHBACK COUPES		
1FP87	1FS87	1FP87/Z28

Wheel Alignment

Front wheel at curb mass (wt.)	Service checking	Caster (deg.)	+2° to +4°
		Camber (deg.)	+0.2° to +1.8°
		Toe-in	+0.1° to +0.3° +0.5° to +0.25°
	Service reset*	Caster	+3° +/- 0.5°
		Camber	+1° +/- 0.5°
		Toe-in	+0.2° +/- .05° +0.15° to +/- .05°
	Periodic M.V. inspection	Caster	+1° to 5°
		Camber	-0.5° to +2.5°
		Toe-in	-0.1° to +0.5° -0.15° to +.45°
Rear wheel at curb mass (wt.)	Service checking	Camber (deg.)	Not Applicable
		Toe-in	"
	Service reset*	Camber	"
		Toe-in	"
	Periodic M.V. inspection	Camber	"
		Toe-in	"

* Indicates pre-set, adjustable, trend set or other.

Electrical — Instruments and Equipment

Sport Coupe*

Z28

Berlinetta

Speedometer	Type	Round dial, pointer	0-85 mph**	Digital 0-85 mph**
	Trip odometer (std., opt., n.a.)	Optional	Standard	Digital - standard
EGR maintenance indicator		Not Available	Not Available	Not Available
Charge indicator	Type	Tell-Tale Warn. Lt.	Electric gage	Elect gage&Tell Tale
	Warning device	"	Not Available	"
Temperature indicator	Type	Tell-Tale Warn. Lt.	Electric gage	Elect gage&Tell Tale
	Warning device	"	Not Available	"
Oil pressure indicator	Type	Tell-Tale Warn. Lt.	Electric gage	Elect gage&Tell Tale
	Warning device	"	Not Available	"
Fuel indicator	Type	Electric gage with pointer		Elect gage&Tell Tale
	Warning device	Not Available		Not Available
Wind-shield wiper	Type (standard)	Two speed-manual control-fluidic		2-Spd-Elect Cont-Fl
	Type (optional)	Intermittent		Intermittent std
	Blade length	454 mm (18 inches)		
	Swept area [cm ² (in.2)]	5792 (898.0)		
Wind-shield washer	Type (standard)	Manual control		Electronic control
	Type (optional)	Not Available		Not Available
	Fluid level indicator	"		Standard
Horn	Type	Vibrator		
	Number used	One (dual optional)		Dual
Other			Tachometer std (Round dial, pointer)	Digital & bar Radiator level Tell Tale. Systems OK Tell-Tale

* Sport coupe same as Z28 when optional gage package is ordered.

** Metric conversions included.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

2.5 LITER-L4 (151 CID) ELECTRONIC FUEL INJECTION RPO LQ9	2.8 LITER V6 (173 CID) 2-BBL. CARBURETOR RPO LC1
--	--

Electrical – Supply System

Battery	Make	Delco Remy	
	Model, std., (opt.)	70-405(a), 75-500(b)	70-315(a), 75-500(b)
	Voltage	12 Volt	
	Amps at 0°F cold crank	405(a), 500(b)	315(a), 500(b)
	Minutes-reserve capacity	(a)75 minutes, (b)90 minutes	(a)75 minutes, (b)90 minutes
	Amp/hrs. - 20 hr. rate	--	--
	Location	Left side engine compartment	Engine compartment right front
Generator or alternator	Type and rating	(c,d,e)	
	Ratio (alt. crank/rev.)	(c,d,e)	
	Optional (type & rating)	None	
Regulator	Type	Micro circuit units integral with alternator	

Electrical – Starting System

Start motor	Current drain at	270 @ - 20°F	235 @ - 20°F
Motor drive	Engagement type	Positive shift solenoid	
	Pinion engages from (front, rear)	Rear	

Electrical – Ignition System

Type	Conventional (std., opt., n.a.)	--	
	Electronic (std., opt., n.a.)	--	
	Other (specify)	High Energy Ignition (HEI)	
Coil	Make	Delco Remy	
	Model	Separate	Separate-1115458
	Current	Engine stopped -- A	0
		Engine idling -- A	5.5 max.
Spark plug	Make	AC	
	Model	R44TSX	RV12YC4
	Thread (mm)	14	M14 x 1.25 SAE
	Tightening torque [N-m (lb. ft.)]	20 (15)	9-20 (7-15)
	Gap	1.524 (.060)	1.143 (.045)
Distributor	Make	Delco Remy	
	Model	1103551	1103523

Electrical – Suppression

Locations & type	Internal alternator capacitor, non-metallic high-tension ignition cables, resistor spark plugs, ignition coil by-pass capacitor, internal AC blower motor by-pass capacitor & A/C compression diode, with radio provisions; hood grounding clip, engine to dash panel strap, fuse block capacitor and on "heater only" blower motors and coax capacitor.
------------------	--

- (a) - Standard battery
- (b) - With H.D. option UA1
- (c) - 42 Amp with heater, 2.63:1 ratio
- (d) - 66 Amp with heater, and heated backlite, 2.63:1 ratio
- (e) - 78 Amp with A/C, 2.63:1 ratio

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Engine Description/Carb.
 Engine Code

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO LG4

5.0 LITER-V8 (305 CID)
 4-BBL. CARBURETOR
 RPO L69

Electrical – Supply System

Battery	Make	Delco Remy	
	Model, std., (opt.)	75-500	
	Voltage	12 Volt	
	Amps at 0°F cold crank	500	
	Minutes-reserve capacity	90 minutes	
	Amp/hrs. - 20 hr. rate	--	
	Location	Engine compartment right front	
Generator or alternator	Type and rating	42 Amp standard, 78 Amp A/C 94 Amp standard	
	Ratio (alt. crank/rev.)	2.70 (non A/C), 3.09 A/C	
	Optional (type & rating)	None	
Regulator	Type	Micro circuit units integral with alternator	

Electrical – Starting System

Start, motor	Current drain at	305 @ - 20°F	390 @ - 20°F
Motor drive	Engagement type	Positive shift solenoid	
	Pinion engages from (front, rear)	Rear	

Electrical – Ignition System

Type	Conventional (std., opt., n.a.)		--
	Electronic (std., opt., n.a.)		--
	Other (specify)		High Energy Ignition (HEI)
Coil	Make	Delco Remy	
	Model	Integral with Distributor	
	Current	Engine stopped – A	--
		Engine idling – A	--
Spark plug	Make	AC	
	Model	R45TS	
	Thread (mm)	14 x 1.25 SAE	
	Tightening torque [N-m (lb., ft.)]	9-20 (7-15)	
	Gap	1.143 (.045)	
Distributor	Make	Delco Remy	
	Model	1103460	

Electrical – Suppression

Locations & type	Internal alternator capacitor, non-metallic high-tension ignition cables, resistor spark plugs, ignition coil by-pass capacitor, internal AC blower motor by-pass capacitor & A/C compression diode, with radio provisions; hood grounding clip, engine to dash panel strap, fuse block capacitor and on "heater only" blower motors and coax capacitor.		
------------------	--	--	--

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type

2-Door Hatchback Coupes		
1FP87	1FS87	Z28

Body - Miscellaneous Information

Type of finish (lacquer, enamel, other)	Lacquer or enamel	
Hood	Hinge location (front, rear)	Rear
	Type (counterbalance, prop)	Gas strut assist
	Release control (internal, external)	Internal
Trunk lid	Type (counterbalance, other)	--
	Internal release control (elec., mech., n.a.)	--
Hatch back lid	Type (counterbalance, other)	Dual gas struts
	Internal release control (elec., mech., n.a.)	Electric release optional
Bumper front	Bar material & mass (wt.)	Front end facia; urethane 4.808 (10.6)
	Reinforcement material & mass (wt.)	Front bar asm.-steel 10.864(23.9) Absorber-Polyethylene 3.005(6.6)
Bumper rear	Bar material & mass (wt.)	Rear end facia; urethane 3.588 (7.9)
	Reinforcement material & mass (wt.)	Rear bar asm. steel 6.420(14.2); Absorber-Polyethylene 2.699 (5.6)
Vent window control (crank, friction, pivot, power)	Front	Not Available
	Rear	--
Seat cushion type	Front	Molded foam pad
	Rear	Molded foam pad
	3rd seat	--
Seat back type	Front	Molded foam pad
	Rear	Molded foam pad
	3rd seat	--
Vehicle ident. no. location	Top left hand side of instrument panel pad - visible from outside vehicle	

Frame

Type and description (separate frame, unitized frame, partially-unitized frame)

Full integral body frame, includes bolted on front suspension crossmember.

Glass

Backlight slope angle (deg.)	H121	70.0°
Windshield slope angle (deg.)	H122	62.0°
Tumble-Home (deg.)	W122	31.5°
Windshield glass exposed surface area [cm ² (in. ²)]	S1	9000.4 (1395.1)
Side glass exposed surface area [cm ² (in. ²)]	S2	6519.8 (1010.6)
Backlight glass exposed surface area [cm ² (in. ²)]	S3	6232.0 (966.0)
Total glass exposed surface area [cm ² (in. ²)]	S4	21751.2 (3371.7)
Windshield glass (type)		Curved-Laminated Plate
Side glass (type)		Curved-Tempered Plate
Backlight glass (type)		Curved-Tempered Plate

MVMA Specifications Form

Passenger Car

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised: (*)

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

Body Type

SAE Ref. No.	2-Door Hatchback Coupes		
	1FP87	1FS87	Z28

Restraint System

Active restraint system	Standard/ optional	Standard
	Type and description	3-point shoulder/lap belts - front; lap belts-rear
	Location	2-front, 2-rear
Passive seat belts	Standard/ optional	Not available
	Power/ manual	--
	2 or 3 point	--
	Knee bar/ lap belt	--

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type

2-Door Hatchback Coupes		
1FP87	1FS87	Z28

Convenience Equipment

Power windows	Side windows	Optional
	Vent windows	Not Available
	Backlight or tailgate	Not Available (Electric release for hatch optional)
Power seats (specify type as well as availability)		Optional 6-way power driver's seat
Reclining front seat back (r-l or both)		Standard - both
Radio (specify type as well as availability)		See below
Premium sound system (specify)		Extended range sound system (ERS) with all stereo units
Rear seat speaker		Dual rear speaker opt. for monaural units, included in ERS
Power antenna		Optional
Clock		Analog opt. Spt Cpe; std Z28. Digital in radio std Berlin, opt. others
Air conditioner (specify type)		Optional. Manual control Spt Cpe & Z28. Electronic control Berlinetta
Speed warning device		Not Available
Speed control device		Optional w/resume speed
Ignition lock lamp		Not Available
Dome lamp		Standard
Glove compartment lamp		Standard (compartment in floor console)
Luggage compartment lamp		Optional
Underhood lamp		Optional
Courtesy lamp		Opt Spt Cpe, std Z28 and Berlinetta
Map lamp		Opt Spt Cpe and Z28, std Berlinetta
Cornering lamp		Not Available
Rear window defroster electrically heated		Optional
Rear window defogger		Not Available
T-bar roof (describe)		Optional - two tinted glass panels
Sun roof (describe)		Not Available
Theft protection—type		Lock mounted on steering column - locks steering wheel, transmission shift levers and ignition

	<u>Sport Coupe and Z28</u>	<u>Berlinetta</u>
Radios	o AM (Opt.)	-
	o AM-FM (Opt.)	-
	o AM-FM (Opt.)	-
	o ETR AM-FM stereo (Opt.)	-
	o ETR AM-FM stereo w/clock(Opt.)	o Remote ETR AM-FM stereo
	o ETR AM-FM stereo/cassette w/clock (Opt.)	w/clock (standard)
	o ETR AM-FM stereo equalizer/cassette w/clock (Opt.)	o Remote ETR AM-FM stereo equalizer/cassette w/clock(Opt.)

Passenger Car

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

Car Line CAMAROModel Year 1984 Issued 7-83 Revised (*) 9-83

All dimensions to ground are for comparative purposes only. Dimensions are to be shown for all base body models of each car line.
SAE Ref. no. refers to the definition published in SAE Recommended Practice.
J1100a "Motor Vehicle Dimensions," unless otherwise specified.

Body Type	SAE Ref. No.	2-Door Hatchback Coupes		
		1FP87	1FS87	Z28

Width

Tread (front)	W101	1541 (60.7)
Tread (rear)	W102	1564 (61.6)
Vehicle width	W103	1850 (72.8)
Body width at Sg RP (front)	W117	1830 (72.0)
Vehicle width (front doors open)	W120	3939 (155.1)
Vehicle width (rear doors open)	W121	--

Length

Wheelbase	L101	2566 (101.0)
Vehicle length	L103	4771 (187.8)
Overhang (front)	L104	1080 (42.5)
Overhang (rear)	L105	1125 (44.3)
Upper structure length	L123	2669 (105.1)
Rear wheel C/L "X" coordinate	L127	2138 (84.2)
Cowl point "X" coordinate	L125	108 (4.3)

Height **

Passenger distribution (frt./rear)	PD1,2,3	**	
Trunk/cargo load		**	
Vehicle height	H101	1271 (50.0)	1278 (50.3)
Cowl point to ground	H114	898 (35.3)	905 (35.6)
Deck point to ground	H138	915 (36.0)	922 (36.3)
Rocker panel-front to ground	H112	193 (7.6)	200 (7.9)
Bottom of door closed-front to grd.	H133	357 (14.0)	364 (14.3)
Rocker panel-rear to ground	H111	193 (7.6)	200 (7.9)
Bottom of door closed-rear to grd.	H135	--	

Ground Clearance **

Front bumper to ground	H102	283 (11.2)	261 (10.3)
Rear bumper to ground	H104	317 (12.5)	374 (14.7)
Bumper to ground (front at curb mass (wt.))	H103	304 (12.0)	275 (10.8)
Bumper to ground (rear at curb mass (wt.))	H105	334 (13.2)	384 (15.1)
Angle of approach	H106	16.5°	13.5°
Angle of departure	H107	20.0°	20.5°
Ramp breakover angle	H147	12.9°	13.5°
Rear axle differential to ground	H153	172 (6.8) (a)	171 (6.7)
Min. running ground clearance	H156	121 (4.8)	128 (5.1)
Location of min. run. grd. clear		Front crossmember	

All linear dimensions are in millimeters (inches) and all mass (weight) specifications are in kilograms (pounds).

**** All Vehicle Height And Ground Clearances Are Made Using EPA Loaded Vehicle Weight, Loading Conditions.**

EPA LOADED VEHICLE WEIGHT is The Base Vehicle Weight Plus All Coolant And Fluids Necessary For Operation Plus 100% Of The Fuel Capacity, Plus The Weight Of All Options And Accessories Which Weigh Three Pounds Or More And Which Are Sold On At Least 33% Of The Car Line, Plus Two Occupants.

MVMA Specifications Form**Passenger Car****METRIC (U.S. Customary)****Car and Body Dimensions** See Key Sheets for definitionsCar Line CAMAROModel Year 1984Issued 7-83

Revised (*)

Body Type

SAE Ref. No.	2-Door Hatchback Coupes		
	1FP87	1FS87	Z28

Front Compartment

Sg RP front, "X" coordinate	L31	1050 (41.3)
Effective head room	H61	940 (37.0)
Max. eff. leg room (accelerator)	L34	1092 (43.0)
Sg RP (front to heel)	H30	181 (7.1)
Design H-point front travel	L17	192 (7.6)
Shoulder room	W3	1460 (57.5)
Hip room	W5	1430 (56.3)
** Upper body opening to ground	H50	
Steering wheel angle	H18	18.0°
Back angle	L40	26.5°

Rear Compartment

Sg RP Point couple distance	L50	668 (26.3)
Effective head room	H63	905 (35.6)
Min. effective leg room	L51	756 (29.8)
Sg RP (second to heel)	H31	183 (7.2)
Knee clearance	L48	-15 (-0.6)
Compartment room	L3	582 (22.9)
Shoulder room	W4	1430 (56.3)
Hip room	W6	1087 (42.8)
** Upper body opening to ground	H51	

Luggage Compartment

Usable luggage capacity (L (cu. ft.))	V1	--
** Litter height	H195	881 (34.7) 888 (35.0)

All linear dimensions are in millimeters (inches)

**** EPA Loaded Vehicle Weight, Loading Conditions**

*All Interior Dimensions Are Measured With The Seating Reference Point (SgRP) _____mm
(1 Seat Adjuster Notch) Forward Of Rearmost Seat Position.*

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) 9-83

Body Type

SAE Ref. No.	2-Door Hatchback Coupes		
	1FP87	1FS87	Z28

Station Wagon - Third Seat

Shoulder room	W85	
Hip room	W86	
Effective leg room	L86	Not
Effective head room	H86	Applicable
Effective T-point head room	H89	
Seat facing direction	SD1	

Station Wagon - Cargo Space

Cargo length (open front)	L200	
Cargo length (open second)	L201	
Cargo length (closed front)	L202	
Cargo length (closed second)	L203	
Cargo length at belt (front)	L204	
Cargo length at belt (second)	L205	Not
Cargo width (wheelhouse)	W201	Applicable
Rear opening width at floor	W203	
Opening width at belt	W204	
Max. rear opening width above belt	W205	
Cargo height	H201	
Rear opening height	H202	
Tailgate to ground height	H250	
Front seat back to load floor height	H197	
Cargo volume index - L (cu.ft.)	V2	
Hidden cargo volume - L (cu. ft.)	V4	

Hatchback - Cargo Space

Front seat back to load floor height	H197	358 (14.1)
Cargo length at front seat back height	L208	892 (35.1)
Cargo length at floor (front)	L209	1556 (61.3)
Cargo volume index - L (cu.ft.)	V3	884 (31.2) *
Hidden cargo volume - L (cu. ft.)	V4	--

Aerodynamics*

Wheel lip to ground, front	Not Available	
Wheel lip to ground, rear	"	
Frontal area	"	

* Describe measurement method.

A printed or computer tape supplement containing additional car and body dimensions and/or drawings (based in part on SAE J1100a "Motor Vehicle Dimensions") may be available from the manufacturer.

All dimensions are in millimeters (inches).

* V-II a Hatchback, cargo volume index-second seat-up, 328 (11.6)

MVMA Specifications Form**Passenger Car****METRIC (U.S. Customary)****Car and Body Dimensions** See Key Sheets for definitionsCar Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) _____

Body Type

2-Door Hatchback Coupes

1FP87

1FS87

Z28

Vehicle Fiducial MarksFiducial Mark
Number*

Define Coordinate Location

Front

X - Fiducial mark to vertical base grid line - front, measured horizontally from the base grid line to the front fiducial mark located on top of the front seat adjuster mounting bolt.

Y - Fiducial mark to centerline of car - front, width measurement made from centerline car to fiducial mark located on top of the front seat adjuster mounting bolt.

Z - Fiducial mark to horizontal base grid line - front, measured vertically from base grid line to front fiducial mark located on top of the front seat adjuster mounting bolt.

Rear

X - Fiducial mark to vertical base grid line - front, measured horizontally from base grid line to rear fiducial mark located on rear underbody crossbar.

Y - Fiducial mark to centerline of car - rear, width measurement made from centerline of car to fiducial mark located on the rear underbody crossbar.

Z - Fiducial mark to horizontal base grid line - rear, measured vertically from base grid line to the rear fiducial mark located on rear underbody crossbar.

Fiducial
Mark
Number

Front	W21	540 (21.3)	
	L54	2688 (105.8)	
	H81	468 (18.4)	
	H161	296 (11.6)	
	** H163	277 (10.9)	284 (11.2)

Rear	W22	548 (21.6)	
	L55	4815 (189.6)	
	H82	596 (23.5)	
	H162	417 (16.4)	
	** H164	400 (15.7)	407 (16.0)

* Reference - SAE Recommended Practice, J182a, Motor Vehicle Fiducial Marks - September, 1973.
All linear dimensions are in millimeters (inches).**** EPA Loaded Vehicle Weight, Loading Conditions**

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*)

Body Type

SAE Ref. No.	2-Door Hatchback Coupes		
	1FP87	1FS87	Z28

Lamps and Headlamp Shape*

Height above ground to center of bulb or marker	Headlamp (H1 27)	Highest**	641 (25.2)	
		Lowest	641 (25.2)	
	Taillamp (H1 28)	Highest**	776 (30.5)	
		Lowest	776 (30.5)	
	Sidemarker	Front	511 (20.1)	
		Rear	706 (27.8)	
Distance from C/L of car to center of bulb	Headlamp	Inside	487.5 (19.2)	
		Outside**	667.5 (26.3)	
	Taillamp	Inside	--	
		Outside**	610.5 (24.0)	
	Directional	Front	574.5 (22.6) except Z28	585.5 (23.0)
		Rear	481.0 (18.9)	
	Headlamp shape			Rectangular

* Measured at curb mass (weight)

** If single lamps are used enter here.

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (•) 9-83

* Reference — SAE J1100a, Motor vehicle dimensions, curb weight definition.
** Shipping mass (weight) definition —

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS. kg. (weight, lb.)			
	Front	Rear	Total	
Power Seat, 6-Way, (Driver's side only) RPO-AG9	2.4 (5.3)	2.8 (6.2)	5.2 (11.5)	All models (merchandising option for RPO-AC3)
Power Door Locks - Electric. RPO-AU3	.8 (1.8)	1.0 (2.2)	1.8 (4.0)	All models
Power Windows - Electric RPO-A31	1.6 (3.5)	1.6 (3.5)	3.2 (7.0)	All models
Lock Release-Liftback Electric. RPO-A90	.2 (0.4)	.4 (0.9)	.6 (1.3)	All models
Acoustical Insulation Package -Forced w/B18 Custom (except Z28). -Includes U29 Courtesy Lights RPO-BS1	3.0 (6.6)	7.2 (15.9)	10.2 (22.5)	Optional Sport Coupe & Z28, Base equipment on Berlinetta
Molding Roof Drip-Black (Not available with RPO-CC1 Removable Hatch Roof Panels) RPO-BX5	.2 (0.4)	.2 (0.4)	.4 (0.9)	All models
Mats, Front Floor - Colored-Keyed Carpet RPO-B34	.8 (1.8)	.4 (0.9)	1.2 (2.7)	All models
Mats, Rear Floor - Colored-Keyed carpet RPO-B35	.2 (0.4)	.6 (1.3)	.8 (1.8)	All models
Deluxe Luggage Compartment Trim RPO-B48	-.4 (-0.9)	2.8 (6.2)	2.4 (5.3)	Optional Sport Coupe & Z28 Base equipment on Berlinetta
Moldings-Body Side-Black RPO-B84	.2 (0.4)	.4 (0.9)	.6 (1.3)	All models
Moldings - Door Edge Guards - Black RPO-B93	.2 (0.4)	0 (0)	.2 (0.4)	All models

* Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
 Model Year 1984 Issued 7-83 Revised (*) 9-83

Optional Equipment Differential Mass (weight)*				
Equipment	MASS. kg. (weight, lb.)			Remarks
	Front	Rear	Total	
Roof-Removable Hatch	6.4	10.4	16.8	All models, includes storage
Panels-Glass RPO-CC1	(14.1)	(22.9)	(37.0)	bag and attaching hardware.
Windshield washer and	.2	0	.2	Optional Sport Coupe & Z28,
Wiper (Pulse System)	(0.4)	(0)	(0.4)	Base equipment on Berlinetta
RPO-CD4				
Rear Window Washer	- .8	4.0	3.2	All models
and wiper. RPO-C25	(-1.8)	(8.8)	(7.0)	
Defogger-Rear Window	0	.6	.6	All models
(Electric) RPO-C49	(0)	(1.3)	(1.3)	
Air Conditioning	23.6	1.8	25.4	With RPO-LQ9 & LC1 engines.
(Manual Control) RPO-C60	(52.0)	(4.0)	(56.0)	Sport Coupe
	23.4	1.8	25.2	With RPO-LG4 & L69 engines.
	(51.6)	(4.0)	(55.6)	Sport Coupe, Z28
Air Conditioning	23.6	1.8	25.4	Optional Berlinetta only.
(Electronic Control)	(52.0)	(4.0)	(56.0)	
RPO-C67				
Sport Mirrors - Electric	1.6	.4	2.0	All models
Remote Control-R.H.&L.H.	(3.5)	(0.9)	(4.4)	
-Controls on L.H. Door				
Panel. RPO-DG7				
Roof Console	2.0	.6	2.6	Optional Sport Coupe & Z28,
(Requires RPO-B18 or B51.	(4.4)	(1.3)	(5.7)	Base equipment on Berlinetta.
RPO-DK6				
Mirrors-Outside R/V	1.4	.4	1.8	Optional Sport Coupe
Sport (L.H. Remote,	(3.1)	(0.9)	(4.0)	Base equipment on Berlinetta & Z28
R.H. Manual.) RPO-D35				
Rear Compartment	- .4	3.0	2.6	All models
Cargo Area Cover	(-0.9)	(6.6)	(5.7)	
RPO-D42				
Spoiler-Rear Deck Lid	- .6	2.6	2.0	Optional Sport Coupe & Berlinetta
(3-piece) RPO-D80	(-1.3)	(5.7)	(4.4)	Base on Z28

* Also see Engine - General Section for dressed engine mass (weight).

Passenger Car

METRIC (U.S. Customary)

Model Year 1984 Issued 7-83 Revised (*) 9-83

		Optional Equipment Differential Mass (weight)*		
Equipment	MASS, kg. (weight, lb.)			Remarks
	Front	Rear	Total	
Sport Suspension (Includes-Larger Diameter Front Stabilizer Bar, Added Rear Stabilizer Bar, Special Front & Rear Shock Absorbers, Specific Steering Gear.) RPO-F41	5.0 (11.0)	5.4 (11.9)	10.4 (22.9)	Optional Sport Coupe
Power 4-Wheel Disc Brakes. (Requires V8 Engine) RPO-J65	0 (0)	7.0 (15.4)	7.0 (15.4)	All models
Cruise Control-Three Mode with Resume Feature. (Available on Manual or Automatic Transmissions.) RPO-K34	2.8 (6.2)	0 (0)	2.8 (6.2)	All models
2.8 Liter V6 (173 CID) RPO-LC1	20.6 (45.4)	9.4 (20.7)	30.0 (66.1)	Optional Sport Coupe Base equipment on Berlinetta
5.0 Liter V8 (305 CID) RPO-LG4	91.2 (201.0)	20.4 (45.0)	111.6 (246.0)	Optional Sport Coupe & base for Z28
	85.8 (189.1)	-2.8 (-6.2)	83.0 (182.9)	Optional Berlinetta
5.0 Liter V8 (305 CID) High Output Engine RPO-L69	95.4 (210.3)	20.8 (45.8)	116.2 (256.1)	Optional Z28 only
5-Speed Manual Transmission RPO-MM5	-5.8 (-12.8)	-4.8 (-10.6)	-10.6 (-23.4)	With LQ9 engine
	-7.2 (-15.9)	-5.6 (12.3)	-12.8 (28.2)	With LC1 engine
	-5.8 (-12.8)	-4.8 (-10.6)	-10.6 (-23.4)	With LG4 & L69 engines

* Also see Engine -- General Section for dressed engine mass (weight).

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) 9-83

[illegible]

* Also see Engine – General Section for dressed engine mass (weight).

METRIC (U.S. Customary)

Revised (■)

271

* Also see Engine – General Section for dressed engine mass (weight)

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*) 9-83

[illegible]

* Also see Engine – General Section for dressed engine mass (weight).

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CAMARO
Model Year 1984 Issued 7-83 Revised (*)


[illegible]

* Also see Engine — General Section for dressed engine mass (weight).


METRIC (U.S. Customary)

Exterior Car And Body Dimensions – Key Sheet


Exterior Width

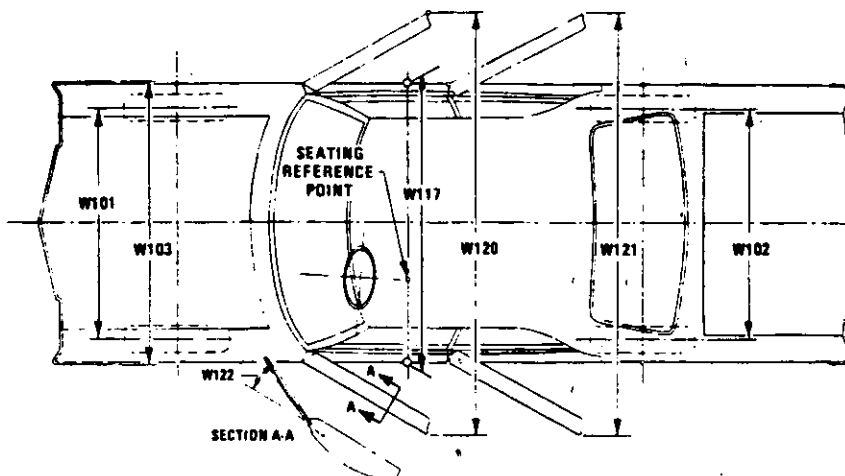




Exterior Length & Height

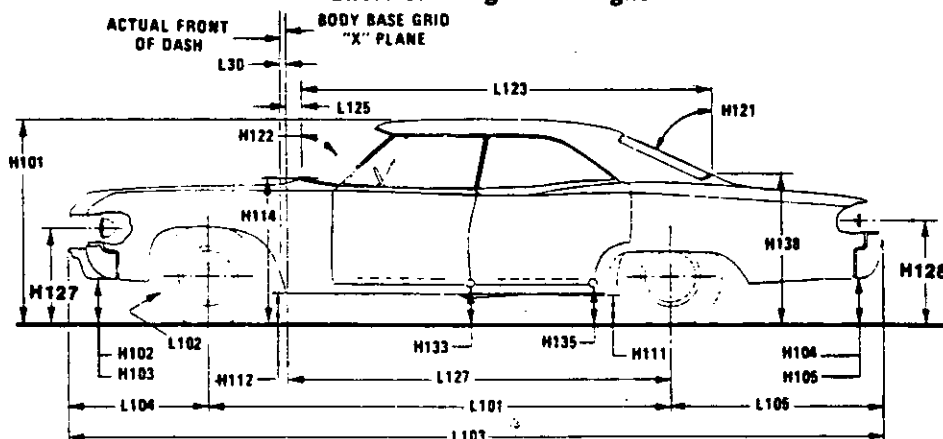

Exterior Ground Clearance

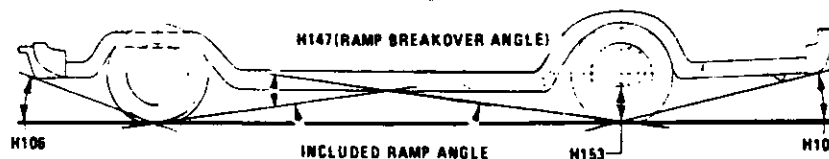

Cargo Space

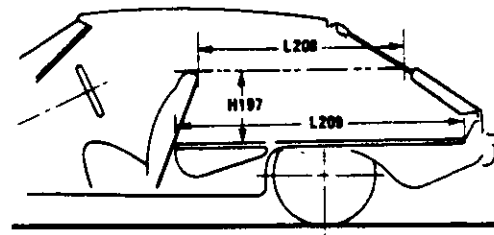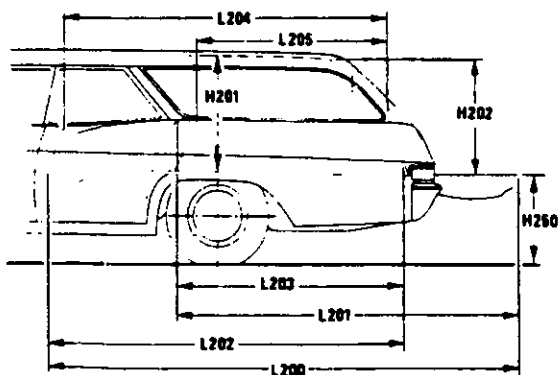

Hatchback

Station Wagon


MVMA Specifications Form

Passenger Car


METRIC (U.S. Customary)

Interior Car And Body Dimensions – Key Sheet


Front Compartment

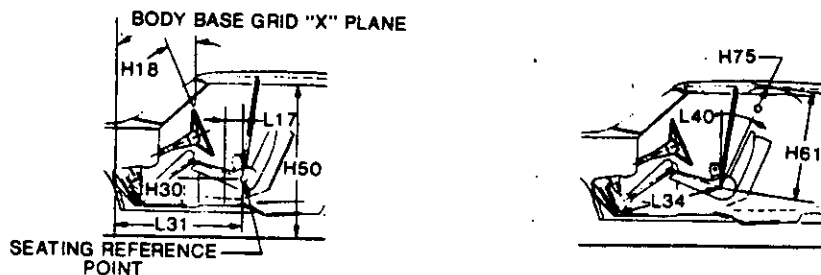


Rear Compartment

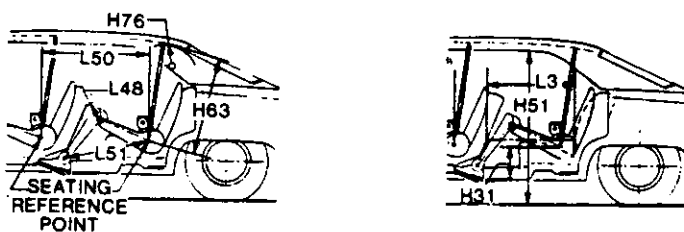

Third Seat

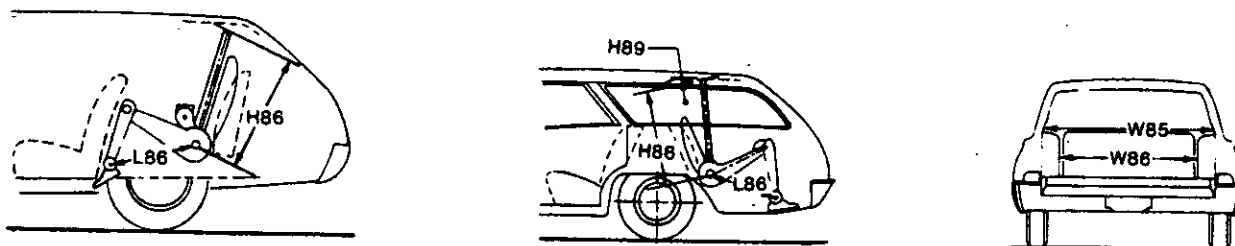

Interior Width

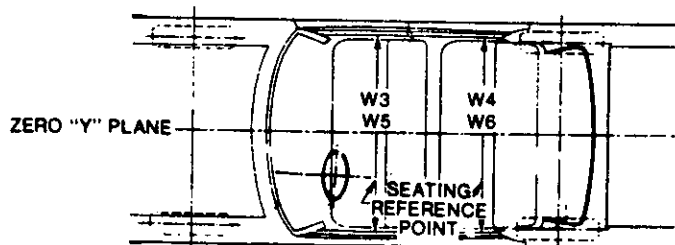

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Exterior Car And Body Dimensions — Key Sheet

Dimensions Definitions

Seating Reference Point

SEATING REFERENCE POINT means the manufacturer's design reference point which —

- (a) Establishes the rearmost normal design driving or riding position of each designated seating position in a vehicle;
- (b) Has coordinates established relative to the design vehicle structure;
- (c) Simulates the position of the pivot center of the human torso and thigh; and
- (d) Is the reference point employed to position the two dimensional templates described in SAE Recommended Practice J826, "Manikins for Use in Defining Vehicle Seating Accommodations," November 1962.

Width Dimensions

- W101 TREAD—FRONT. The dimension measured between the tire centerlines at the ground.
- W102 TREAD—REAR. The dimension measured between the tire centerlines at the ground. In case of dual wheels, the dimension will be measured to the centerline of tire and wheel assemblies.
- W103 VEHICLE WIDTH. The maximum dimension measured between the widest point on the vehicle, excluding exterior mirrors, flexible mud flaps, marker lamps, but including bumpers, moldings, sheet metal protrusions or dual wheels, if standard equipment.
- W117 BODY WIDTH AT SgRP—FRONT. The dimension measured laterally between the widest points on the body at the SgRP-front, excluding door handles, applied moldings, or appliques.
- W120 VEHICLE WIDTH—FRONT DOORS OPEN. The dimension measured between the widest point on the front doors in maximum hold-open position.
- W121 VEHICLE WIDTH—REAR DOORS OPEN. The dimension measured between the widest point on the rear doors in maximum hold-open position. For vehicles with a rear door on only one side, this dimension is to the zero "Y" plane.
- W122 TUMBLE HOME. STRAIGHT SIDE GLASS. The angle measured from a vertical to the outside surface of the front door glass at the SgRP "X" plane.
CURVED SIDE GLASS. The angle measured from a vertical to a chord extending from the upper DLO to the lower DLO at the outside surface of the front door glass at the front SgRP "X" plane.

Length Dimensions

- L30 FRONT OF DASH "X" COORDINATE. A minus (-) dimension indicates actual front of dash in forward of the zero "X" plane.
- L101 WHEELBASE (WB). The dimension measured longitudinally between front and rear wheel centerlines. In case of dual rear axles, the dimension shall be to the midpoint of the centerlines of the rear wheels.
- L102 TIRE SIZE. As specified by the manufacturer.
- L103 VEHICLE LENGTH. The maximum dimension measured longitudinally between the foremost point and the rearmost point on the vehicle, including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L104 OVERHANG—FRONT. The dimension measured longitudinally from the centerline of the front wheels to the foremost point on the vehicle including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.

- L105 OVERHANG—REAR. The dimension measured longitudinally from the centerline of the rear wheels; or in the case of dual rear axles, the dimension shall be the midpoint of the centerlines of the rear wheels, to the rearmost point on the vehicle, including rear bumpers, bumper guards, tow hooks and rub strips, if standard equipment.
- L123 UPPER STRUCTURE LENGTH. The dimension measured longitudinally from the cowl point to the deck point.
- L127 REAR WHEEL CENTERLINE "X" COORDINATE or in the case of dual rear axles, the coordinate shall be in the midpoint of the distance between the rear axle centerlines.
- L125 COWL POINT "X" COORDINATE.

Height Dimensions

- H101 VEHICLE HEIGHT. The dimension measured vertically from the highest point on the vehicle body to ground.
- H114 COWL POINT TO GROUND. Measured at zero "Y" plane.
- H138 DECK POINT TO GROUND. Measured at zero "Y" plane.
- H112 ROCKER PANEL—FRONT TO GROUND. The dimension measured vertically from the foremost point on the bottom of the rocker panels, excluding flanges, to ground.
- H132 BOTTOM OF DOOR OPEN—FRONT TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum hold-open position, to ground.
- H111 ROCKER PANEL—REAR TO GROUND. The dimension measured vertically from the bottom of the rocker or side quarter panel at the front of the rear wheel opening, excluding flanges, to ground.
- H134 BOTTOM OF DOOR OPEN—REAR TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum hold-open position, to ground.
- H135 BOTTOM OF DOOR CLOSED—REAR TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum closed position, to ground.
- H121 BACKLIGHT SLOPE ANGLE. The angle between the vertical reference line and the surface of backlight at vehicle zero "Y" plane. For curve backlight, the angle is to chord of backlight arc from lower DLO to upper DLO.
- H122 WINDSHIELD SLOPE ANGLE. The angle between the vertical reference line and a chord of the windshield are running from the lower DLO to the upper DLO at the vehicle zero "Y" plane. In the case of wrap over glass, the angle to be measured will be formed by a chord 457 mm (18.0 in.) long drawn from the lower DLO to the intersecting point on the windshield.
- H127 HEADLAMP TO GROUND—CURB MASS (WT.) The dimensional measured vertically from the centerline of the lowest headlamp lens to ground.
- H128 TAILLAMP TO GROUND—CURB MASS (WT.) The dimension measured vertically from the centerline of the upper bulb to ground.

Ground Clearance Dimensions

- H102 FRONT BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the front bumper to ground, including bumper guards, if standard equipment.

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Interior Car And Body Dimensions — Key Sheet

Dimensions Definitions

- H103 FRONT BUMPER TO GROUND CURB MASS (WT.). Measured in the same manner as H104.
- H104 REAR BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the rear bumper to ground, including bumper guards, if standard equipment.
- H105 REAR BUMPER TO GROUND—CURB MASS (WT.). Measured in the same manner as H104.
- H106 ANGLE OF APPROACH. The angle measured between a line tangent to the front tire static loaded radius are the initial point of structural interference forward of the front tire to ground. The limiting structural component shall be designated.
- H107 ANGLE OF DEPARTURE. The angle measured between a line tangent to the rear tire static loaded radius are the initial point of structural interference rearward of the rear tire to ground. The limiting component shall be designated.
- H147 REAR BREAKOVER ANGLE. The angle measured between two lines tangent to the front and rear tire static loaded radius and intersecting at a point on the underside of the vehicle which defines the largest ramp over which the vehicle can roll.
- H153 REAR AXLE DIFFERENTIAL TO GROUND. The minimum dimension measured from the rear axle differential to ground.
- H156 MINIMUM RUNNING GROUND CLEARANCE. The minimum dimension measured from the sprung vehicle to ground. Specify location.

Front Compartment Dimensions

- PD1 PASSENGER DISTRIBUTION—FRONT.
- L31 SgRP—FRONT "X" COORDINATED.
- H61 EFFECTIVE HEAD ROOM—FRONT. The dimension measured along a line 8 deg. rear of vertical from the SgRP—front to the headlining plus 102 mm (4.0 in.).
- H75 EFFECTIVE T-POINT HEAD ROOM—FRONT. The minimum radius from the T-point to the headlining plus 762 mm (30 in.).
- L34 MAXIMUM EFFECTIVE LEG ROOM—ACCELERATOR. The dimension measured along a line from the ankle pivot center to the SgRP—front plus 254 mm (10.0 in.) measured with right foot on the undepressed accelerator pedal. For vehicles with SgRP to heel (H30) greater than 18 in., the accelerator pedal may be depressed as specified by the manufacturer. If the accelerator is depressed, the manufacturer shall place foot flat on pedal and note the depression of the pedal.
- H30 SgRP—FRONT TO HEEL. The dimension measured vertically from the SgRP—front to the accelerator heel point.
- L17 DESIGN H-POINT—FRONT TRAVEL. The dimension measured horizontally between the design H-point—front in the foremost and rearmost seat trace positions.
- W3 SHOULDER ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP—front within the belt line and 254 mm (10.0 in.) above the SgRP—front.
- W5 HIP ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP—front within 25 mm (1.0 in.) below and 76 mm (3.0 in.) above the SgRP—front and 76 mm (3.0 in.) fore and aft the SgRP—front.
- H150 UPPER BODY OPENING TO GROUND—FRONT. The dimension measured vertically from the trimmed body opening to the ground on the SgRP—front "X" plane.

- H18 STEERING WHEEL ANGLE. The angle measured from a vertical to the surface plane of the steering wheel.
- L40 BACK ANGLE—FRONT. The angle measured between a vertical line through the SgRP—front and the torso line. If the seatback is adjustable, use the normal driving and riding position specified by the manufacturer.

Rear Compartment Dimensions

- PD2 PASSENGER DISTRIBUTION—SECOND.
- L50 SgRP COUPLE DISTANCE. The dimension measured horizontally from the driver SgRP—front to the SgRP—second.
- H63 EFFECTIVE HEAD ROOM—SECOND. The dimension measured along a line 8 deg. rear of vertical from the SgRP to the headlining, plus 102 mm (4.0 in.).
- H76 EFFECTIVE T-POINT HEAD ROOM—SECOND. Measured in the same manner as H75.
- L51 MINIMUM EFFECTIVE LEG ROOM—SECOND. The dimension measured along a line from the ankle pivot center to the SgRP—second plus 254 mm (10.0 in.).
- H31 SgRP—SECOND TO HEEL. The dimension measured vertically from the SgRP—second to the two dimensional device heel point on the depressed floor covering.
- L48 KNEE CLEARANCE—SECOND. The minimum dimension measured from the knee pivot to the back of front seatback minus 51 mm (2.0 in.).
- L3 COMPARTMENT ROOM—SECOND. The dimension measured horizontally from the back of front seat to the front of the second seatback at a height tangent to the top of the second seat cushion.
- W4 SHOULDER ROOM—SECOND. The minimum dimension measured laterally between trimmed surfaces on the "X" plane through the SgRP—second within 254-406 mm (10.0-16.0 in.) above the SgRP—second.
- W6 HIP ROOM—SECOND. Measured in the same manner as W5.
- H51 UPPER BODY OPENING TO GROUND—SECOND. The dimension measured vertically from the trimmed body opening to the ground on the "X" plane 330 mm (13.0 in.) forward of the SgRP—second.

Luggage Compartment Dimensions

- V1 USABLE LUGGAGE CAPACITY.—Total of volumes of individual pieces of standard luggage set plus H-boxes stowed in the luggage compartment in accordance with the procedure described in paragraph 8.2 of SAE-J1100a.
- H195 LIFTOVER HEIGHT. The dimension measured vertically from the luggage compartment lower opening at the zero "Y" plane to ground.

Station Wagon — Third Seat Dimensions

- PD3 PASSENGER DIRECTION—THIRD.
- W85 SHOULDER ROOM—THIRD. Measured in the same manner as W5.
- W86 HIP ROOM—THIRD. Measured in the same manner as W5.
- L86 EFFECTIVE LEG ROOM—THIRD. The dimension measured along a line from the ankle pivot center to the SgRP—third plus 254 mm (10.0 in.).
- H86 EFFECTIVE HEAD ROOM—THIRD. The dimension, measured along a line 8 deg. from the SgRP—third to the headlining rear of vertical plus a constant of 102 mm (4.0 in.).
- H89 EFFECTIVE T-POINT HEAD ROOM—THIRD. Measured in the same manner as H75.

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Interior Car And Body Dimensions - Key Sheet

Dimensions Definitions

Station Wagon - Cargo Space Dimensions

- L200 CARGO LENGTH-OPEN-FRONT.** The minimum dimension measured longitudinally from the back of the front seatback at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the open tailgate or cargo surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.
- L201 CARGO LENGTH-OPEN-SECOND.** The dimension measured longitudinally from the back of the second seatback at the height of the undepressed floor covering on the open tailgate or cargo floor surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.
- L202 CARGO LENGTH-CLOSED-FRONT.** The minimum dimension measured horizontally from the back of the front seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L203 CARGO LENGTH-CLOSED-SECOND.** The dimension measured horizontally from the back of the second seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L204 CARGO LENGTH AT BELT-FRONT.** The minimum dimension measured horizontally from the back of the front seatback at the seatback top to the foremost normal surface of the closed tailgate or inside surface of the cab back panel at the height of the belt, on the zero "Y" plane.
- L205 CARGO LENGTH AT BELT-SECOND.** The minimum dimension measured horizontally from the back of the second seatback at the seatback top to the foremost normal surface of the closed tailgate at the height of the belt, on the zero "Y" plane.
- W201 CARGO WIDTH-WHEELHOUSE.** The minimum dimension measured laterally between the trimmed wheelhousings at floor level. For any vehicle not trimmed, measure the sheet metal.
- W203 REAR OPENING WIDTH AT FLOOR.** The minimum dimension measured laterally between the limiting interferences of the rear opening at floor level.
- W204 REAR OPENING WIDTH AT BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening at belt height or top of pick up box.
- W205 REAR OPENING WIDTH ABOVE BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening above the belt height.

- H201 CARGO HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the headlining at the rear wheel "X" coordinated on the zero "Y" plane.
- H202 REAR OPENING HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the upper trimmed opening on the zero "Y" plane with rear door fully open.
- H250 TAILGATE TO GROUND (CURB MASS WT.)** The dimension measured vertically from the top of the undepressed floor covering on the lowered tailgate to ground on the zero "Y" plane.
- V2 STATION WAGON**
Measured in inches:

$$\frac{W4 \times H201 \times L204}{1728} = \text{ft.}^3$$
 Measured in mm:

$$\frac{W4 \times H201 \times L204}{10^9} = \text{m}^3(\text{cubic meter})$$
- V4 HIDDEN CARGO VOLUME.** As specified by the manufacturer.

Hatchback - Cargo Space Dimensions

All hatchback cargo dimensions are to be taken with the front seat in full down and rear position, and the rear seat folded down. The hatchback door is in the closed position (For electrically adjusted seats, see the manufacturer's specifications for Design "H" Point).

- H197 FRONT SEATBACK TO LOAD HEIGHT.** The dimension measured vertically from the horizontal tangent to the top of the seatback to the undepressed floor covering.
- L208 CARGO LENGTH AT FRONT SEATBACK HEIGHT.** The minimum horizontal dimension from the "X" plane tangent to the rearmost surface of the driver's seatback to the inside limiting interference of the hatchback door on the vehicle zero "Y" plane.
- L209 CARGO LENGTH AT FLOOR-FRONT-HATCHBACK.** The minimum horizontal dimension measured at floor level from the rear of the front seatback to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.
- V3 HATCHBACK**
Measured in inches:

$$\frac{\frac{L208 + L209}{2} \times W4 \times H197}{1728} = \text{ft.}^3$$
 Measured in mm:

$$\frac{\frac{L208 + L209}{2} \times W4 \times H197}{10^9} = \text{m}^3(\text{cubic meter})$$

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Index

Subject	Page No.
Aerodynamics.....	22
Alternator.....	16
Automatic Transmission.....	9
Axis, Steering.....	14
Axle, Rear.....	10
Axle Shafts.....	10
Battery.....	16
Brakes — Parking, Service.....	12, 13
Camber.....	15
Camshaft.....	3
Capacities.....	
Cooling System.....	5
Fuel Tank.....	6
Lubricants.....	
Engine Crankcase.....	3
Transmission.....	9
Rear Axle.....	10
Car Models.....	1
Car and Body Dimensions.....	
Width.....	20
Length.....	20
Height.....	20
Ground Clearance.....	20
Front Compartment.....	21
Rear Compartment.....	21
Luggage Compartment.....	21
Station Wagon — Third Seat.....	22
Station Wagon — Cargo Space.....	22
Hatchback — Cargo Space.....	22
Carburetor.....	2, 6
Caster.....	15
Choke, Automatic.....	6
Clutch — Pedal Operated.....	8
Coil, Ignition.....	16
Connecting Rods.....	4
Convenience Equipment.....	19
Cooling System.....	5
Crankshaft.....	4
Cylinders and Cylinder Head.....	3
Diesel Information.....	4
Dimension Definitions.....	
Key Sheet — Exterior.....	27, 29
Key Sheet — Interior.....	28, 30, 31
Electrical System.....	15, 16
Emission Controls.....	7
Engine.....	
Bore, Stroke, Type.....	3
Compression Ratio.....	2
Displacement.....	2, 3
Firing Order, Cylinder Numbering.....	3
General Information, Power & Torque.....	2
Identification Number Location.....	17
Power Teams.....	2
Exhaust System.....	7
Equipment Availability, Convenience.....	19
Fan, Cooling.....	5
Fiducial Marks.....	23
Filters — Engine Oil, Fuel System.....	4
Feature Highlights.....	20
Frame.....	17
Front Suspension.....	11
Front Wheel Drive Unit.....	10
Fuel System.....	6
Fuel Injection.....	8
Fuel Tank.....	6
Generator and Regulator.....	16
Glass.....	17
Headroom — Body.....	21, 22
Heights — Car and Body.....	20
Horns.....	15
Horsepower — Brake.....	2
Ignition System.....	16
Inflation — Tires.....	13
Instruments.....	15

Subject	Page No.
Kingpin (Steering Axis).....	14
Lamps and Headlamp Shape.....	24
Legroom.....	21, 22
Lengths — Car and Body.....	20
Leveling, Suspension.....	11
Lifters, Valve.....	4
Linings — Clutch, Brake.....	8, 12
Lubrication.....	8, 9
Luggage Compartment.....	21
Mass.....	25, 26
Models.....	1
Motor Starting.....	16
Muffler.....	4
Passenger Capacity.....	1
Passenger Mass Distribution.....	25
Pistons.....	3
Power Brakes.....	12
Power, Engine.....	2
Power Steering.....	14
Power Teams.....	2
Propeller Shaft, Universal Joints.....	10
Pumps — Fuel.....	6
Water.....	5
Radiator — Cap, Hoses.....	5
Ratios — Axle.....	2, 9
Compression.....	2
Steering.....	14
Transmission.....	2, 8, 9
Rear Axle.....	2, 9, 10
Regulator — Generator.....	16
Restraint System.....	18
Rims.....	13
Rods — Connecting.....	4
Seats.....	17
Shock Absorbers, Front & Rear.....	11
Spark Plugs.....	16
Speedometer.....	15
Springs — Front & Rear Suspension.....	11
Stabilizer (Sway Bar) — Front & Rear.....	11
Starting System.....	16
Steering.....	14
Suppression — Ignition, Radio.....	16
Suspension — Front & Rear.....	11
Tail Pipe.....	4
Theft Protection.....	19
Thermostat, Cooling.....	5
Tires.....	13
Toe-In.....	15
Torque Converter.....	10
Torque — Engine.....	2
Transaxle.....	9
Transmission — Types.....	2, 8, 9
Transmission — Automatic.....	2, 8, 9
Transmission — Manual.....	2, 8, 9
Transmission — Ratios.....	2, 9
Tread.....	20
Trunk Cargo Load.....	1
Trunk Luggage Capacity.....	21
Turning Diameter.....	14
Utilized Construction.....	17
Universal Joints, Propeller Shaft.....	10
Valve System.....	4
Vehicle Identification Number.....	17
Voltage Regulator.....	16
Water Pump.....	5
Weights.....	25, 26
Wheel Alignment.....	15
Wheelbase.....	20
Wheels & Tires.....	13
Wheel Spindle.....	14
Widths — Car and Body.....	20
Windshield.....	17
Windshield Wiper and Washer.....	15