

# MOTOR VEHICLE

## Specifications

METRIC (U.S. Customary)

Passenger Car

# 1985

|   |                 |         |
|---|-----------------|---------|
| Manufacturer                              | Car Line        |         |
| FORD MOTOR COMPANY                        | ESCORT          |         |
| Mailing Address                           | Issued          | Revised |
| P.O. BOX 2053<br>DEARBORN, MICHIGAN 48121 | SEPTEMBER, 1984 |         |

Questions concerning these specifications should be directed to the manufacturer whose address is shown above.

The information contained herein is prepared, distributed by, and is solely the responsibility of the automobile manufacturing company to whose products it relates. This specification form was developed by the automobile manufacturing companies under the auspices of the Motor Vehicle Manufacturers Association of the United States, Inc.

The General Specifications herein are those in effect at date of compilation and are subject to change without notice by the manufacturer.

# **MVMA Specifications Form**

## **Passenger Car**

**METRIC (U.S. Customary)**

### **Table of Contents**

---

|       |   |
|-------|---|
| 1     | Car Models                                    |
| 2     | Power Teams                                   |
| 3-6   | Engine  |
| 4     | Lubrication System                            |
| 4     | Diesel Information                            |
| 5     | Cooling System                                |
| 6     | Fuel System                                   |
| 7     | Vehicle Emission Control                      |
| 7     | Exhaust System                                |
| 8-10  | Transmission, Axles and Shafts                |
| 11    | Suspension-Front and Rear                     |
| 12-13 | Brakes  |
| 13    | Tires and Wheels                              |
| 14-15 | Steering                                      |
| 15-16 | Electrical                                    |
| 17    | Body – Miscellaneous Information              |
| 17    | Glass   |
| 17    | Frame   |
| 18    | Restraint System                              |
| 19    | Convenience Equipment                         |
| 20-22 | Car and Body Dimensions                       |
| 23    | Vehicle Fiducial Marks                        |
| 24    | Lamps and Headlamps                           |
| 25    | Vehicle Mass (Weight)                         |
| 26    | Optional Equipment Differential Mass (Weight) |
| 27-31 | Car and Body Dimension Key Sheets             |
| 32    | Index   |

---

#### **NOTE:**

1. This form uses both SI metric units and U.S. Customary units. The metric unit of measure is presented first, and the U.S. Customary unit follows in parentheses.
2. **UNLESS OTHERWISE INDICATED:**
  - a. Specifications apply to standard models without optional equipment. Significant deviations are noted.
  - b. Nominal design dimensions are used throughout these specifications.
  - c. All linear dimensions are in millimeters (inches), and all mass (weight) specifications are in kilograms (pounds).
3. The General Specifications herein are those in effect at date of completion and are subject to change without notice by the manufacturer.
4. Additional Car and Body Dimensions and/or drawings (based in part on SAE J1100a "Motor Vehicle Dimensions") may be available from the manufacturer.

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

## Car Models

| Model Description<br>FWD/RWD | Introduction Date | Make, Car Line, Series, Body Type<br>(Mfr's Model Code) | No. of Designated Seating Positions<br>(Front/Rear) | Max. Trunk/Cargo Load—Kilograms<br>(Pounds) |
|------------------------------|-------------------|---|---|---|
| % <u>ESCORT BASE</u>         |                   |   |   |   |
| 2-Door Hatchback             |                   | 61D   | 2/2   | 22.68 (50)                                  |
| 4-Door Hatchback             |                   | 58D   | 2/2   | 22.68 (50)                                  |
| % <u>ESCORT L</u>            |                   |   |   |   |
| 2-Door Hatchback             |                   | 61D   | 2/2   | 22.68 (50)                                  |
| 4-Door Hatchback             |                   | 58D   | 2/2   | 22.68 (50)                                  |
| 4-Door Wagon                 |                   | 74D   | 2/2   | 68.04 (150)                                 |
| % <u>ESCORT GL</u>           |                   |   |   |   |
| 2-Door Hatchback             |                   | 61D/CVB   | 2/2   | 22.68 (50)                                  |
| 4-Door Hatchback             |                   | 58D/CVB   | 2/2   | 22.68 (50)                                  |
| 4-Door Wagon                 |                   | 74D/CVB   | 2/2   | 68.04 (150)                                 |
| % <u>ESCORT LX</u>           |                   |   |   |   |
| 4-Door Hatchback             |                   | 58D/BYB   | 2/2   | 22.68 (50)                                  |
| 4-Door Wagon                 |                   | 74D/BYB   | 2/2   | 68.04 (150)                                 |
| % <u>ESCORT GT</u>           |                   |   |   |   |
| 2-Door Hatchback             |                   | 61D/B9B   | 2/2   | 22.68 (50)                                  |
| % Front Wheel Drive (FWD)    |                   |   |   |   |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT

Model Year 1985

Issued 9/84

Revised (●)

## Power Teams (Indicate whether standard or optional)

SAE J1349 Net bhp (brake horsepower) and net torque corrected to 77°F/25° C and 29.61 in. Hg/100 kPa atmospheric pressure.

| SERIES<br>AVAILABILITY | ENGINE   |                                 |                 |                     |                              | E<br>x<br>h<br>a<br>u<br>s<br>t<br>S/D | TRANSMISSION<br>TRANSAXLE | (TRANSFER RATIO)<br>AXLE RATIO<br>(std. first) |
|------------------------|--|---------------------------------|-----------------|---------------------|------------------------------|--|---------------------------|--|
|                        | Displ.<br>Liters<br>(in³)                          | Carb.<br>(Barrels,<br>FI, etc.) | Compr.<br>Ratio | SAE Net at RPM      |                              |  |                           |  |
|                        |  |                                 |                 | kW<br>(bhp)         | Torque<br>N - m<br>(lb. ft.) |  |                           |  |
| A11                    | 1.6<br>(97.6)                                      | 2V                              | 9.0             | 52<br>(70)<br>4600  | 119<br>(88)<br>2600          | S                                      | MTX I - WR                | 3.59   |
| 50 STATES/CANADA       |  |                                 |                 |                     |                              |  |                           |  |
| A11                    | 1.6 HO<br>(97.6)                                   | 2V                              | 9.0             | 60<br>(80)<br>5400  | 119<br>(88)<br>3000          | S                                      | MTX III<br>ATX            | 3.73/2.73 *<br>3.31                            |
| A11                    | 1.6<br>(97.6)                                      | EFI                             | 9.0             | 63<br>(84)<br>5200  | 122<br>(90)<br>2800          | S                                      | MTX III<br>ATX            | 3.73/2.73 *<br>3.31                            |
| A11                    | 1.6 TC<br>(97.6)                                   | EFI                             | 8.0             | 90<br>(120)<br>5200 | 163<br>(120)<br>3400         | S                                      | MTX III                   | 3.73/2.73 *                                    |
| A11                    | 2.0<br>(121)                                       | Diesel                          | 22.7            | 39<br>(52)<br>4000  | 111<br>(82)<br>2400          | S                                      | MTX III                   | 3.52/2.61 *                                    |
| 49 STATES/CANADA # @   |  |                                 |                 |                     |                              |  |                           |  |
| HATCHBACK              | 1.6 FS<br>(97.6)                                   | 2V                              | 9.0             | 52<br>(70)<br>4600  | 119<br>(88)<br>2600          | S                                      | MTX I                     | 3.04   |
| 3-DR (61D)             | 2.0 FS<br>(121)                                    | Diesel                          | 22.7            | 39<br>(52)<br>3700  | 108<br>(80)<br>2750          | S                                      | MTX III                   | 3.52/2.61 *                                    |
| MTX I                  | Manual 4-Speed                                     |                                 |                 |                     |                              |  |                           |  |
| MTX III                | Manual 5-Speed                                     |                                 |                 |                     |                              |  |                           |  |
| ATX                    | Automatic 3-Speed                                  |                                 |                 |                     |                              |  |                           |  |
| FS                     | Fuel Saver   |                                 |                 |                     |                              |  |                           |  |
| WR                     | Wide Ratio   |                                 |                 |                     |                              |  |                           |  |
| #                      | Excludes California                                |                                 |                 |                     |                              |  |                           |  |
| *                      | Refer to Footnote (a) Page 9                       |                                 |                 |                     |                              |  |                           |  |
| @                      | Fuel Saver 2.0L Diesel Also Available for Altitude |                                 |                 |                     |                              |  |                           |  |
| TC                     | Turbo Charged                                      |                                 |                 |                     |                              |  |                           |  |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

|                       |            |                   |
|-----------------------|------------|-------------------|
| 1.6L/2V<br>(97.6 CID) | 1.6L HO/2V | 1.6L/EFI & TC/EFI |
|-----------------------|------------|-------------------|

## ENGINE - GENERAL

|   |         |  |               |                               |
|---|---------|--|---------------|-------------------------------|
| Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sohc, dohc, ohv, hemi, wedge, pre-camber, etc.) |         | Inline, Front, Transverse, (SOHC) Single Overhead Camshaft, (CVH) Compound Valve Hemispherical Combustion Chambers |               |                               |
| No. of cylinders  |         | Four   |               |                               |
| Bore  |         | 80.0 (3.15)  |               |                               |
| Stroke  |         | 79.5 (3.13)  |               |                               |
| Bore spacing (c / l to c / l)   |         | 91.8 (3.61)  |               |                               |
| Cylinder block material   |         | Cast Iron  |               |                               |
| Cylinder block deck height  |         | 208.6 (8.21)   |               |                               |
| Deck clearance (minimum) (above or below block)   |         | 3.5 (0.14) Above   |               | 5.5 (0.22) Above              |
| Cylinder head material  |         | Aluminum   |               |                               |
| Cylinder head volume (cm³)  |         | 58.5   |               |                               |
| Head gasket thickness (compressed)  |         | 1.3 (0.05)   |               |                               |
| Minimum combustion chamber total volume (cm³)   |         | 52.1 (Nominal)   |               |                               |
| Cyl. no. system (front to rear)*  | L. Bank | 1, 2, 3, 4   |               |                               |
|   | R. Bank | N.A.   |               |                               |
| Firing order  |         | 1, 3, 4, 2   |               |                               |
| Recommended fuel (leaded, unleaded, diesel)   |         | Unleaded   |               |                               |
| Fuel antiknock index $\frac{(R + M)}{2}$  |         | 87 Minimum Octane  |               |                               |
| Total dressed engine mass (wt) dry**  |         | 128.9 (284.3)  | 129.5 (285.6) | 129.1 (284.6) & 143.1 (315.6) |

## Engine - Pistons

|  |                |                 |
|--|----------------|-----------------|
| Material & mass, g (weight, oz.) - piston only | Aluminum Alloy | Forged Aluminum |
|--|----------------|-----------------|

## Engine - Camshaft

|                                   |                      |                        |  |
|-----------------------------------|----------------------|------------------------|--|
| Location                          | In Cylinder Head     |                        |  |
| Material & mass kg (weight, lbs.) | Hardenable Cast Iron |                        |  |
| Drive type                        | Chain / belt         | Belt                   |  |
|                                   | Width / pitch        | 25.4 (1.0) / 9.5 (0.4) |  |

\* Rear of engine - drive takeoff. View from drive takeoff end to determine left & right side of engine.

\*\* Dressed engine mass (weight) includes the following: All Engine Mounted Components Including Front End Dress. Excludes Starter and Alternator.

# MVMA Specifications Form Passenger Car

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

**METRIC (U.S. Customary)**

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## ENGINE - GENERAL

|   |   |            |
|---|---|------------|
| Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sohc, dohc, ohv, hemi, wedge, pre-camber, etc.) | Inline, Front, Transverse, Pre-Chamber Diesel         |            |
| No. of cylinders  | Four  |            |
| Bore  | 86 (3.39)   |            |
| Stroke  | 86 (3.39)   |            |
| Bore spacing (c / l to c / l)   | 96-98-96 (3.78-3.86-3.78)                             |            |
| Cylinder block material   | Cast Iron   |            |
| Cylinder block deck height  | 241.5 (9.51) From Centerline of Crank to Top of Block |            |
| Deck clearance (minimum) (above or below block)   | 0.75 (.030) Above Block                               |            |
| Cylinder head material  | Aluminum  |            |
| Cylinder head volume (cm <sup>3</sup> )   |   |            |
| Head gasket thickness (compressed)  | 1.5 (.059)  |            |
| Minimum combustion chamber total volume (cm <sup>3</sup> )  | 23.02   |            |
| Cyl. no. system (front to rear)*  | L. Bank   | 1, 2, 3, 4 |
|   | R. Bank   | N.A.       |
| iring order   | 1, 3, 4, 2  |            |
| Recommended fuel (leaded, unleaded, diesel)   | Diesel  |            |
| Fuel antiknock index $\frac{(R + M)}{2}$  | Cetane, 40 or Greater                                 |            |
| Total dressed engine mass (wt) dry**  | 152.5 (336.3)   |            |

## Engine - Pistons

|  |                      |
|--|----------------------|
| Material & mass, g (weight, oz.) - piston only | Aluminum 0.59 (.027) |
|--|----------------------|

## Engine - Camshaft

|                                   |               |                         |
|-----------------------------------|---------------|-------------------------|
| Location                          |               | Overhead                |
| Material & mass kg (weight, lbs.) |               | Cast Iron 2.85 (6.27)   |
| Drive type                        | Chain / belt  | Belt                    |
|                                   | Width / pitch | 19.1 (0.75)/9.53 (.375) |

\* Rear of engine - drive takeoff. View from drive takeoff end to determine left & right side of engine.

\*\* Dressed engine mass (weight) includes the following: All Engine Mounted Components Including Front End Dress; Excludes Starter and Alternator

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6L HO/2V

1.6L/EFI

1.6L TC/EFI

## Engine – Valve System

|                                    |                            |
|------------------------------------|----------------------------|
| Hydraulic lifters (std., opt., NA) | Standard                   |
| Valves                             | Number intake / exhaust    |
|                                    | Head O.D. intake / exhaust |

4/4

42/37

## Engine – Connecting Rods

|                                       |              |
|---------------------------------------|--------------|
| Material & mass [kg., (weight, lbs.)] | Forged Steel |
|---------------------------------------|--------------|

## Engine – Crankshaft

|                                       |                   |
|---------------------------------------|-------------------|
| Material & mass [kg., (weight, lbs.)] | Nodular Cast Iron |
| End thrust taken by bearing (no.)     | #3                |
| Number of main bearings               | 5                 |

## Engine – Lubrication System

|  |                                 |
|--|---------------------------------|
| Normal oil pressure [kPa (psi) at engine rpm]  | 240-450 (35-65) @ 2000 Warm Oil |
| Type oil intake (floating, stationary)         | Stationary                      |
| Oil filter system (full flow, part, other)     | Full Flow                       |
| Capacity of c/case, less filter-refill-L (qt.) | 3.3 (3.50)                      |

## Engine – Diesel Information (NOT OFFERED)

|   |                              |
|---|------------------------------|
| Diesel engine manufacturer                                  |                              |
| Glow plug, current drain at 0°F                             |                              |
| Injector nozzle   | Type                         |
|   | Opening pressure [kPa (psi)] |
| Pre-chamber design  |                              |
| Fuel injection pump   | Manufacturer                 |
|   | Type                         |
| Fuel injection pump drive (belt, chain, gear)               |                              |
| Supplementary vacuum source (type)                          |                              |
| Fuel heater (yes/no)  |                              |
| Water separator, description (std., opt.)                   |                              |
| Turbo manufacturer  |                              |
| Oil cooler-type (oil to engine coolant; oil to ambient air) |                              |
| Oil filter  |                              |

## Engine – Intake System

|                              |      |                 |
|------------------------------|------|-----------------|
| Turbo charger - manufacturer | N.A. | Borg-Warner IHI |
| Super charger - manufacturer | N.A. |                 |
| Charge cooler                | N.A. |                 |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## Engine – Valve System

|                                    |                            |   |
|------------------------------------|----------------------------|---|
| Hydraulic lifters (std., opt., NA) |                            | N.A.  |
| Valves                             | Number intake / exhaust    | 4/4   |
|                                    | Head O.D. intake / exhaust | 41 + 0.1 (1.61 + .04)/36 + 0.1 (1.42 + .04) |

## Engine – Connecting Rods

|                                       |                          |
|---------------------------------------|--------------------------|
| Material & mass [kg., (weight, lbs.)] | Carbon Steel 0.88 (0.19) |
|---------------------------------------|--------------------------|

## Engine – Crankshaft

|                                       |                        |
|---------------------------------------|------------------------|
| Material & mass [kg., (weight, lbs.)] | Alloy Steel 15.9 (3.5) |
| End thrust taken by bearing (no.)     | #3                     |
| Number of main bearings               | Five                   |

## Engine – Lubrication System

|  |   |
|--|---|
| Normal oil pressure [kPa (psi) at engine rpm]  | Greater Than 0.7 Kg/CM <sup>2</sup> @ 700 R.P.M. Oil Temp. 80°C |
| Type oil intake (floating, stationary)         | Stationary  |
| Oil filter system (full flow, part, other)     | Full Flow Main, 10% Bypass                                      |
| Capacity of c/case, less filter-refill-L (qt.) | 5.0 (5.28)  |

## Engine – Diesel Information

|   |                              |  |
|---|------------------------------|--|
| Diesel engine manufacturer                                  |                              | Mazda  |
| Glow plug, current drain at 0°F                             |                              | 16.5 Amps./900°C Per Plug                              |
| Injector nozzle   | Type                         | Throttle Pintle  |
|   | Opening pressure [kPa (psi)] | 13,200 (1914)  |
| Pre-chamber design  |                              | Slant Bottom, 45° Throat Angle                         |
| Fuel in-jection pump  | Manufacturer                 | Nippondenso  |
|   | Type                         | Distributor  |
| Fuel injection pump drive (belt, chain, gear)               |                              | Belt   |
| Supplementary vacuum source (type)                          |                              | Electric Pump  |
| Fuel heater (yes/no)  |                              | Yes, Fuel Filter Conditioner                           |
| Water separator, description (std., opt.)                   |                              | Standard, Fuel Filter Conditioner                      |
| Turbo manufacturer  |                              | N.A.   |
| Oil cooler-type (oil to engine coolant; oil to ambient air) |                              | Engine Mounted, Oil to Water                           |
| Oil filter  |                              | Two; One (Full-Flow) Mtd. on Eng. & One (By-Pass) Mtd. |

## Engine – Intake System

|                              |      |
|------------------------------|------|
| Turbo charger - manufacturer | N.A. |
| Super charger - manufacturer | N.A. |
| Charge cooler                | N.A. |



# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6L HO/2V

1.6L/EFI

## Engine – Cooling System

|  |   |  |
|--|---|--|
| Coolant recovery system (std., opt., n.a.)     |   | Standard   |
| Coolant fill location (rad., bottle)           |   | Radiator with Additional 1/2L Fill In Bottle   |
| Radiator cap relief valve pressure [kPa (psi)] |   | 110.32 (16.0)  |
| Circulation thermostat                         | Type (choke, bypass)                            | Choke  |
|  | Starts to open at °C (°F)                       | 88.96 (192.0)  |
| Water pump                                     | Type (centrifugal, other)                       | Centrifugal  |
|  | GPM 1000 pump rpm                               | 19L (5 GPM)  |
|  | Number of pumps                                 | One  |
|  | Drive (V-belt, other)                           | Timing Belt  |
|  | Bearing type                                    | Ball-Roller  |
| By-pass recirculation [type (inter., ext.)]    |   | External   |
| Cooling system capacity                        | With heater—L(qt.)                              | 6.3 (6.7)  |
|  | With air cond.—L(qt.)                           | 7.7 (8.1)  |
|  | Opt. equipment [specify—L(qt.)]                 | --   |
| Water jackets full length of cyl. (yes, no)    |   | Yes  |
| Water all around cylinder (yes, no)            |   | Yes  |
| Radiator core                                  | Describe (type, material, no. of rows)          | Crossflow-Copper/Brass (with A/C), Aluminum (with Heater)<br>Tube and Fin Two Row with Plastic End Tanks |
|  | Std., A/C, HD                                   | Std. A/C   |
|  | Width   | 407 (16.02) 591 (23.27)  |
|  | Height  | 321 (12.64) 321 (12.64)  |
|  | Thickness                                       | 34 (1.34) 29.0 (1.14)  |
|  | Fins per inch                                   | 13.5 (M/T), 15.5 (A/T) 10.5 (M/T), 13 (A/T)  |
| Fan  | Std., elec., opt.                               | Electric   |
|  | Number of blades & type (flex, solid, material) | Four, Solid, Plastic   |
|  | Diameter & projected width                      | 304.8 (12.0)   |
|  | Ratio (fan to crankshaft rev.)                  | N.A.   |
|  | Fan cutout type                                 | N.A.   |
|  | Drive [type (direct, remote)]                   | N.A.   |
|  | RPM at idle (elec.)                             | 1850   |
|  | Motor rating (wattage) (elec.)                  | 80   |
|  | Motor switch (type & location) (elec.)          | Thermostatic - Water Outlet Connection   |
|  | Switch point (temp., pressure) (elec.)          | Temp. 105 (221°)   |
|  | Fan shroud (material)                           | Metal  |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L TC/EFI  
(97.6 CID)

## Engine – Cooling System

|  |   |   |
|--|---|---|
| Coolant recovery system (std., opt., n.a.)     |   | Standard                                      |
| Coolant fill location (rad., bottle)           |   | Radiator with Additional 1/2 L Fill in Bottle |
| Radiator cap relief valve pressure [kPa (psi)] |   | 110.3 (16.0)                                  |
| Circulation thermostat                         | Type (choke, bypass)                            | Choke   |
|  | Starts to open at °C (°F)                       | 89.0 (192.0)                                  |
| Water pump                                     | Type (centrifugal, other)                       | Centrifugal                                   |
|  | GPM 1000 pump rpm                               | 19L (5 GPM)                                   |
|  | Number of pumps                                 | One   |
|  | Drive (V-belt, other)                           | Timing Belt                                   |
|  | Bearing type                                    | Ball-Roller                                   |
| By-pass recirculation [type (inter., ext.)]    |   | External                                      |
| Cooling system capacity                        | With heater—L(qt.)                              | 6.3 (6.7)                                     |
|  | With air cond.—L(qt.)                           | 7.7 (8.1)                                     |
|  | Opt. equipment [specify—L(qt.)]                 | N.A.  |
| Water jackets full length of cyl. (yes, no)    |   | Yes   |
| Water all around cylinder (yes, no)            |   | Yes   |
| Radiator core                                  | Describe (type, material, no. of rows)          | Crossflow, Vacuum Brazed Aluminum, Two Rows   |
|  | Std., A/C, HD                                   | Std. and A/C                                  |
|  | Width   | 589.3 (23.2)                                  |
|  | Height  | 335.3 (13.2)                                  |
|  | Thickness                                       | 44.2 (1.7)                                    |
|  | Fins per inch                                   | Eleven  |
| Fan  | Std., elec., opt.                               | Electric                                      |
|  | Number of blades & type (flex, solid, material) | Two Fans - Four Blades Solid, Plastic         |
|  | Diameter & projected width                      | 254.0 (10.0) A/C, 304.8 (12.0) Heater         |
|  | Ratio (fan to crankshaft rev.)                  | N.A.  |
|  | Fan cutout type                                 | N.A.  |
|  | Drive [type (direct, remote)]                   | N.A.  |
|  | RPM at idle (elec.)                             | 1850  |
|  | Motor rating (wattage) (elec.)                  | 160 A/C, 80 Heater                            |
|  | Motor switch (type & location) (elec.)          | Thermostat - Water Outlet Connection          |
|  | Switch point (temp., pressure) (elec.)          | 105 (221°)                                    |
|  | Fan shroud (material)                           | Metal   |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## Engine – Cooling System

|  |   |   |
|--|---|---|
| Coolant recovery system (std., opt., n.a.)     |   | Standard  |
| Coolant fill location (rad., bottle)           |   | Radiator Initially, Bottle in Service               |
| Radiator cap relief valve pressure [kPa (psi)] |   | 110.3 (16)  |
| Circulation thermostat                         | Type (choke, bypass)                            | Choke   |
|  | Starts to open at °C (°F)                       | 87.8 <sup>0</sup> (190 <sup>0</sup> F)              |
| Water pump                                     | Type (centrifugal, other)                       | Centrifugal   |
|  | GPM 1000 pump rpm                               | 32 GPH @ 4000 Pump RPM                              |
|  | Number of pumps                                 | One   |
|  | Drive (V-belt, other)                           | Cog Belt (Timing Belt)                              |
|  | Bearing type                                    | Ball Bearing (Integral)                             |
| By-pass recirculation [type (inter., ext.)]    |   | External (Heater & Oil Cooler)                      |
| Cooling system capacity                        | With heater-L(qt.)                              | 8.7 (9.2)   |
|  | With air cond.-L(qt.)                           | 8.7 (9.2)   |
|  | Opt. equipment [specify-L(qt.)]                 | N.A.  |
| Water jackets full length of cyl. (yes, no)    |   | Yes   |
| Water all around cylinder (yes, no)            |   | No (Siamese)  |
| Radiator core                                  | Describe (type, material, no. of rows)          | Cross Flow, Vacuum Brazed Aluminum, Two Rows        |
|  | Std., A/C, HD                                   | Standard A/C  |
|  | Width   | 593.3 (23.36)                                       |
|  | Height  | 332.7 (13.10)                                       |
|  | Thickness                                       | 44.45 (1.75)  |
|  | Fins per inch                                   | Nine Ten  |
| Fan  | Std., elec., opt.                               | Electric  |
|  | Number of blades & type (flex, solid, material) | 4 and Solid, Steel                                  |
|  | Diameter & projected width                      | 312.4 x 35.6 (12.3 x 1.4) 304.8 x 35.6 (12.0 x 1.4) |
|  | Ratio (fan to crankshaft rev.)                  | N.A.  |
|  | Fan cutout type                                 | N.A.  |
|  | Drive [type (direct, remote)]                   | Direct  |
|  | RPM at idle (elec.)                             | 1850 RPM 2250 RPM                                   |
|  | Motor rating (wattage) (elec.)                  | 80 Watt 155 Watt                                    |
|  | Motor switch (type & location) (elec.)          | Elec. Sensor & Thermo.Hse. On/Off A/C Function      |
|  | Switch point (temp., pressure) (elec.)          | 99.0°C (210 <sup>0</sup> F)                         |
|  | Fan shroud (material)                           | Plastic   |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6L HO/2V

1.6L/EFI

## Engine – Fuel System (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

|   |  |           |                                  |                           |
|---|--|-----------|----------------------------------|---------------------------|
| Induction type: carburetor, fuel injection system, etc.               |  |           | Carburetor                       | Electronic Fuel Injection |
| Carburetor  | Mfr.   |           | Holly                            |                           |
|   | Choke (type)   |           | Automatic-Electric               |                           |
|   | Idle spd.-rpm (spec. neutral or drive and propane if used) | Manual    | 800 with Electric Fan "On"       |                           |
|   |  |           | --                               |                           |
|   |  | Automatic | Drive: 750 RPM                   |                           |
|   |  | --        |                                  |                           |
| Idle A/F mix.   |  |           | 9.44 ATX (304C), 8.86 ATX (303D) |                           |
| Fuel injection  | Point of injection (no.)                                   |           | N.A.                             | Port                      |
|   | Constant, pulse, flow                                      |           | N.A.                             | Pulse                     |
|   | Control (electronic, mech.)                                |           | N.A.                             | Electronic                |
|   | System pressure [kPa (psi)]                                |           | N.A.                             | 31.02 (4.5)               |
| Intake manifold heat control (exhaust or water thermostatic or fixed) |  |           | N.A.                             |                           |
| Air cleaner type  | Standard   |           | Pleated Paper                    |                           |
|   | Optional   |           | N.A.                             |                           |
| Fuel pump   | Type (elec. or mech.)                                      |           | Mechanical                       | Electric                  |
|   | Location (eng., tank)                                      |           | Cylinder Head                    | Floor Pan Body Mount      |
|   | Pressure range [kPa (psi)]                                 |           | 27.6-41.4 (4.0-6.0)              | 269 (39) Nominal          |

## Fuel Tank

|                               |                          |   |     |
|-------------------------------|--------------------------|---|-----|
| Capacity [refill L (gallons)] |                          | 49.2 (13 Gal.) Standard (a)                         |     |
| Location (describe)           |                          | In Front of Rear Suspension                         |     |
| Attachment                    |                          | Two Straps with Pin and Loop at Rear, Bolt at Front |     |
| Material                      |                          | Steel (Terne Plate)                                 |     |
| Filler pipe                   | Location & material      | Right Rear Quarter Panel; Steel                     |     |
|                               | Connection to tank       | Rubber Hoses  |     |
| Fuel line (material)          |                          | Steel   |     |
| Fuel hose (material)          |                          | Reinforced Rubber (Non-EFI)                         | (b) |
| Return line (material)        |                          | Steel   |     |
| Vapor line (material)         |                          | Steel   |     |
| Extended range tank           | Opt., n.a.               | N.A.  |     |
|                               | Capacity [L (gallons)]   | N.A.  |     |
|                               | Location & material      | N.A.  |     |
|                               | Attachment               | N.A.  |     |
| Auxiliary tank                | Opt., n.a.               | N.A.  |     |
|                               | Capacity [L (gallons)]   | N.A.  |     |
|                               | Location & material      | N.A.  |     |
|                               | Attachment               | N.A.  |     |
|                               | Selector switch or valve | N.A.  |     |
|                               | Separate fill            | N.A.  |     |

(a) 37.9 (10.0 gallon) Fuel Tank Available on Certain Select Models

(b) Rubber Covered Nylon with Push Connect Fittings (W/EFI)

**MVMA Specifications Form**  
**Passenger Car**  
**METRIC (U.S. Customary)**

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

Engine Description/Carb.  
 Engine Code

1.6L TC/EFI  
 (97.6 CID)

**Engine – Fuel System** (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

|   |  |   |                            |
|---|--|---|----------------------------|
| Induction type: carburetor, fuel injection system, etc.               |  | <b>Electronic Fuel Injection System</b> |                            |
| Carburetor  | Mfgr.  | American Bosch                          |                            |
|   | Choke (type)   | N.A.                                    |                            |
|   | Idle spd.-rpm (spec. neutral or drive and propane if used) | Manual                                  | 800 With Electric Fan "ON" |
|   |  | Automatic                               | N.A.                       |
| Idle A/F mix.   |  |   |                            |
| Fuel injection  | Point of injection (no.)                                   | Cylinder Port                           |                            |
|   | Constant, pulse, flow                                      | Pulse                                   |                            |
|   | Control (electronic, mech.)                                | Electronic                              |                            |
|   | System pressure [kPa (psi)]                                | 268.9 (39.0)                            |                            |
| Intake manifold heat control (exhaust or water thermostatic or fixed) |  | N.A.                                    |                            |
| Air cleaner type  | Standard   | Pleated Paper                           |                            |
|   | Optional   | N.A.                                    |                            |
| Fuel pump   | Type (elec. or mech.)                                      | Electric                                |                            |
|   | Location (eng., tank)                                      | In Line Frame Mounted                   |                            |
|   | Pressure range [kPa (psi)]                                 | 268.9 (39.0)                            |                            |

**Fuel Tank**

|                               |                          |   |
|-------------------------------|--------------------------|---|
| Capacity [refill L (gallons)] |                          | 49.2 (13 Gal) Standard                              |
| Location (describe)           |                          | In Front of Rear Axle                               |
| Attachment                    |                          | Two Straps with Pin and Loop at Rear, Bolt at Front |
| Material                      |                          | Steel Terne Plate                                   |
| Filler pipe                   | Location & material      | Right Rear Quarter Panel; Steel                     |
|                               | Connection to tank       | Rubber Hoses  |
| Fuel line (material)          |                          | Steel   |
| Fuel hose (material)          |                          | Rubber Covered Nylon with Push Connect Fittings     |
| Return line (material)        |                          | Steel   |
| Vapor line (material)         |                          | Steel   |
| Extended range tank           | Opt., n.a.               | N.A.  |
|                               | Capacity [L (gallons)]   | N.A.  |
|                               | Location & material      | N.A.  |
|                               | Attachment               | N.A.  |
| Auxiliary tank                | Opt., n.a.               | N.A.  |
|                               | Capacity [L (gallons)]   | N.A.  |
|                               | Location & material      | N.A.  |
|                               | Attachment               | N.A.  |
|                               | Selector switch or valve | N.A.  |
|                               | Separate fill            | N.A.  |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## Engine - Fuel System (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

|   |  |   |      |
|---|--|---|------|
| Induction type: carburetor, fuel injection system, etc.               |  | Fuel Injection System   |      |
| Carburetor  | Mfgr.  | N.A.  |      |
|   | Choke (type)   | N.A.  |      |
|   | Idle spd.-rpm (spec. neutral or drive and propane if used) | Manual  | N.A. |
|   |  | Automatic   | N.A. |
| Idle A/F mix.   |  | N.A.  |      |
| Fuel injection  | Point of injection (no.)                                   | 4-Point-Pre Chamber   |      |
|   | Constant, pulse, flow                                      | Mechanical  |      |
|   | Control (electronic, mech.)                                | Mechanical  |      |
|   | System pressure [kPa (psi)]                                | 13,200 (1914)   |      |
| Intake manifold heat control (exhaust or water thermostatic or fixed) |  | N.A.  |      |
| Air cleaner type  | Standard   | Paper Filter, 1.5 Sq. Meters, 10" H <sub>2</sub> O System Δ P |      |
|   | Optional   | Above, With Hot Water System to Prevent Snow Packing          |      |
| Fuel pump   | Type (elec. or mech.)                                      | Mechanical-Distributor (Integrated in F.I.P.)                 |      |
|   | Location (eng., tank)                                      | Engine - Belt Driven  |      |
|   | Pressure range [kPa (psi)]                                 | 780 (113.1)   |      |

## Fuel Tank

|                               |                          |   |
|-------------------------------|--------------------------|---|
| Capacity [refill L (gallons)] |                          | 49.2 (13 Gal) Standard                              |
| Location (describe)           |                          | In Front of Rear Axle                               |
| Attachment                    |                          | Two Straps with Pin and Loop at Rear, Bolt at Front |
| Material                      |                          | Steel Terne Plate                                   |
| Filler pipe                   | Location & material      | Right Rear Quarter Panel; Steel                     |
|                               | Connection to tank       | Rubber Hoses  |
| Fuel line (material)          |                          | Steel   |
| Fuel hose (material)          |                          | Reinforced Rubber                                   |
| Return line (material)        |                          | Steel   |
| Vapor line (material)         |                          | N.A.  |
| Extended range tank           | Opt., n.a.               | N.A.  |
|                               | Capacity [L (gallons)]   | N.A.  |
|                               | Location & material      | N.A.  |
|                               | Attachment               | N.A.  |
| Auxiliary tank                | Opt., n.a.               | N.A.  |
|                               | Capacity [L (gallons)]   | N.A.  |
|                               | Location & material      | N.A.  |
|                               | Attachment               | N.A.  |
|                               | Selector switch or valve | N.A.  |
|                               | Separate fill            | N.A.  |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6 HO/2V

1.6L/EFI

## Vehicle Emission Control

|                              |  |  |                                 |
|------------------------------|--|--|---------------------------------|
| Exhaust Emission Control     | Type (air injection, engine modifications, other)        |  | Air Injection                   |
|                              | Air Injection  | Pump or pulse  | Van Type, Constant Disp.        |
|                              |  | Driven by  | Belt                            |
|                              |  | Air distribution (head, manifold, etc.)                          | Manifold and Underbody Catalyst |
|                              |  | Point of entry   | Manifold Gallery and Catalyst   |
|                              | Exhaust Gas Recirculation                                | Type (controlled flow, open orifice, other)                      | Controlled Flow                 |
|                              |  | Exhaust source   | Exhaust Manifold #4 Runner      |
|                              |  | Point of exhaust injection (spacer, carburetor, manifold, other) | Intake Manifold Plenum          |
|                              | Catalytic Converter                                      | Type   | TWC/COC Converter M.T.A. (a)    |
|                              |  | Number of  | One                             |
| Location(s)                  |  | Underbody  |                                 |
| Volume [L (in³)]             |  | 2.4 (153) 1.5 (93)   |                                 |
| Substrate type               |  | Monolithic - Ceramic   |                                 |
| Crankcase Emission Control   | Type (ventilates to atmosphere, induction system, other) |  |                                 |
|                              | Energy source (manifold vacuum, carburetor, other)       |  |                                 |
|                              | Discharges (to intake manifold, other)                   |  |                                 |
|                              | Air inlet (breather cap, other)                          |  |                                 |
| Evaporative Emission Control | Vapor vented to (crankcase, canister, other)             | Fuel tank  | Vented to Carbon Canister       |
|                              | Carburetor   |  |                                 |
|                              | Vapor storage provision                                  |  | Carbon Canister                 |
| Electronic system            | Closed loop (yes/no)                                     |  |                                 |
|                              | Open loop (yes/no)                                       |  |                                 |

## Engine - Exhaust System

|  |                             |  |
|--|-----------------------------|--|
| Type (single, single with cross-over, dual, other)                   |                             | Single   |
| Muffler no. & type (reverse flow, straight thru, separate resonator) |                             | Reverse Flow   |
| Resonator no. & type   |                             | N.A.   |
| Exhaust pipe   | Branch o.d., wall thickness | N.A.   |
|  | Main o.d., wall thickness   | N.A.   |
|  | Material                    | N.A.   |
| Inter-mediate pipe   | o.d. & wall thickness       | 51 x 1.37 (2.0 x .054)                                 |
|  | Material                    | Low Carbon Aluminum Coated                             |
| Tail pipe  | o.d. & wall thickness       | 42 x 1.37 (1.62 x .054); 44.5 x 1.37 (1.75 x .054) (b) |
|  | Material                    | Aluminized Low Carbon Steel                            |

(a) TWC Converter Pulse Air

(b) GT Model - 51.0 x 1.37 (2.0 x .054)

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L TC/EFI  
(97.6 CID)

## Vehicle Emission Control

|   |  |  |                           |
|---|--|--|---------------------------|
| Exhaust<br>Emission<br>Control          | Type (air injection, engine modifications, other)        |  | Air Injection             |
|   | Air<br>Injection   | Pump or pulse  | N.A.                      |
|   |  | Driven by  | N.A.                      |
|   |  | Air distribution (head, manifold, etc.)                          | Catalyst                  |
|   |  | Point of entry   | Catalyst                  |
|   | Exhaust<br>Gas<br>Recircula-<br>tion                     | Type (controlled flow, open orifice, other)                      | Controlled Flow           |
|   |  | Exhaust source   |                           |
|   |  | Point of exhaust injection (spacer, carburetor, manifold, other) | Intake Manifold Plenum    |
|   | Catalytic<br>Converter                                   | Type   | TWC Converter Pulse Air   |
|   |  | Number of  | One                       |
| Location(s)                             |  | Underbody  |                           |
| Volume [L (in³)]                        |  | 1.5 (93)   |                           |
| Substrate type                          |  | Monolithic - Ceramic   |                           |
| Crankcase<br>Emission<br>Control        | Type (ventilates to atmosphere, induction system, other) |  |                           |
|   | Energy source (manifold vacuum, carburetor, other)       |  |                           |
|   | Discharges (to intake manifold, other)                   |  |                           |
|   | Air inlet (breather cap, other)                          |  |                           |
| Evapora-<br>tive<br>Emission<br>Control | Vapor vented to (crankcase, canister, other)             | Fuel tank  | Vented to Carbon Canister |
|   |  | Carburetor   |                           |
|   | Vapor storage provision                                  |  | Carbon Canister           |
| Electronic<br>system                    | Closed loop (yes/no)                                     |  |                           |
|   | Open loop (yes/no)                                       |  |                           |

## Engine - Exhaust System

|  |                             |  |
|--|-----------------------------|--|
| Type (single, single with cross-over, dual, other)                   |                             | Single   |
| Muffler no. & type (reverse flow, straight thru, separate resonator) |                             | Single Reverse Flow                                  |
| Resonator no. & type   |                             | N.A.   |
| Exhaust<br>pipe  | Branch o.d., wall thickness | N.A.   |
|  | Main o.d., wall thickness   | N.A.   |
|  | Material                    | N.A.   |
| Inter-<br>mediate<br>pipe  | o.d. & wall thickness       | 51 x 1.37 (2.0 x .054)                               |
|  | Material                    | Low Carbon Aluminum Coated                           |
| Tail<br>pipe   | o.d. & wall thickness       | 44.5 x 1.37 (1.75 x .054); 57.0 x 1.37 (2.25 x .054) |
|  | Material                    | Aluminized Low Carbon Steel                          |



# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## Vehicle Emission Control

|   |  |  |                      |
|---|--|--|----------------------|
| Exhaust<br>Emission<br>Control          | Type (air injection, engine modifications, other)        |  | Engine Modifications |
|   | Air<br>Injection   | Pump or pulse  | N.A.                 |
|   |  | Driven by  | N.A.                 |
|   |  | Air distribution (head, manifold, etc.)                          | N.A.                 |
|   |  | Point of entry   | N.A.                 |
|   | Exhaust<br>Gas<br>Recirculation                          | Type (controlled flow, open orifice, other)                      | N.A.                 |
|   |  | Exhaust source   | N.A.                 |
|   |  | Point of exhaust injection (spacer, carburetor, manifold, other) | N.A.                 |
|   | Catalytic<br>Converter                                   | Type   | N.A.                 |
|   |  | Number of  | N.A.                 |
|   |  | Location(s)  | N.A.                 |
|   |  | Volume [L (in³)]   | N.A.                 |
| Substrate type                          |  | N.A.   |                      |
| Crankcase<br>Emission<br>Control        | Type (ventilates to atmosphere, induction system, other) |  | Induction System     |
|   | Energy source (manifold vacuum, carburetor, other)       |  | Sump Pressure        |
|   | Discharges (to intake manifold, other)                   |  | Intake Manifold      |
|   | Air inlet (breather cap, other)                          |  |                      |
| Evapora-<br>tive<br>Emission<br>Control | Vapor vented to (crankcase, canister, other)             | Fuel tank  | Vented to Atmosphere |
|   |  | Carburetor   | N.A.                 |
|   | Vapor storage provision                                  |  | N.A.                 |
| Electronic<br>system                    | Closed loop (yes/no)                                     |  |                      |
|   | Open loop (yes/no)                                       |  |                      |

## Engine - Exhaust System

|  |                             |                            |
|--|-----------------------------|----------------------------|
| Type (single, single with cross-over, dual, other)                   |                             | Single                     |
| Muffler no. & type (reverse flow, straight thru, separate resonator) |                             | Single Reverse Flow        |
| Resonator no. & type   |                             | Single Straight Thru       |
| Exhaust<br>pipe  | Branch o.d., wall thickness | N.A.                       |
|  | Main o.d., wall thickness   | N.A.                       |
|  | Material                    | N.A.                       |
| Inter-<br>mediate<br>pipe  | o.d. & wall thickness       | 51 x 1.37 (2.0 x .054)     |
|  | Material                    | Low Carbon Aluminum Coated |
| Tail<br>pipe   | o.d. & wall thickness       | 44.0 x 1.37 (1.73 x .054)  |
|  | Material                    | Low Carbon Aluminum Coated |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6L HO/2V

1.6L/EFI  
1.6L TC/EFI

## Transmissions/Transaxle

|  |               |
|--|---------------|
| Manual 3-speed (std., opt., n.a.)      | N.A.          |
| Manual 4-speed (std., opt., n.a.)      | Standard N.A. |
| Manual 5-speed (std., opt., n.a.)      | N.A. Standard |
| Manual overdrive (std., opt., n.a.)    | N.A.          |
| Automatic (std., opt., n.a.)           | Optional      |
| Automatic overdrive (std., opt., n.a.) | N.A.          |

## Manual Transmission/Transaxle

| Number of forward speeds            |                        | Four/FS (a)       | Four/WR (b)  | Five (c)     |
|-------------------------------------|------------------------|-------------------|--------------|--------------|
| Transmission ratios                 | In first (Final Drive) | 3.23 (9.82)       | 3.58 (12.85) | 3.60 (13.42) |
|                                     | In second " "          | 1.92 (5.84)       | 2.05 (7.36)  | 2.12 (7.90)  |
|                                     | In third " "           | 1.23 (3.74)       | 1.23 (4.42)  | 1.39 (5.20)  |
|                                     | In fourth " "          | 0.81 (2.46)       | 0.81 (2.91)  | 1.02 (3.81)  |
|                                     | In fifth " "           | - -               | - -          | 1.02 (2.79)  |
|                                     | In overdrive           | - -               | - -          | - -          |
|                                     | In reverse " "         | 3.46 (10.52)      | 3.46 (12.42) | 3.62 (13.48) |
| Synchronous meshing (specify gears) |                        | All Forward Gears |              |              |
| Shift lever location                |                        | Floor             |              |              |
| Lubricant                           | Capacity [L (pt.)]     | 2.5 (5.3)         |              | 2.9 (6.1)    |
|                                     | Type recommended       | (d)               |              | (d)          |
|                                     | SAE viscosity number   | Summer            | N.A.         |              |
|                                     |                        | Winter            | N.A.         |              |
|                                     |                        | Extreme cold      | N.A.         |              |

## Clutch (Manual Transmission)

|                                   |   |  |
|-----------------------------------|---|--|
| Make, type, engagement (describe) |   | Single Disc, Dry Plate                                       |
| Type pressure plate springs       |   | Belleville Spring  |
| Total spring load [N (lb.)]       |   | 3850 (865)   |
| No. of clutch driven discs        |   | One  |
| Clutch facing                     | Material  | Woven Non-Asbestos   |
|                                   | Manufacturer  | Valeo  |
|                                   | Part number   | ELER-7550-AB & BB  |
|                                   | Rivets/plate  | 12   |
|                                   | Rivet size  | 3.9 x 6.0 (5/32 x 15/64)                                     |
|                                   | Outside & inside dia.                                 | 200 (7.875) & 134 (5.275)                                    |
|                                   | Total eff. area [cm <sup>2</sup> (in. <sup>2</sup> )] | 346 (53.7)   |
|                                   | Thickness   | 3.43 (0.135)   |
|                                   | Engagement cushion method                             | Torbend Disc   |
| Release bearing                   | Type & method of lubrication                          | Self Centering, Angular Contact, Constant Running, Prepacked |
| Torsional damping                 | Method: springs, friction material                    | Multi-Stage, Springs & Friction Material                     |

**FINAL DRIVE RATIOS** (a) Standard - 3.04:1 (b) Standard - 3.59:1  
(c) The 5-speed is a unique arrangement utilizing dual final drive, one for 1st through 4th and reverse (3.73:1) and one for 5th (2.73:1).  
(d) Automatic Transmission Fluid ESW-M2C33F (95.2% Volume) Plus Friction Modifier EST-M2C118-A (4.8% by Volume).

# MVMA Specifications Form Passenger Car

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

**METRIC (U.S. Customary)**

Engine Description/Carb.  
Engine Code

2.0L/DIESEL  
(121 CID)

## Transmissions/Transaxle

|  |          |
|--|----------|
| Manual 3-speed (std., opt., n.a.)      | N.A.     |
| Manual 4-speed (std., opt., n.a.)      | N.A.     |
| Manual 5-speed (std., opt., n.a.)      | Standard |
| Manual overdrive (std., opt., n.a.)    | N.A.     |
| Automatic (std., opt., n.a.)           | N.A.     |
| Automatic overdrive (std., opt., n.a.) | N.A.     |

## Manual Transmission/Transaxle

|                                     |                        |                   |
|-------------------------------------|------------------------|-------------------|
| Number of forward speeds            |                        | Five (a)          |
| Transmission ratios                 | In first (Final Drive) | 3.93 (13.84)      |
|                                     | In second " "          | 2.12 (7.47)       |
|                                     | In third " "           | 1.39 (4.91)       |
|                                     | In fourth " "          | 0.98 (3.45)       |
|                                     | In fifth " "           | 0.98 (2.56)       |
|                                     | In overdrive " "       | 0.98 (2.56)       |
|                                     | In reverse " "         | 3.62 (12.73)      |
| Synchronous meshing (specify gears) |                        | All Forward Gears |
| Shift lever location                |                        | Floor             |
| Lubricant                           | Capacity [L (pt.)]     | 2.9 (6.1)         |
|                                     | Type recommended       | M2C33F            |
|                                     | SAE viscosity number   | Summer            |
|                                     |                        | Winter            |
|                                     |                        | Extreme cold      |

## Clutch (Manual Transmission)

|                                   |   |  |
|-----------------------------------|---|--|
| Make, type, engagement (describe) |   | Single Disc, Dry Plate                                       |
| Type pressure plate springs       |   | Belleville Spring  |
| Total spring load [N (lb.)]       |   | 3850 (865)   |
| No. of clutch driven discs        |   | One  |
| Clutch facing                     | Material  | Woven Non-Asbestos   |
|                                   | Manufacturer  | Valeo  |
|                                   | Part number   | ELER-7750-AB & BB  |
|                                   | Rivets/plate  | 12   |
|                                   | Rivet size  | 3.9 x 6.0 (5/32 x 15/64)                                     |
|                                   | Outside & inside dia.                                 | 200 (7.875) & 134 (5.275)                                    |
|                                   | Total eff. area [cm <sup>2</sup> (in. <sup>2</sup> )] | 346 (53.7)   |
|                                   | Thickness   | 3.43 (0.135)   |
| Engagement cushion method         |   | Torbend Disc   |
| Release bearing                   | Type & method of lubrication                          | Self Centering, Angular Contact, Constant Running, Prepacked |
| Torsional damping                 | Method: springs, friction material                    | Multi-Stage, Springs & Friction Material                     |

(a) The 5-speed is a unique arrangement utilizing dual final drive, a higher numerical ratio for 1st through 4th and reverse (3.52:1) and a lower numerical ratio for 5th (2.61:1).

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

ALL MODELS

## Automatic Transmission/Transaxle

|  |                               |   |
|--|-------------------------------|---|
| Trade name   |                               | Transaxle (ATX)   |
| Type and special features (describe)                         |                               | ATX-Wide Ratio, 3-Speed with Open Torque Converter in Low and Split-Torque in Intermediate and High |
| Selector   | Location                      | Floor Mounted T-Bar Design  |
|  | Ltr./No. designation          | P R N D 2 1   |
| Gear ratios  | R                             | 1.97:1  |
|  | D                             | 1.00:1  |
|  | L <sub>3</sub>                | - -   |
|  | L <sub>2</sub>                | 1.61:1  |
|  | L <sub>1</sub>                | 2.79:1  |
| Max. upshift speed - drive range [km/h (mph)]                |                               | 124 (77)  |
| Max. kickdown speed - drive range [km/h (mph)]               |                               | 114 (71)  |
| Min. overdrive speed [km/h (mph)]                            |                               | - -   |
| Torque converter   | Number of elements            | Three   |
|  | Max. ratio at stall           | 2.37:1  |
|  | Type of cooling (air, liquid) | Liquid  |
|  | Nominal diameter              | 235 (9.25)  |
| Lubricant  | Capacity [refill L (pt.)]     | 7.4 (15.7), Including Oil Cooler Lines  |
|  | Type Recommended              | M2C138-CJ/Dexron II for Service   |
| Oil cooler (std., opt., NA, internal, external, air, liquid) |                               |   |

## Axle or Front Wheel Drive Unit

|  |                      |  |
|--|----------------------|--|
| Type (front, rear)                                     |                      | Front Wheel Drive  |
| Description  |                      | MTX I - 4-Speed; ATX - Auto.; MTX III - 5-Speed (a)              |
| Limited slip differential (type)                       |                      | N.A.   |
| Drive pinion offset                                    |                      | N.A.   |
| Drive pinion (type)                                    |                      | N.A.   |
| No. of differential pinions                            |                      | Two  |
| Pinion / differential adjustment (shim, other)         |                      | N.A.   |
| Pinion / differential bearing adjustment (shim, other) |                      | N.A.   |
| Driving wheel bearing (type)                           |                      | Tapered Roller Bearings (Ball Bearing with 1.6L/EFI)             |
| Lubricant  | Capacity [L (pt.)]   | 2.5(5.3)-4 Spd Man; 2.9 (6.1)-5 Spd Man; 7.4 (15.7)-Auto.        |
|  | Type recommended     | Manual ATFESW-M2C33F; M2C-138-CJ Automatic/Dexron II for Service |
|  | SAE viscosity number | Summer N.A.  |
|  |                      | Winter N.A.  |
|  |                      | Extreme cold N.A.  |

## Axle or Transaxle Ratio and Tool Combinations (See 'Power Teams' for axle ratio usage.)

|  |                     |   |
|--|---------------------|---|
| Axle ratio (or overall top gear ratio) |                     | --  |
| No. of teeth                           | Pinion              | --  |
|  | Ring gear or gear   | --  |
| Ring gear o.d.                         |                     | --  |
| Transaxle                              | Transfer gear ratio | 3.04:1   3.31:1   3.59:1   3.52/2.61:1(a)   3.73/2.73:1 (a) |
|  | Final drive ratio   | 2.46:1   3.31:1   2.91:1   3.45/2.56:1   3.81/2.79:1        |

(a) The 5-speed is a unique arrangement utilizing dual final drive, a higher numerical ratio for 1st through 4th and reverse and a lower numerical ratio for 5th

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

ALL MODELS  
(Except with 1.6L TC/EFI)

## Axle Shafts – Front Wheel Drive

|   |                                     |  |                                |
|---|-------------------------------------|--|--------------------------------|
| Number used   |                                     | One Each, LH & RH Sides - Unequal Length |                                |
| Type (straight, solid bar, tubular, etc.)           |                                     | Left                                     | Solid Bar                      |
|   |                                     | Right                                    | Solid Bar                      |
| Outer diam. x length* x wall thickness              | Manual transmission 4-Speed O.D.    | Left                                     | 26.0 x 322.0 (1.02 x 12.68)    |
|   |                                     | Right                                    | 26.0 x 648.0 (1.02 x 25.51)    |
|   | Automatic transmission 3-Speed Opt. | Left                                     | 26.0 x 305.0 (1.02 x 12.01)    |
|   |                                     | Right                                    | 26.0 x 648.0 (1.02 x 25.51)    |
|   | Optional transmission 5-Speed O.D.  | Left                                     | 26.0 x 322.0 (1.02 x 12.68)    |
|   |                                     | Right                                    | 26.0 x 648.0 (1.02 x 25.51)    |
| Slip yoke   | Type                                | N.A.                                     |                                |
|   | Number of teeth                     | N.A.                                     |                                |
|   | Spline o.d.                         | N.A.                                     |                                |
| Universal joints                                    | Make and mfg. no.                   | Inner                                    | GKN & NTN                      |
|   |                                     | Outer                                    | GKN & NTN                      |
|   | Number used                         | 2 Inner & 2 Outer (4 Total)              |                                |
|   | Type, size, plunge                  | Inner                                    | 82 ST D.O.J., 44 (1.73) Plunge |
|   |                                     | Outer                                    | 87 AC Fixed                    |
|   | Attach (u-bolt, clamp, etc.)        |  | Non-Bolted                     |
|   | Bearing                             | Type (plain, anti-friction)              | N.A.                           |
|   |                                     | Lubrication (fitting, prepack)           | N.A.                           |
| Drive taken through (torque tube, arms or springs)  |                                     | N.A.                                     |                                |
| Torque taken through (torque tube, arms or springs) |                                     | N.A.                                     |                                |

\* Centerline to centerline of universal joints, or to centerline of attachment.

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/EFI TC  
(97.6 CID)

## Axle Shafts – Front Wheel Drive

|   |                                    |  |   |
|---|------------------------------------|--|---|
| Number used   |                                    | One Each, LH & RH Sides – Unequal Length |   |
| Type (straight, solid bar, tubular, etc.)           |                                    | Left                                     | Solid Bar                                 |
|   |                                    | Right                                    | Tubular                                   |
| Outer diam. x length* x wall thickness              | Manual transmission<br>5-Spd. O.D. | Left                                     | 27.2 x 318.5 (1.07 x 12.54)               |
|   |                                    | Right                                    | 44.9 x 645.2 x 3.9 (1.77 x 25.40 x 0.154) |
|   | Automatic transmission             | Left                                     | N.A.                                      |
|   |                                    | Right                                    | N.A.                                      |
|   | Optional transmission              | Left                                     | N.A.                                      |
|   |                                    | Right                                    | N.A.                                      |
| Slip yoke   | Type                               | N.A.                                     |   |
|   | Number of teeth                    | N.A.                                     |   |
|   | Spline o.d.                        | N.A.                                     |   |
| Universal joints                                    | Make and mfg. no.                  | Inner                                    | GKN                                       |
|   |                                    | Outer                                    | GKN                                       |
|   | Number used                        | 2 Inboard & 2 Outboard (4 Total)         |   |
|   | Type, size, plunge                 | Inner                                    | C2650 D.O.J., 41.5 (1.63)                 |
|   |                                    | Outer                                    | C2650 Fixed                               |
|   | Attach (u-bolt, clamp, etc.)       | Non-Bolted                               |   |
|   | Bearing                            | Type (plain, anti-friction)              | N.A.                                      |
| Lubrication (fitting, prepack)                      |                                    | N.A.                                     |   |
| Drive taken through (torque tube, arms or springs)  |                                    | N.A.                                     |   |
| Torque taken through (torque tube, arms or springs) |                                    | N.A.                                     |   |

\* Centerline to centerline of universal joints, or to centerline of attachment.

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

ALL MODELS

## Suspension - General

|                                   |                         |  |
|-----------------------------------|-------------------------|--|
| Car leveling                      | Std./opt./n.a.          | N.A.                                       |
|                                   | Type (air, hyd., etc.)  | - -  |
|                                   | Manual/auto. controlled | - -  |
| Provision for brake dip control   |                         | N.A.                                       |
| Provision for accl. squat control |                         | N.A.                                       |
| Provisions for car jacking        |                         | Notched Rocker Panel Positions             |
| Shock absorber (front & rear)     | Type                    | Strut Type - Front and Rear                |
|                                   | Make                    | Motorcraft (GT w/1.6L Turbo Engine - Koni) |
|                                   | Piston diameter         | 27 (1.06) Front and Rear                   |
|                                   | Rod diameter            | 20 (.90) Front, 18 (.70) Rear              |

## Suspension - Front

|                                |   |  |
|--------------------------------|---|--|
| Type and description           |   | McPherson Strut - Indep., Front Drive with Strut Mounted Coil Spring; Stab. - Bar - Track Control Arm                                    |
| Drive and torque taken through |   | Control Arm Bushings and Strut Mounts  |
| Travel                         | Full jounce   | 75.4 (2.97)  |
|                                | Full rebound  | 88.6 (3.49)  |
| Spring                         | Type (coil, leaf, other) & material                 | Coil, SAE-5160-H   |
|                                | Insulators (type & material)                        |  |
|                                | Size (coil design height & i.d., bar length x dia.) | Des. Ht. - 170.4, I.D.-86.0, Lgth-2533, Dia.-10.92; 2 Dr Sedan<br>Des. Ht. - 171.6, I.D.-86.0, Lgth-2584, Dia.-11.44; 4 Dr Sedan & Wagon |
|                                | Spring rate [N/mm (lb./in.)]                        | 21 (120) 2 Dr Sedan; 24.5 (140) 4 Dr Sedan & Wagon   |
|                                | Rate at wheel [N/mm (lb./in.)]                      | 18.1 (103) 2 Dr Sedan; 20.4 (117) 4 Dr Sedan & Wagon   |
| Stabilizer                     | Type (link, linkless, frameless)                    | Linkless, Dual Function Strut/Stabilizer   |
|                                | Material & bar diameter                             | Modified 1090, 22.0 (.87) Base; 24.0 (.94) Handling  |

## Suspension - Rear

|                                |   |  |
|--------------------------------|---|--|
| Type and description           |   | Modified McPherson-Strut Type; Independent, Non-Driven with Coil Spring on Lower Arm - Tie Bar - Cont.Arm-Forged Spindle |
| Drive and torque taken through |   | - -  |
| Travel                         | Full jounce   | 2 Dr 88.5 (3.5); 4 Dr 95.5 (3.8); Wagon 84.8 (3.3)   |
|                                | Full rebound  | 2 Dr 101.5 (4.0); 4 Dr 94.5 (3.7); Wagon 105.2 (4.1)   |
| Spring                         | Type (coil, leaf, other) & material                                 | Coil, SAE-5160-H Steel   |
|                                | Size (length x width, coil design height & i.d., bar length & dia.) | Des. Hgt.-2 Dr 151.9; 4 Dr 157.7; Wagon 150.6<br>ID-84mm Wire Dia.-2 Dr 11.8; 4 Dr 12.4; Wagon 12.4                      |
|                                | Spring rate [N/mm (lb./in.)]  | 2 Dr - 34.1 (195); 4 Dr - 41.2 (235); Wagon 41.2 (235)   |
|                                | Rate at wheel [N/mm (lb./in.)]                                      | 2 Dr - 13.9 (79); 4 Dr - 16.2 (93); Wagon 16.2 (93)  |
|                                | Insulators (type & material)  | Upper (Rubber) Insulator - Helical to Match Spring   |
|                                | If leaf   | No. of leaves - -  |
|                                |   | Shackle (comp. or tens.) - -   |
| Stabilizer                     | Type (link, linkless, frameless)                                    | - -  |
|                                | Material & bar diameter   | - -  |
| Track bar (type)               |   | Tie Bar, Forged Eye-Fore/Aft; Lower Arm Pre-Galvanized Stp   |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

2-DOOR HATCHBACK

4-DOOR HATCHBACK &  
4-DOOR WAGON

## Brakes - Service

|  |   |                                       |   |  |
|--|---|---------------------------------------|---|--|
| Description  |   |                                       | Four Wheel  |  |
| Brake type<br>(std., opt., n.a.)                                     | STD.                                      | Front (disc or drum)                  | Disc  |  |
|  |   | Rear (disc or drum)                   | Drum  |  |
| Self-adjusting (std., opt., n.a.)                                    |   |                                       | Standard  |  |
| Special<br>valving   | Type (proportion, delay, metering, other) |                                       |   |  |
|  |   |                                       | Pressure Differential and Proportioning                   |  |
| Power brake (std., opt., n.a.)                                       |   |                                       | Optional (Standard with Wagon)                            |  |
| Booster type (remote, integral, vac., hyd., etc.)                    |   |                                       | 200 (7.87) Single Diaphragm - Integral - Vacuum           |  |
| Vacuum source (inline, pump, etc.)                                   |   |                                       | Inline-Gas, Pump-2.0L/Diesel                              |  |
| Vacuum reservoir (volume in. <sup>3</sup> )                          |   |                                       | 90 (2.0L Diesel)  |  |
| Vacuum pump-type (elec, gear driven, belt driven, if other so state) |   |                                       | Electric (2.0L Diesel)                                    |  |
| Anti-skid device type (std., opt., n.a.) (F/R)                       |   |                                       | N.A.  |  |
| Effective area [cm <sup>2</sup> (in. <sup>2</sup> )]*                |   |                                       | 163.3 (25.3)/230.4 (35.7) 163.2 (25.3)/271.6 (42.1)       |  |
| Gross lining area [cm <sup>2</sup> (in. <sup>2</sup> )]**(F/R)       |   |                                       | 175.0 (28.0)/230.4 (35.7) 175.0 (28.0)/287.0 (44.5)       |  |
| Swept area [cm <sup>2</sup> (in. <sup>2</sup> )]*** (F/R)            |   |                                       | 951.0 (147.4)/348.3 (54.0) 951.0 (147.4)/433.7 (67.2)     |  |
| Rotor  | Outerworking diameter                     | F/R                                   | 235 (9.25)  |  |
|  | Inner working diameter                    | F/R                                   | 152 (5.98)  |  |
|  | Thickness                                 | F/R                                   | 24 (0.94)   |  |
|  | Material & type (vented/solid)            | F/R                                   | Cast Iron Vented  |  |
| Drum   | Diameter & width                          | F/R                                   | 180 (7.10) 203 (8.0)                                      |  |
|  | Type and material                         | F/R                                   | Cast Iron   |  |
| Wheel cylinder bore  |   |                                       | 54 (2.13) Front, 20.6 (0.81) Rear                         |  |
| Master cylinder  | Bore/stroke                               | F/R                                   | 21 (.827) Bore, 32 (1.26) Manual Stroke 34.3 (1.35) Power |  |
| Pedal arc ratio  |   |                                       | 5.2:1 Manual, 3.5:1 Power                                 |  |
| Line pressure at 445 N(100 lb.) pedal load [kPa (psi)]               |   |                                       | 1580 psi  |  |
| Lining clearance (F/R)   |   |                                       | 0.13 (.005) Front/0.38 (.015) Rear                        |  |
| Brake<br>lining  | Front<br>wheel                            | Bonded or riveted (rivets/seg.)       |   | Riveted 6/Seg.                                       |
|  |   | Rivet size                            |   | 4.7 (.185)   |
|  |   | Manufacturer                          |   | Thiokol  |
|  |   | Lining code                           |   | TP-1353M-FF  |
|  |   | Material                              |   | Molded Organic                                       |
|  |   | ****                                  | Primary or out-board                                      | 103 x 39.7 x 11.1 (4.05 x 1.56 x .437)               |
|  |   | Size                                  | Secondary or in-board                                     | 103 x 39.7 x 11.1 (4.05 x 1.56 x .437)               |
|  |   | Shoe thickness (no lining)            |   | 4.8 (.189) Nominal                                   |
|  | Rear<br>wheel                             | Bonded or riveted (rivets/seg.)       |   | Bonded Riveted 10/Seg.                               |
|  |   | Manufacturer                          |   | Bendix   |
|  |   | Lining code                           |   | BX-MO-FF   |
|  |   | Material                              |   | Molded Organic                                       |
|  |   | ****                                  | Primary or out-board                                      | 187x30.8x5.6 (7.4x1.2x.22) 211x34x4.5 (8.3x1.34x.18) |
|  |   | Size                                  | Secondary or in-board                                     | 187x30.8x5.6 (7.4x1.2x.22) 211x34x4.5 (8.3x1.34x.18) |
| Shoe thickness (no lining)   |   | 1.53 (.60) Nominal 1.89 (.74) Nominal |   |  |

\*Excludes rivet holes, grooves, chamfers, etc.

\*\*Includes rivet holes, grooves, chamfers, etc.

\*\*\*Total swept area for four brakes (Drum brake: Widest lining contact width for each brake x its contact circumference.)  
(Disc brake: Square of Outer Working Dia. minus Square of inner Working Dia. multiplied by Pi/2 for each brake.)

\*\*\*\*Size for drum brakes includes length x width x thickness.



# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

Sedans and Wagons  
(Except LX, GT, GT-TC  
& Base Models).

Base Models  
(All w/Fuel Saver Eng)

## Tires And Wheels (Standard)

|        |   |                     |   |                |
|--------|---|---------------------|---|----------------|
| Tires  | Size (load range, ply)                                      |                     | P165/80R13  | P175/80R13 BSW |
|        | Type (bias, radial, etc.)                                   |                     | Steel Belted Radial   |                |
|        | Inflation pressure (cold) for recommended max. vehicle load | Front (kPa (psi))   | 240 (35)  |                |
|        |   | Rear (kPa (psi))    | 240 (35)  |                |
|        | Rev./mile—at 70 km/h (45 mph)                               |                     | 540   |                |
| Wheels | Type & material   |                     | Disc - Semi Styled Steel Stamped  |                |
|        | Rim (size & flange type)                                    |                     | 13 x 4.5 JJ   |                |
|        | Wheel offset  |                     | 41.4 (1.63)   |                |
|        | Attachment  | Type (bolt or stud) | Stud  |                |
|        |   | Circle diameter     | 108 (4.25)  |                |
|        |   | Number & size       | Four - 12 mm  |                |
| Spare  | Tire and wheel (same, if other describe)                    |                     | P155/80D13 BSW 35 PSI 240 kPa 330 x 114.3 (13 x 4.5) - 41.4 (1.6) Offset - Temporal Spare |                |
|        | Storage position & location (describe)                      |                     | Flat Position, Deep Well in Trunk   |                |

## Tires And Wheels (Optional)

|  |  |   |
|--|--|---|
| Size (load range, ply)   |  | P165/80R13                                    |
| Type (bias, radial, etc.)  |  | Steel Belted Radial                           |
| Wheel (type & material)  |  | Disc. Styled Steel Stamped                    |
| Rim (size, flange type and offset)   |  | 13 x 5 JJ Offset 41.4 (1.63)                  |
| Size (load range, ply)   |  | P165/80R13                                    |
| Type (bias, radial, etc.)  |  | Steel Belted Radial                           |
| Wheel (type & material)  |  | Cast Aluminum                                 |
| Rim (size, flange type and offset)   |  | 13 x 5½ Offset 41.4 (1.63)                    |
| Size (load range, ply)   |  | P165/70R 365 TRX                              |
| Type (bias, radial, etc.)  |  | Steel Belted Radial                           |
| Wheel (type & material)  |  | Disc. Styled Steel Stamped                    |
| Rim (size, flange type and offset)   |  | 365 x 135 (14.3 x 5.3) TRX Offset 41.4 (1.63) |
| Size (load range, ply)   |  |   |
| Type (bias, radial, etc.)  |  |   |
| Wheel (type & material)  |  |   |
| Rim (size, flange type and offset)   |  |   |
| Spare tire and wheel<br>(if configuration is different than road tire or wheel, describe optional spare tire and/or wheel location & storage position) |  | No Optional Spare Tire or Wheel               |

## Brakes - Parking

|                                 |  |                                |
|---------------------------------|--|--------------------------------|
| Type of control                 |  | Hand Operated - Manual Release |
| Location of control             |  | Between Front Seats            |
| Operates on                     |  | Rear Service Brakes            |
| If separate from service brakes | Type (internal or external)              | -- --                          |
|                                 | Drum diameter                            | -- --                          |
|                                 | Lining size (length x width x thickness) | -- --                          |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

LX AND GT MODELS

TURBO-GT MODEL

## Tires And Wheels (Standard)

|               |   |                     |                           |                     |
|---------------|---|---------------------|---------------------------|---------------------|
| Tires         | Size (load range, ply)                                      |                     | P165/70R365               | P185/65R365 TRX BSW |
|               | Type (bias, radial, etc.)                                   |                     | Steel Belted Radial       |                     |
|               | Inflation pressure (cold) for recommended max. vehicle load | Front [kPa (psi)]   | 193 (28)                  |                     |
|               |   | Rear [kPa (psi)]    | 193 (28)                  |                     |
|               | Rev./mile—at 70 km/h (45 mph)                               |                     |                           |                     |
| Wheels        | Type & material   |                     | Styled Steel              | Cast Aluminum       |
|               | Rim (size & flange type)                                    |                     | 365 x 135 (14.3 x 5.3) TR |                     |
|               | Wheel offset  |                     | 41.4 (1.63)               |                     |
|               | Attachment  | Type (bolt or stud) | Stud                      |                     |
|               |   | Circle diameter     | 108 (4.25)                |                     |
| Number & size |   | Four - 12 mm        |                           |                     |
| Spare         | Tire and wheel (same, if other describe)                    |                     |                           |                     |
|               | Storage position & location (describe)                      |                     | (Same as Page 13)         |                     |

## Tires And Wheels (Optional)

|  |  |
|--|--|
| Size (load range, ply)   |  |
| Type (bias, radial, etc.)  |  |
| Wheel (type & material)  |  |
| Rim (size, flange type and offset)   |  |
| Size (load range, ply)   |  |
| Type (bias, radial, etc.)  |  |
| Wheel (type & material)  |  |
| Rim (size, flange type and offset)   |  |
| Size (load range, ply)   |  |
| Type (bias, radial, etc.)  |  |
| Wheel (type & material)  |  |
| Rim (size, flange type and offset)   |  |
| Size (load range, ply)   |  |
| Type (bias, radial, etc.)  |  |
| Wheel (type & material)  |  |
| Rim (size, flange type and offset)   |  |
| Spare tire and wheel<br>(if configuration is different than road tire or wheel, describe optional spare tire and/or wheel location & storage position) |  |

## Brakes - Parking

|                                 |  |                   |
|---------------------------------|--|-------------------|
| Type of control                 |  |                   |
| Location of control             |  |                   |
| Operates on                     |  |                   |
| If separate from service brakes | Type (internal or external)              | (Same as Page 13) |
|                                 | Drum diameter                            |                   |
|                                 | Lining size (length x width x thickness) |                   |

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

ALL MODELS

## Steering

|  |   |                                |   |                              |  |
|--|---|--------------------------------|---|------------------------------|--|
| Manual (std., opt., n.a.)                      |   |                                | Standard                                  |                              |  |
| Power (std., opt., n.a.)                       |   |                                | Optional                                  |                              |  |
| Adjustable steering wheel (tilt, swing, other) |   | Type and description           | Tilt 5 Position                           |                              |  |
|  |   | (Std., opt., n.a.)             | Optional                                  |                              |  |
| Wheel diameter                                 |   | Manual                         | 368 (14.5) With 6.4 (0.25) Offset         |                              |  |
|  |   | Power                          | 368 (14.5) With 6.4 (0.25) Offset         |                              |  |
| Turning diameter m (ft.)                       | Outside front                             | Wall to wall (l. & r.)         |   |                              |  |
|  |   | Curb to curb (l. & r.)         | 10.9 (35.7)                               |                              |  |
|  | Inside rear                               | Wall to wall (l. & r.)         |   |                              |  |
|  |   | Curb to curb (l. & r.)         |   |                              |  |
| Scrub Radius                                   |   |                                |   |                              |  |
| Manual   | Gear                                      | Type                           | Rack and Pinion                           |                              |  |
|  |   | Make                           | Cam Gear Ltd.                             |                              |  |
|  |   | Ratios                         | *   | 10.36° per mm of Rack Travel |  |
|  |   |                                | Overall                                   | 21.2:1 (On Center)           |  |
|  |   | No. wheel turns (stop to stop) |   | 3.5                          |  |
| Power  | Type (coaxial, linkage, etc.)             |                                | Integral Rack and Pinion                  |                              |  |
|  | Make                                      |                                | TRW Gear - Ford Pump, Fluid ESP-M2C138CJ  |                              |  |
|  | Gear                                      | Type                           | Rack and Pinion (Constant Ratio)          |                              |  |
|  |   | Ratios                         | *   | 8.94°/mm of Rack Travel      |  |
|  |   |                                | Overall                                   | 18.3:1 (On Center)           |  |
|  | Pump (drive)                              |                                | Belt Off Crankshaft Pulley                |                              |  |
| No. wheel turns (stop to stop)                 |   | 3.04                           |   |                              |  |
| Linkage  | Type                                      |                                | Integral with Gear                        |                              |  |
|  | Location (front or rear of wheels, other) |                                | Rear                                      |                              |  |
|  | Drag links (trans. or longit.)            |                                | N.A.                                      |                              |  |
|  | Tie rods (one or two)                     |                                | 2 Integral with Gear                      |                              |  |
| Steering axis                                  | Inclination at camber (deg.)              |                                | Left -- 14.64°, Right -- 15.09°           |                              |  |
|  | Bearings (type)                           | Upper                          | Shock Strut Shaft                         |                              |  |
|  |   | Lower                          | Ball Joint                                |                              |  |
|  |   | Thrust                         | N.A.                                      |                              |  |
| Steering spindle & joint type                  |   |                                | Cast Spindle Support w/Integral Strg. Arm |                              |  |
| Wheel spindle                                  | Diameter                                  | Inner bearing                  | 34.977 - 34.957 (1.38 - 1.376)            |                              |  |
|  |   | Outer bearing                  | 34.977 - 34.957 (1.38 - 1.376)            |                              |  |
|  | Thread (size)                             |                                | CV Joint Outer Race M20 x 1.5             |                              |  |
|  | Bearing (type)                            |                                | Non-Adjustable Tapered Roller             |                              |  |

\* Rack Speed

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type And/Or  
Engine Displacement

ALL MODELS

## Wheel Alignment

|                                |                          |                                 |  |
|--------------------------------|--------------------------|---------------------------------|--|
| Front wheel at curb mass (wt.) | Service checking         | Caster (deg.)                   | $+1.4^{\circ} \pm 0.75^{\circ}$ (a)  |
|                                |                          | Camber (deg.)                   | Left $2.15^{\circ} \pm 0.75^{\circ}$ ; Right $1.70^{\circ} \pm 0.75^{\circ}$ (b)   |
|                                |                          | Toe-in [outside track-mm (in.)] | $-2.5 \pm 3.0$ ( $-.10 \pm .12$ ) (c)  |
|                                | Service reset*           | Caster                          | $+1.4^{\circ} \pm 0.75^{\circ}$ (a)  |
|                                |                          | Camber                          | Left $+2.15^{\circ} \pm 0.75^{\circ}$ ; Right $+1.70^{\circ} \pm 0.75^{\circ}$ (b) |
|                                |                          | Toe-in                          | $-2.5 \pm 3.0$ ( $-.10 \pm .12$ ) (c)  |
|                                | Periodic M.V. inspection | Caster                          | $+1.4^{\circ} \pm 2.0^{\circ}$   |
|                                |                          | Camber                          | Left $+2.15^{\circ} \pm 2.0^{\circ}$ ; Right $+1.70^{\circ} \pm 2.0^{\circ}$       |
|                                |                          | Toe-in                          | $-2.5 \pm 6.0$ ( $-.10 \pm .25$ )  |
| Rear wheel at curb mass (wt.)  | Service checking         | Camber (deg.)                   | $-1.25 \pm .85$  |
|                                |                          | Toe-in [outside track-mm (in.)] | $+5.0 \pm 5.0$ (.18 $\pm$ .18)   |
|                                | Service reset*           | Camber                          | $-1.25^{\circ} \pm 0.85^{\circ}$   |
|                                |                          | Toe-in                          | $+5.0 \pm 5.0$ (.18 $\pm$ .18)   |
|                                | Periodic M.V. inspection | Camber                          | $-1.25^{\circ} \pm 2.0^{\circ}$  |
|                                |                          | Toe-in                          | $+5.0 \pm 6.0$ (.18 $\pm$ .25)   |

\* Indicates pre-set, adjustable, trend set or other.

## Electrical—Instruments and Equipment

|                           |  |  |
|---------------------------|--|--|
| Speedometer               | Type   | Pointer  |
|                           | Trip odometer (std., opt., n.a.)                 | Optional   |
| EGR maintenance indicator |  | None   |
| Charge indicator          | Type   | Warning Light  |
|                           | Warning device                                   | None   |
| Temperature indicator     | Type   | Engine Light (Oil & Temp.); Optional Temperature Gauge |
|                           | Warning device                                   | None   |
| Oil pressure indicator    | Type   | Engine Light (Oil & Temp.); Optional Oil Light         |
|                           | Warning device                                   | None   |
| Fuel indicator            | Type   | Gauge (45° Indicator)                                  |
|                           | Warning device                                   | Lo-Fuel Warning Light (Optional)                       |
| Windshield wiper          | Type (standard)                                  | Two Speed Electric (Column Mounted Control)            |
|                           | Type (optional)                                  | Interval Wipe (Column Mounted Control)                 |
|                           | Blade length                                     | 454 (18.0)   |
|                           | Swept area [cm <sup>2</sup> (in. <sup>2</sup> )] | 4683.2 (725)   |
| Windshield washer         | Type (standard)                                  | Electric Pump (Impeller Type)                          |
|                           | Type (optional)                                  | None   |
|                           | Fluid level indicator                            | Optional (Warning Light)                               |
| Horn                      | Type   | Air Electric   |
|                           | Number used                                      | One Hi-Pitch (Std.); One Lo-Pitch (Opt.)               |
| Other                     |  |  |

(a) Max. Side to Side Difference Not to Exceed  $0.75^{\circ}$

(b) Max. Side to Side (Left/Right) to be  $.45^{\circ} \pm 0.75^{\circ}$

(c) Steering Wheel Spokes (Clear Vision) Must Be Within  $\pm 10^{\circ}$  After Toe Setting

# MVMA Specifications Form Passenger Car

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

METRIC (U.S. Customary)

## SUPPLEMENTAL PAGE

---

### Electrical - Instruments and Equipment (Cont'd.):

- . Brake System Warning Light
- . Directional Turn Signal Lights
- . Emergency Flashers
- . Headlamp "ON" Warning Buzzer
- . Hi-Beam Indicator
- . Fasten Seat Belt Warning Light
- . Cigar Lighter
- . Fog Lamps
- . Graphic Display Module
- . Trip Odometer
- . Light w/Manual Transmission and Gasoline Engine Only (Not Available Canada or with 1.6 EFI Turbo engines)
- . Lift Gate Ajar Warning Light
- . Rear Washer/Wipe
- . Turbo Overboost Warning Light (Standard w/1.6L TC/EFI)

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/2V  
(97.6 CID)

1.6L HO/2V

1.6L/EFI

## Electrical – Supply System

|                         |                          |  |                  |
|-------------------------|--------------------------|--|------------------|
| Battery                 | Make                     | Motorcraft   |                  |
|                         | Model, std., (opt.)      | Standard   |                  |
|                         | Voltage                  | 12 Volt  |                  |
|                         | Amps at 0°F cold crank   | 310 (a); 380 (b); 410 (c)                              |                  |
|                         | Minutes-reserve capacity | 60 (a); 75 (b); 82 (c)                                 |                  |
|                         | Amp/hrs. - 20 hr. rate   | 36 (a); 45 (b), 48 (c)                                 |                  |
|                         | Location                 | Low-Silhouette-Mtd. in LH Apron Forward of Strut Tower |                  |
| Generator or alternator | Type and rating          | E4EF-CA (40 Amp)                                       | E4EF-DA (40 Amp) |
|                         | Ratio (alt. crank/rev.)  | 1.84:1 (a) (2.33:1 w/60 Amp)                           | 2.33:1 (a)       |
|                         | Optional (type & rating) | E1GF-CA (60 Amp) Incl. w/A/C                           |                  |
| Regulator               | Type                     | Electronic E4AF-AA                                     |                  |

## Electrical – Starting System

|              |                                   |              |
|--------------|-----------------------------------|--------------|
| Start, motor | Current drain at 0°F              | 255-275 Amps |
| Motor drive  | Engagement type                   | Positive     |
|              | Pinion engages from (front, rear) | Front        |

## Electrical – Ignition System

|             |                                    |                    |         |
|-------------|------------------------------------|--------------------|---------|
| Type        | Conventional (std., opt., n.a.)    | N.A.               |         |
|             | Electronic (std., opt., n.a.)      | Standard           |         |
|             | Other (specify)                    | N.A.               |         |
| Coil        | Make                               | Motorcraft         |         |
|             | Model                              | E1EF-AA            |         |
|             | Current                            | Engine stopped – A | 5.0     |
|             |                                    | Engine idling – A  | 2.5     |
| Spark plug  | Make                               | Motorcraft         |         |
|             | Model                              | AWSF-34            | AWSF-24 |
|             | Thread (mm)                        | 14                 |         |
|             | Tightening torque [N-m (lb., ft.)] | 10-20 (7-14)       |         |
|             | Gap                                | 1.12 (0.44)        |         |
|             | Number per cylinder                | One                |         |
| Distributor | Make                               | Motorcraft         |         |
|             | Model                              | Breakerless        |         |

## Electrical – Suppression

|                  |   |
|------------------|---|
| Locations & type | All Engines: Capacitor in Alternator, Resistor Spark Plugs, Resistance Ignition Wires<br>All 1.6L: Ground Strap Engine To Body<br>1.6 HO Capacitor at Ignition Coil |
|------------------|---|

(a) 1.6L 2V/1.6L HO/2V – Manual Transmission (Without Power Steering)

(b) 1.6L 2V/1.6L HO/2V – Manual Transmission (With Power Steering)

(c) 1.6L 2V HO – Automatic Transmission and All 1.6 EFI Applications

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Engine Description/Carb.  
Engine Code

1.6L/ TC/EFI  
(97.6 CID)

2.0L/Diesel  
(121 CID)

## Electrical – Supply System

|                               |                          |   |                                 |
|-------------------------------|--------------------------|---|---------------------------------|
| Battery                       | Make                     | Motorcraft  |                                 |
|                               | Model, std., (opt.)      | Standard  |                                 |
|                               | Voltage                  | 12 Volt   |                                 |
|                               | Amps at 0°F cold crank   | 410   | 1050                            |
|                               | Minutes-reserve capacity | 82  | 165                             |
|                               | Amp/hrs. - 20 hr. rate   | 48  | 100                             |
|                               | Location                 | Low-Silhouette - Mtd. in LH Apron<br>Forward of Strut Tower | Left Hand Rear of<br>Cargo Area |
| Generator<br>or<br>alternator | Type and rating          | E1GF-CA (60 Amp)  | E25F-BA (60 Amp)                |
|                               | Ratio (alt. crank/rev.)  | 2.33:1  | 2.36:1 (2.75:1 w/65 Amp)        |
|                               | Optional (type & rating) | E4EE-AA (65 Amp) Incl. w/A/C                                | F4EF-AA (65 Amp w/A/C)          |
| Regulator                     | Type                     | Electronic E4AF-AA  | E4EF-AB                         |

## Electrical – Starting System

|                |                                      |              |              |
|----------------|--------------------------------------|--------------|--------------|
| Start, motor   | Current drain at 0°F                 | 255-275 Amps | 500-520 Amps |
| Motor<br>drive | Engagement type                      | Positive     |              |
|                | Pinion engages<br>from (front, rear) | Front        |              |

## Electrical – Ignition System

(Not Applicable)

|               |                                    |                           |     |
|---------------|------------------------------------|---------------------------|-----|
| Type          | Conventional (std., opt., n.a.)    | N.A.                      |     |
|               | Electronic (std., opt., n.a.)      | Breakerless EFT, Standard |     |
|               | Other (specify)                    | N.A.                      |     |
| Coil          | Make                               | Motorcraft                |     |
|               | Model                              | 12029 E1EF-AA, E2EF-AA    |     |
|               | Current                            | Engine stopped - A        | 5.0 |
|               |                                    | Engine idling - A         | 2.5 |
| Spark<br>plug | Make                               | Motorcraft                |     |
|               | Model                              | AWSF-22C                  |     |
|               | Thread (mm)                        | 14                        |     |
|               | Tightening torque [N-m (lb., ft.)] | 10-20 (7-14)              |     |
|               | Gap                                | 1.12 (0.44)               |     |
|               | Number per cylinder                | One                       |     |
| Distributor   | Make                               | Motorcraft                |     |
|               | Model                              | Breakerless               |     |

## Electrical – Suppression

|                  |  |
|------------------|--|
| Locations & type | Capacitor in Alternator, Ground Strap Between Engine<br>Block and Fender Apron. Hood Bond.<br>1.6L TC/EFI - Resistor Spark Plugs and Resistance Ignition<br>Wires. |
|------------------|--|

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type

ALL MODELS

## Body – Miscellaneous Information

|   |   |   |
|---|---|---|
| Type of finish (lacquer, enamel, other)                         |   | Enamel (Acrylic)  |
| Hood  | Hinge location (front, rear)                  | Rear  |
|   | Type (counterbalance, prop)                   | Prop  |
|   | Release control (internal, external)          | Internal (Primary) Cable Release - External (Secondary) |
| Trunk lid   | Type (counterbalance, other)                  | N.A.  |
|   | Internal release control (elec., mech., n.a.) | N.A.  |
| Hatch-back lid  | Type (counterbalance, other)                  | Gas Struts  |
|   | Internal release control (elec., mech., n.a.) | Electrical  |
| Bumper front  | Bar material & mass, kg (weight, lbs.)        | 7029 Aluminum (Anodized) - 10.0 lb.                     |
|   | Reinforcement material & mass, kg (lbs.)      | Reinforcing Bracketry - 2.4 lb Man, 18.4 Auto.          |
| Bumper rear   | Bar material & mass, kg (weight, lbs.)        | HSLA 960 Steel - 18.3 lb./7029 Aluminum 10.0            |
|   | Reinforcement material & mass, kg. (lbs.)     | None  |
| Vent window control (crank, friction, pivot, power)             | Front   | Manual Latch (Option)                                   |
|   | Rear  | None  |
| Seat cushion type (e.g., 60/40, bucket, bench, wire, foam etc.) | Front   | Stamped Frame - Coil Springs & Flexolator - Foam Pad    |
|   | Rear  | Integral Frame & Foam Pad Assembly                      |
|   | 3rd seat                                      | None  |
| Seat back type (e.g., 60/40, bucket, bench, wire, foam etc.)    | Front   | Stamped Frame - Foam Pad                                |
|   | Rear  | Plastic Load Floor - Foam Pad Assy, Fold-Down Type      |
|   | 3rd seat                                      | None  |
| Vehicle identification no. location                             |   | Cowl Top Inner Panel - L.H.                             |

## Frame

|   |                       |
|---|-----------------------|
| Type and description (separate frame, unitized frame, partially-unitized frame) | Unitized Construction |
|---|-----------------------|

| Glass   |      | SEDAN             | STATION WAGON    |
|---|------|-------------------|------------------|
| Backlight slope angle (deg.)  | H121 | 62°               | 34°              |
| Windshield slope angle (deg.)   | H122 | 55.0°             |                  |
| Tumble-Home (deg.)  | W122 | 20.5°             |                  |
| Windshield glass exposed surface area [cm <sup>2</sup> (in. <sup>2</sup> )]           | S1   | 6939.2 (1075.6)   |                  |
| Side glass exposed surface area [cm <sup>2</sup> (in. <sup>2</sup> )] - total 2-sides | S2   | 10770.5 (1670.6)  | 14500.8 (2247.6) |
| Backlight glass exposed surface area [cm <sup>2</sup> (in. <sup>2</sup> )]            | S3   | 7680.6 (1190.5)   | 4977.4 (771.5)   |
| Total glass exposed surface area [cm <sup>2</sup> (in. <sup>2</sup> )]                | S4   | 25390.3 (3936.7)  | 26417.5 (4094.7) |
| Windshield glass (type)   |      | LAMINATED         |                  |
| Side glass (type)   |      | TEMPERED - Safety |                  |
| Backlight glass (type)  |      | TEMPERED          |                  |



**MVMA Specifications Form**  
**Passenger Car**  
**METRIC (U.S. Customary)**

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

**Body Type**

ALL MODELS

**Restraint System**

|                         |                      |   |                 |
|-------------------------|----------------------|---|-----------------|
| Active restraint system | Standard/optional    | Standard - Color Keyed Webbing - Rear<br>Standard - Color Keyed Webbing with Tension Eliminator - Front |                 |
|                         | Type and description | Continuous Loop - Front   | Lap Only - Rear |
|                         | Location             | 2 Seat Belts - Front  | 2 - Rear        |
| Passive seat belts      | Standard/optional    | N.A.  |                 |
|                         | Power/manual         | N.A.  |                 |
|                         | 2 or 3 point         | N.A.  |                 |
|                         | Knee bar/lap belt    | N.A.  |                 |

**MVMA Specifications Form**  
**Passenger Car**  
**METRIC (U.S. Customary)**

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

Body Type

ALL MODELS

**Convenience Equipment (standard, optional, n.a.)**

|   |  |   |
|---|--|---|
| Air conditioning (manual, auto. temp control) |  | Optional, Manual Temperature Control                  |
| Clock (digital, analog)                       |  | Optional, Digital                                     |
| Compass / thermometer                         |  | N.A.  |
| Console (floor, overhead)                     |  | Optional, Floor/Optional, Overhead                    |
| Defroster, elec. backlight                    |  | Optional (Mandatory in New York State)                |
| Electronic                                    | Diagnostic warning (integrated, individual)  | N.A.  |
|   | Instrument cluster (list instruments)  | N.A.  |
|   | Keyless entry  | N.A.  |
|   | Tripminder (avg. spd., fuel)   | N.A.  |
|   | Voice alert (list items)   | N.A.  |
|   | Other <u>Headlamp Buzzer</u>   | Optional, Warning                                     |
| <u>Graphic Display Warning</u>                |  | Optional, Indicator                                   |
| Fuel door lock (remote, key, electric)        |  | Optional, Electric                                    |
| Lamps   | Auto head on / off delay, dimming  | N.A.  |
|   | Cornering  | N.A.  |
|   | Courtesy (map, reading)  | Optional  |
|   | Door lock, ignition  | N.A.  |
|   | Engine compartment   | Optional  |
|   | Fog  | Optional  |
|   | Glove compartment  | Optional  |
|   | Trunk / <u>Cargo</u>   | Optional  |
|   | Other  |   |
| Mirrors                                       | Day/night (auto. man.)   | N.A.  |
|   | L.H. (remote, power, heated)   | Optional, Remote                                      |
|   | R. H. (convex, remote, power, heated)  | Optional, Remote Convex                               |
|   | Visor vanity (RH / LH, illuminated)  | Optional, LH (Not Illuminated)/RH (Illuminated)       |
| Parking brake-auto release (warning light)    |  | N.A.  |
| Power equipment                               | Door locks / deck lid - specify  | Optional, Door Locks/Decklid                          |
|   | Seat (2-4-6 way) heated (driver, pass, other) lumbar, hip, thigh support (power, manual) reclining (driver, pass) memory (1-2 preset, recline) | N.A.  |
|   | Side windows   | N.A.  |
|   | Vent windows   | N.A.  |
|   | Rear window  | N.A.  |
| Radio systems                                 | Antenna (location, whip, w/shield, power)  | Whip - Right Hand Fender                              |
|   | AM, FM, stereo, tape, CB   | (a)   |
|   | Speaker (number, location) Premium sound   | Optional, Amp. w/Frt. Door Speakers and Rear Speakers |
| Roof open air/fixed (flip-up, sliding, "T")   |  | Optional, Flip-Up/Open Air                            |
| Speed control device                          |  | Optional  |
| Speed warning device (light, buzzer, etc.)    |  | N.A.  |
| Tachometer (rpm)                              |  | 6000 (Diesel); 7000 (Gasoline)                        |
| Theft protection-type                         |  | N.A.  |

(a) AM Radio Optional on Base Vehicle, Standard on High Series Models.  
 Optional Radios: AM/FM Stereo, AM/FM Stereo w/Cassette, Electronic AM/FM Stereo Search w/Cassette, Graphic Equalizer

# MVMA Specifications Form

## Passenger Car

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

Car Line ESCORT

Model Year 1985

Issued 9/84

Revised (•) \_\_\_\_\_

All dimensions to ground are for comparative purposes only. Dimensions are to be shown for all base body models of each car line.  
SAE Ref. no. refers to the definition published in SAE Recommended Practice J1100a "Motor Vehicle Dimensions," unless otherwise specified.

| Body Type | SAE Ref. No. | 2-DOOR (61D)<br>HATCHBACK | 4-DOOR (58D)<br>HATCHBACK | 4-DOOR (74D)<br>WAGON |
|-----------|--------------|---------------------------|---------------------------|-----------------------|
|-----------|--------------|---------------------------|---------------------------|-----------------------|

### Width

|                                  |      |              |              |  |
|----------------------------------|------|--------------|--------------|--|
| Tread (front)                    | W101 | 1390 (54.7)  |              |  |
| Tread (rear)                     | W102 | 1422 (56.0)  |              |  |
| Vehicle width                    | W103 | 1673 (65.9)  |              |  |
| Body width at Sg RP (front)      | W117 | 1601 (63.0)  |              |  |
| Vehicle width (front doors open) | W120 | 3662 (144.2) | 3186 (125.4) |  |
| Vehicle width (rear doors open)  | W121 | - -          | 3049 (120.0) |  |

### Length

|                               |      |              |  |              |
|-------------------------------|------|--------------|--|--------------|
| Wheelbase                     | L101 | 2393 (94.2)  |  |              |
| Vehicle length                | L103 | 4236 (166.8) |  | 4267 (168.0) |
| Overhang (front)              | L104 | 899.2 (35.4) |  |              |
| Overhang (rear)               | L105 | 947 (37.3)   |  | 976 (38.4)   |
| Upper structure length        | L123 | 2681 (105.6) |  | 2809 (110.6) |
| Rear wheel C/L "X" coordinate | L127 | 2166 (85.3)  |  |              |
| Cowl point "X" coordinate     | L125 | 2187 (86.1)  |  |              |

### Height\*

|                                     |         |             |            |            |
|-------------------------------------|---------|-------------|------------|------------|
| Passenger distribution (frt./rear)  | PD1,2,3 | 2/1         |            |            |
| Trunk/cargo load                    |         | 0           |            |            |
| Vehicle height                      | H101    | 1353 (53.3) |            |            |
| Cowl point to ground                | H114    | 914 (36.0)  | 917 (36.1) | 916 (36.1) |
| Deck point to ground                | H138    | 896 (35.3)  | 904 (35.6) | 835 (32.9) |
| Rocker panel-front to ground        | H112    | 198 (7.8)   | 201 (7.9)  | 200 (7.9)  |
| Bottom of door closed-front to grd. | H133    | 270 (10.6)  | 276 (10.9) | 269 (10.6) |
| Rocker panel-rear to ground         | H111    | 189.5 (7.5) | 196 (7.7)  | 186 (7.3)  |
| Bottom of door closed-rear to grd.  | H135    | - -         | 277 (10.9) | 267 (10.5) |

### Ground Clearance\*

|   |      |                        |               |               |
|---|------|------------------------|---------------|---------------|
| Front bumper to ground                      | H102 | 368 (14.5)             | 369 (14.5)    | 374 (14.7)    |
| Rear bumper to ground                       | H104 | 315 (12.4)             | 323 (12.7)    | 305 (12.0)    |
| Bumper to ground (front at curb mass (wt.)) | H103 | 387 (15.2)             |               |               |
| Bumper to ground (rear at curb mass (wt.))  | H105 | 388 (15.3)             |               |               |
| Angle of approach (degrees)                 | H106 | 22.2°                  |               | 22.6°         |
| Angle of departure (degrees)                | H107 | 20.5°                  | 21.0°         | 19.3°         |
| Ramp breakover angle (degrees)              | H147 | 13.7°                  | 14.1°         | 13.6°         |
| Rear axle differential to ground            | H153 | - -                    |               |               |
| Min. running ground clearance               | H156 | 126 (5.0) (a)          | 130 (5.1) (b) | 120 (4.7) (a) |
| Location of min. run. grd. clear.           |      | Exhaust System (a) (b) |               |               |

\* All vehicle height and ground clearances are made at the Manufacturer's Design Load Weight, unless otherwise specified.

Manufacturers Design Load Weight is defined with indicated passenger distribution and trunk/cargo load.

(a) At 4175 Longitudinal Coordinate

(b) At 2940 Longitudinal Coordinate

**MVMA Specifications Form****Passenger Car****METRIC (U.S. Customary)****Car and Body Dimensions** See Key Sheets for definitionsCar Line ESCORTModel Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_**Body Type**

| SAE<br>Ref.<br>No. | 2-DOOR (61D)<br>HATCHBACK | 4-DOOR (58D)<br>HATCHBACK | 4-DOOR (74D)<br>WAGON |
|--------------------|---------------------------|---------------------------|-----------------------|
|--------------------|---------------------------|---------------------------|-----------------------|

**Front Compartment**

|                                  |     |             |             |             |
|----------------------------------|-----|-------------|-------------|-------------|
| Sg RP front, "X" coordinate      | L31 | 3104 (43.4) |             |             |
| Effective head room              | H61 | 967 (38.1)  |             |             |
| Max. eff. leg room (accelerator) | L34 | 1055 (41.5) |             |             |
| Sg RP (front to heel)            | H30 | 260 (10.2)  |             |             |
| Design H-point front travel      | L17 | 180 (7.1)   |             |             |
| Shoulder room                    | W3  | 1305 (51.4) |             |             |
| Hip room                         | W5  | 1318 (51.9) |             |             |
| Upper body opening to ground     | H50 | 1240 (48.8) | 1245 (49.0) | 1238 (48.8) |
| Steering wheel angle             | H18 | 26.3°       |             |             |
| Back angle                       | L40 | 24.0°       |             |             |

**Rear Compartment**

|                              |     |             |             |             |
|------------------------------|-----|-------------|-------------|-------------|
| Sg RP Point couple distance  | L50 | 751 (29.6)  |             |             |
| Effective head room          | H63 | 950 (37.4)  |             | 970 (38.2)  |
| Min. effective leg room      | L51 | 890 (35.0)  |             |             |
| Sg RP (second to heel)       | H31 | 303 (11.9)  |             |             |
| Knee clearance               | L48 | 29 (1.1)    |             |             |
| Compartment room             | L3  |             |             |             |
| Shoulder room                | W4  | 1312 (51.6) | 1306 (51.4) |             |
| Hip room                     | W6  | 1121 (44.1) | 1127 (44.4) |             |
| Upper body opening to ground | H51 |             | 1249 (49.2) | 1240 (48.8) |
| Back angle                   | L41 |             |             |             |

**Luggage Compartment**

|                                       |      |            |            |  |
|---------------------------------------|------|------------|------------|--|
| Usable luggage capacity [L (cu. ft.)] | V1   | N.A.       |            |  |
| Liftover height                       | H195 | 793 (31.2) | 801 (31.5) |  |

**Interior Volumes (EPA Classification)**

|                                 |   |         |       |                     |
|---------------------------------|---|---------|-------|---------------------|
| Vehicle class                   |   | COMPACT |       | SMALL STATION WAGON |
| Interior volume index (cu. ft.) | * | 101.8   | 101.7 | 86.0                |
| Trunk/cargo index (cu. ft.)     |   | 16.6    | 16.5  | 28.0                |

(\*) Includes Trunk Cargo Index

**MVMA Specifications Form****Passenger Car****METRIC (U.S. Customary)****Car and Body Dimensions** See Key Sheets for definitions

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

**Body Type**

| SAE<br>Ref.<br>No. | 2-DOOR (61D)<br>HATCHBACK | 4-DOOR (58D)<br>HATCHBACK | 4-DOOR (74D)<br>WAGON |
|--------------------|---------------------------|---------------------------|-----------------------|
|--------------------|---------------------------|---------------------------|-----------------------|

**Station Wagon – Third Seat**

(NOT APPLICABLE)

|                             |     |  |
|-----------------------------|-----|--|
| Shoulder room               | W85 |  |
| Hip room                    | W86 |  |
| Effective leg room          | L86 |  |
| Effective head room         | H86 |  |
| Effective T-point head room | H89 |  |
| Seat facing direction       | SD1 |  |
| Back angle                  | L88 |  |

**Station Wagon – Cargo Space**

|  |      |     |             |
|--|------|-----|-------------|
| Cargo length (open front)                                | L200 | - - | - -         |
| Cargo length (open second)                               | L201 | - - | - -         |
| Cargo length (closed front)                              | L202 | - - | 1548 (60.9) |
| Cargo length (closed second)                             | L203 | - - | 873 (34.4)  |
| Cargo length at belt (front)                             | L204 | - - | 1429 (56.2) |
| Cargo length at belt (second)                            | L205 | - - | 681 (26.8)  |
| Cargo width (wheelhouse)                                 | W201 | - - | 908 (35.7)  |
| Rear opening width at floor                              | W203 | - - | 1042 (41.0) |
| Opening width at belt                                    | W204 | - - |             |
| Max. rear opening width above belt                       | W205 | - - |             |
| Cargo height   | H201 | - - | 891 (35.1)  |
| Rear opening height                                      | H202 | - - | 793 (31.2)  |
| Tailgate to ground height                                | H250 | - - |             |
| Front seat back to load floor height                     | H197 | - - | 564 (22.2)  |
| Cargo volume index [m <sup>3</sup> (ft. <sup>3</sup> )]  | V2   | - - | 1.68 (58.7) |
| Hidden cargo volume [m <sup>3</sup> (ft. <sup>3</sup> )] | V4   | - - |             |
| Cargo volume, index-rear of 2-seat                       | V10  | - - | .79 (27.8)  |

**Hatchback – Cargo Space**

|  |      |              |             |
|--|------|--------------|-------------|
| Front seat back to load floor height                     | H197 | 566.5 (22.3) | - -         |
| Cargo length at front seat back height                   | L208 | 989 (38.9)   | - -         |
| Cargo length at floor (front)                            | L209 | 1466 (57.7)  | - -         |
| Cargo volume index [m <sup>3</sup> (ft. <sup>3</sup> )]  | V3   | 1.07 (37.6)  | 1.06 (37.4) |
| Hidden cargo volume [m <sup>3</sup> (ft. <sup>3</sup> )] | V4   |              | - -         |
| Cargo volume index-rear of 2-seat                        | V11  | 0.47 (16.6)  | 0.47 (16.5) |

**Aerodynamics\***

|   |                           |                           |
|---|---------------------------|---------------------------|
| Wheel lip to ground, front                        | 622.3 (24.5)              |                           |
| Wheel lip to ground, rear                         | 599.4 (23.6)              |                           |
| Frontal area [m <sup>2</sup> (ft. <sup>2</sup> )] | 19.9 ft. <sup>2</sup> (a) | 20.1 ft. <sup>2</sup> (a) |
| Drag coefficient (Cd)                             | 0.39                      | 0.38                      |

\* Describe measurement method.

(a) Includes two outside mirrors

**MVMA Specifications Form**  
**Passenger Car**  
**METRIC (U.S. Customary)**

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

**Body Type**

2-DOOR HATCHBACK

4-DOOR HATCHBACK  
 4-DOOR STATION WAGON

**Vehicle Fiducial Marks**

| Fiducial Mark Number* |      | Define Coordinate Location   |              |
|-----------------------|------|--|--------------|
| 1 & 2<br>Front        |      | The rear vertical edge of the master control notch on the underside of the front door rocker panels locates the " <u>X</u> " coordinate relative to body grid.   |              |
|                       |      | X = 2535 (99.8)<br>Y = 721 (28.4)<br>Z = 486 (19.1)  |              |
| 3 & 4<br>Rear         |      | The intersection of the horizontal-vertical surfaces on the rocker panel door rabbet locates the " <u>Y</u> " and " <u>Z</u> " coordinates relative to body grid at particular fore-aft inch lines. The fore-aft location can be determined by the reference dimension from - Fiducial Mark 1 & 2. |              |
|                       |      |  |              |
| Front                 | W21  | 721 (28.3)   |              |
|                       | L54  | 2535 (99.8)  |              |
|                       | H81  | 485 (19.1)   |              |
|                       | H161 | - - - -  |              |
|                       | H163 | - - - -  |              |
| Rear                  | W22  | 721 (28.4)   | 721 (28.4)   |
|                       | L55  | 3300 (129.9)   | 3600 (141.7) |
|                       | H82  | 479 (18.9)   | 473 (18.7)   |
|                       | H162 | - - - -  | - - - -      |
|                       | H164 | - - - -  | - - - -      |

\* Reference - SAE Recommended Practice, J182a, Motor Vehicle Fiducial Marks - September, 1973.  
 All linear dimensions are in millimeters (inches).

**MVMA Specifications Form**  
**Passenger Car**  
**METRIC (U.S. Customary)**

Car Line ESCORT  
 Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

Body Type

|                    |            |
|--------------------|------------|
| SAE<br>Ref.<br>No. | ALL MODELS |
|--------------------|------------|

**Lamps and Headlamp Shape\***

SEDAN

STATION WAGON

|   |                 |           |                                   |              |
|---|-----------------|-----------|-----------------------------------|--------------|
| Height above ground to center of bulb or marker | Headlamp (H127) | Highest** | 954.0 (36.6)                      |              |
|   |                 | Lowest    | - -                               |              |
|   | Taillamp (H128) | Highest** | 643.2 (25.3)                      | 632.0 (24.9) |
|   |                 | Lowest    | 643.2 (25.3)                      | 632.0 (24.9) |
|   | Sidemarker      | Front     | 668.3 (26.3)                      |              |
|   |                 | Rear      | 643.2 (25.3)                      | 632.0 (24.9) |
| Distance from C/L of car to center of bulb      | Headlamp        | Inside    | - -                               |              |
|   |                 | Outside** | 996.0 (39.2)                      |              |
|   | Taillamp        | Inside    | 659.0 (25.9)                      | 693.0 (27.3) |
|   |                 | Outside** | 659.0 (25.9)                      | 693.0 (27.3) |
|   | Directional     | Front     | 677.8 (26.7)                      |              |
|   |                 | Rear      | 476.5 (18.7)                      | 693.0 (27.3) |
| Headlamp shape                                  |                 |           | Rectangular - Single Halogen Type |              |

\* Measured at curb mass (weight).

\*\* If single lamps are used enter here.

**METRIC (U.S. Customary)**

Model Year 1985

Issued 9/84

Revised (●)

\* Reference—SAE J1100a, Motor vehicle dimensions, curb weight definition.

\*\* Shipping mass (weight) definition – **Less Engine Coolant and Fuel**



# MVMA Specifications Form Passenger Car

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

METRIC (U.S. Customary)

## Optional Equipment Differential Mass (weight)\*

| Equipment               | MASS, kg. (weight, lb.) |      |       | Remarks |
|-------------------------|-------------------------|------|-------|---------|
|                         | Front                   | Rear | Total |         |
| ENGINES:                |                         |      |       |         |
| Fuel Saver              | -0.5                    | 0    | -0.5  |         |
| 1.6L FS/2V              | (-1)                    | (0)  | (-1)  |         |
| 1.6L/EFI                | 1.8                     | 0    | 1.8   |         |
|                         | (4)                     | (0)  | (4)   |         |
| 1.6L HQ/2V              | 1.8                     | 0    | 1.8   |         |
|                         | (4)                     | (0)  | (4)   |         |
| 2.0L/Diesel             | 59.4                    | 44.9 | 104.3 |         |
|                         | (131)                   | (99) | (230) |         |
| Fuel Saver              | 59.9                    | 40.4 | 100.3 |         |
| 2.0L FS/Diesel          | (132)                   | (89) | (221) |         |
| EMISSION SYSTEMS:       |                         |      |       |         |
| High Altitude           | 0.5                     | 0    | 0.5   |         |
|                         | (1)                     | (0)  | (1)   |         |
| California              | 0.5                     | 0    | 0.5   |         |
|                         | (1)                     | (0)  | (1)   |         |
| Canada                  | -7.3                    | -0.9 | -8.2  |         |
|                         | (-16)                   | (-2) | (-18) |         |
| TRANSAXLES:             |                         |      |       |         |
| Manual 5-Speed          | 5.4                     | -0.9 | 4.5   |         |
|                         | (12)                    | (-2) | (10)  |         |
| Automatic               | 42.2                    | -4.1 | 38.1  |         |
|                         | 93                      | (-9) | (84)  |         |
| TIRES:                  |                         |      |       |         |
| P165/80R13 WSW          | 0.5                     | 0.5  | 1.0   |         |
|                         | (1)                     | (1)  | (2)   |         |
| P185/65R365 TRX         | 1.8                     | 1.4  | 3.2   |         |
|                         | (4)                     | (3)  | (7)   |         |
| MISCELLANEOUS OPTIONS:  |                         |      |       |         |
| Air Conditioner(Manual) | 21.3                    | 0    | 21.3  |         |
|                         | (47)                    | (0)  | (47)  |         |

\*Also see Engine - General Section for dressed engine mass (weight).

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (●) \_\_\_\_\_

|  | Optional Equipment Differential Mass (weight)* |              |              |         |
|--|--|--------------|--------------|---------|
| Equipment                                  | MASS, kg. (weight, lb.)                        |              |              | Remarks |
|  | Front  | Rear         | Total        |         |
| MISCELLANEOUS OPTIONS:<br>(continued)      |  |              |              |         |
| Radiator Assy.(1.49 THK<br>13 FPI) 1.5 x 8 | 2.7<br>(6)                                     | 0<br>(0)     | 2.7<br>(6)   |         |
| Radiator Assy.(1.49 THK<br>10 FPI) 1.7 x 8 | 2.3<br>(5)                                     | 0<br>(0)     | 2.3<br>(5)   |         |
| Radio - AM                                 | 1.8<br>(4)                                     | 1.4<br>(3)   | 3.2<br>(7)   |         |
| Radio - AM Delete                          | -1.4<br>(-3)                                   | -0.5<br>(-1) | -1.8<br>(-4) |         |
| Radio - AM/FM Monaural                     | 1.8<br>(4)                                     | 0.5<br>(1)   | 2.3<br>(5)   |         |
| Radio - AM/FM MPX                          | 1.8<br>(4)                                     | 2.3<br>(5)   | 4.1<br>(9)   |         |
| Radio -AM/FM MPX<br>Cassette               | 2.7<br>(6)                                     | 1.4<br>(3)   | 4.1<br>(9)   |         |
| Premium Sound                              | 1.8<br>(4)                                     | 0.5<br>(1)   | 2.3<br>(5)   |         |
| Sound System - Graphic<br>Equalizer        | 2.7<br>(6)                                     | 1.4<br>(3)   | 4.1<br>(9)   |         |
| Roof, Flip-Up Sun                          | 2.7<br>(6)                                     | 6.8<br>(15)  | 9.5<br>(21)  |         |
| Speed Control                              | 1.8<br>(4)                                     | 0<br>(0)     | 1.8<br>(4)   |         |
| Steering, Power                            | 6.8<br>(15)                                    | 0.9<br>(2)   | 7.7<br>(17)  |         |
| Suspension, Handling                       | 0.9<br>(2)                                     | 0<br>(0)     | 0.9<br>(2)   |         |
| Suspension, TRX Rallye                     | 1.8<br>(4)                                     | 0.5<br>(1)   | 2.3<br>(5)   |         |
| Suspension, Heavy Duty<br>Fleet            | 1.4<br>(3)                                     | 0.9<br>(2)   | 2.3<br>(5)   |         |

\*Also see Engine - General Section for dressed engine mass (weight).

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT  
Model Year 1985 Issued 9/84 Revised (•) \_\_\_\_\_

|                                       | Optional Equipment Differential Mass (weight)* |              |             |                    |
|---------------------------------------|--|--------------|-------------|--------------------|
| Equipment                             | MASS, kg. (weight, lb.)                        |              |             | Remarks            |
|                                       | Front  | Rear         | Total       |                    |
| MISCELLANEOUS OPTIONS:<br>(continued) |  |              |             |                    |
| Seats, Manual Recliner<br>(Special)   | 2.7<br>(6)                                     | 3.2<br>(7)   | 5.9<br>(13) |                    |
|                                       |  |              |             |                    |
| Seats, Lo-Back Recliner<br>(Manual)   | 1.4<br>(3)                                     | 2.3<br>(5)   | 3.7<br>(8)  |                    |
|                                       |  |              |             |                    |
| Wheels - Styled Steel<br>4Y Design    | 2.3<br>(6)                                     | 2.3<br>(6)   | 4.6<br>(12) |                    |
|                                       |  |              |             |                    |
| Wheels - Wide Aluminum<br>Spoke, TRX  | 1.8<br>(4)                                     | 2.3<br>(5)   | 4.1<br>(9)  |                    |
|                                       |  |              |             |                    |
| Brakes, Power Disc                    | 1.4<br>(3)                                     | 0.5<br>(1)   | 1.9<br>(4)  |                    |
|                                       |  |              |             |                    |
| Battery Heavy Duty<br>(45 Amp)        | 3.6<br>(8)                                     | -0.5<br>(-1) | 3.1<br>(7)  |                    |
|                                       |  |              |             |                    |
| Steering Column -<br>Tilt             | 1.8<br>(4)                                     | 0.9<br>(2)   | 2.7<br>(6)  |                    |
|                                       |  |              |             |                    |
| Clock - Digital Header<br>Mounted     | 0.5<br>(1)                                     | 0.5<br>(1)   | 1.0<br>(2)  |                    |
|                                       |  |              |             |                    |
| Tachometer Instrumenta-<br>tion Group | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)  |                    |
|                                       |  |              |             |                    |
| Engine Heater Immersion-<br>Grounded  | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)  |                    |
|                                       |  |              |             |                    |
| Luggage Rack                          | 1.0<br>(2)                                     | 4.5<br>(10)  | 5.5<br>(12) | Station Wagon Only |
|                                       |  |              |             |                    |
| Console                               | 1.4<br>(3)                                     | 0.9<br>(2)   | 2.3<br>(5)  |                    |
|                                       |  |              |             |                    |
| Armrest - Folding                     | 1.8<br>(4)                                     | 1.4<br>(3)   | 3.2<br>(7)  |                    |
|                                       |  |              |             |                    |
| Rear Window Defroster -<br>Electric   | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)  |                    |
|                                       |  |              |             |                    |
| Window - Man. Pivoting<br>Front Vent  | 1.4<br>(3)                                     | 0.5<br>(1)   | 1.9<br>(4)  |                    |
|                                       |  |              |             |                    |
|                                       |  |              |             |                    |

\*Also see Engine - General Section for dressed engine mass (weight).

# MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line ESCORT

Model Year 1985

Issued 9/84

Revised (●) \_\_\_\_\_

|                                       | Optional Equipment Differential Mass (weight)* |      |       |         |
|---------------------------------------|--|------|-------|---------|
| Equipment                             | MASS, kg. (weight, lb.)                        |      |       | Remarks |
|                                       | Front  | Rear | Total |         |
| MISCELLANEOUS OPTIONS:<br>(continued) |  |      |       |         |
| Mirror, L.H. Racing                   | 0.5  | 0.5  | 1.0   |         |
| Remote Control                        | (1)  | (1)  | (2)   |         |
|                                       |  |      |       |         |
| Mirrors, L.H. & R.H.                  | 1.0  | 0    | 1.0   |         |
| Racing Remote                         | (2)  | (0)  | (2)   |         |
|                                       |  |      |       |         |
| Mirror - R.H. Convex                  | 0.5  | 0.5  | 1.0   |         |
| Non-Racing                            | (1)  | (1)  | (2)   |         |
|                                       |  |      |       |         |
| Tinted Glass - Complete               | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
| Tinted Glass -<br>Windshield          | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
| Windshield Wipers,<br>Interval        | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
| Wiper/Washer, Rear                    | -1.4   | 7.3  | 5.9   |         |
|                                       | (-3)   | (16) | (13)  |         |
|                                       |  |      |       |         |
| Protection - Road<br>Abrasion         | 0.5  | 0.5  | 1.0   |         |
|                                       | (1)  | (1)  | (2)   |         |
|                                       |  |      |       |         |
| Appearance Protection<br>Group        | 0.5  | 0.5  | 1.0   |         |
|                                       | (1)  | (1)  | (2)   |         |
|                                       |  |      |       |         |
| Bumper Rub Strips<br>Front & Rear     | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
| Accent Stripe                         | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
| Exterior Moulding<br>Bodyside         | 0.5  | 0.5  | 1.0   |         |
|                                       | (1)  | (1)  | (2)   |         |
|                                       |  |      |       |         |
| Sports Group - 1.6L                   | 15.0   | 26.3 | 41.3  |         |
|                                       | (33)   | (58) | (1)   |         |
|                                       |  |      |       |         |
| Sports Group - 1.6L                   | 24.9   | 43.1 | 68.0  |         |
|                                       | (55)   | (95) | (150) |         |
|                                       |  |      |       |         |
| Bumper Guards - Front                 | 0.5  | 0    | 0.5   |         |
|                                       | (1)  | (0)  | (1)   |         |
|                                       |  |      |       |         |
|                                       |  |      |       |         |

\*Also see Engine - General Section for dressed engine mass (weight).

# MVMA Specifications Form Passenger Car

Car Line ESCORT

Model Year 1985

Issued 9/84

Revised (●) \_\_\_\_\_

METRIC (U.S. Customary)

|                                       | Optional Equipment Differential Mass (weight)* |              |               |         |
|---------------------------------------|--|--------------|---------------|---------|
| Equipment                             | MASS, kg. (weight, lb.)                        |              |               | Remarks |
|                                       | Front  | Rear         | Total         |         |
| MISCELLANEOUS OPTIONS:<br>(continued) |  |              |               |         |
| Bumper Guards - Rear                  | 0<br>(0)                                       | 0.5<br>(1)   | 0.5<br>(1)    |         |
| Bumper Guards - Fleet<br>Front & Rear | 0.5<br>(1)                                     | 0.5<br>(1)   | 1.0<br>(2)    |         |
| Door Locks - Power                    | 1.8<br>(4)                                     | 0<br>(0)     | 1.8<br>(4)    |         |
| Light Shift Indicator                 | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)    |         |
| French Label - Quebec                 | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)    |         |
| Speedometer - Kilos                   | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)    |         |
| Body, Tu-Tone Paint                   | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)    |         |
| License Plate Bracket -<br>Front      | 0.5<br>(1)                                     | 0<br>(0)     | 0.5<br>(1)    |         |
| Styled Wheel - White<br>TRX           | 10.9<br>(24)                                   | 10.4<br>(23) | 21.3<br>(47)  |         |
| Trim Rings                            | 0.5<br>(1)                                     | 0.5<br>(1)   | 1.0<br>(2)    |         |
| Station Wagon Decor                   | 0.9<br>(2)                                     | 1.4<br>(3)   | 2.3<br>(5)    |         |
| Sports Group "GT"<br>1.6L TC          | 27.2<br>(60)                                   | 36.3<br>(80) | 63.5<br>(140) |         |
| Decor Group - GL                      | 14.5<br>(32)                                   | 16.3<br>(36) | 30.8<br>(68)  |         |
| Decor Group - LX                      | 27.2<br>(60)                                   | 27.2<br>(60) | 54.4<br>(120) |         |
|                                       |  |              |               |         |
|                                       |  |              |               |         |
|                                       |  |              |               |         |
|                                       |  |              |               |         |

\*Also see Engine - General Section for dressed engine mass (weight).


# MVMA Specifications Form

## Passenger Car


### METRIC (U.S. Customary)

#### Exterior Car And Body Dimensions – Key Sheet


#### Exterior Width

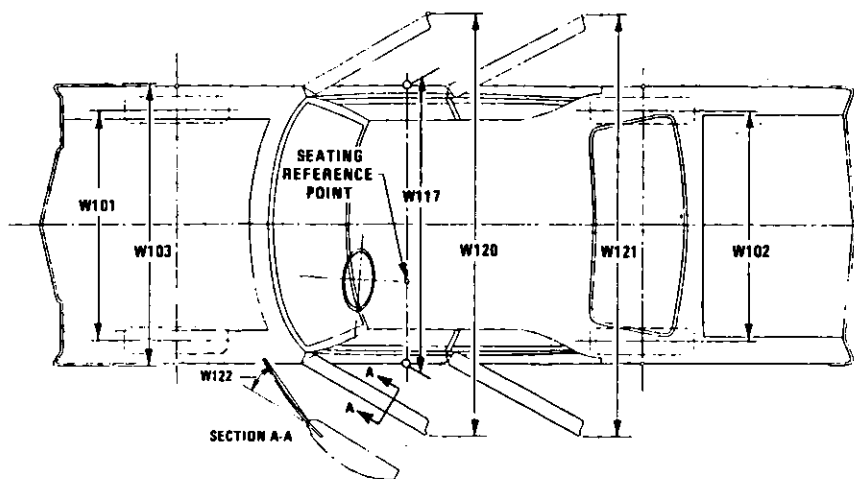

#### Exterior Length & Height

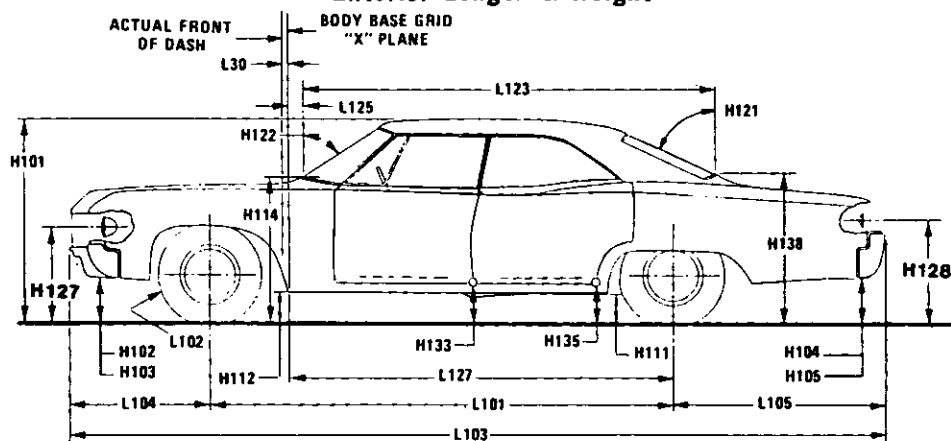

#### Exterior Ground Clearance

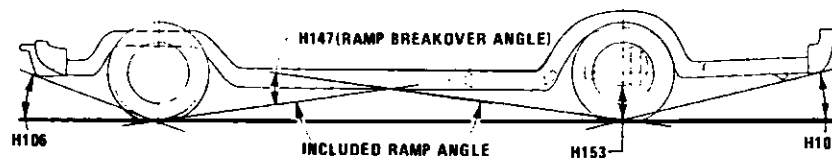


# MVMA Specifications Form

## Passenger Car


METRIC (U.S. Customary)

### Interior Car And Body Dimensions – Key Sheet


#### Front Compartment

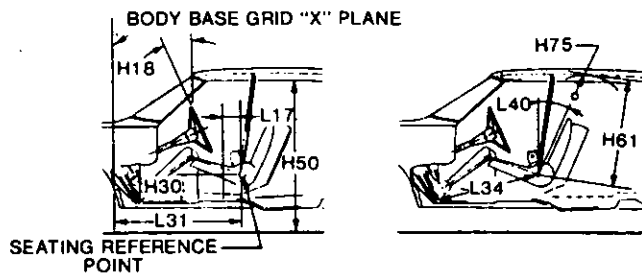


#### Rear Compartment

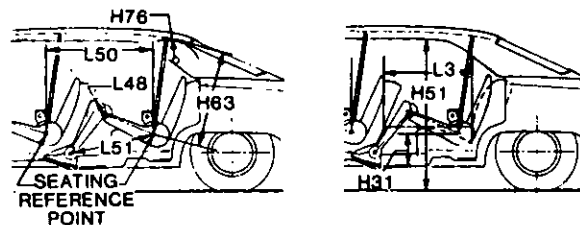

#### Third Seat

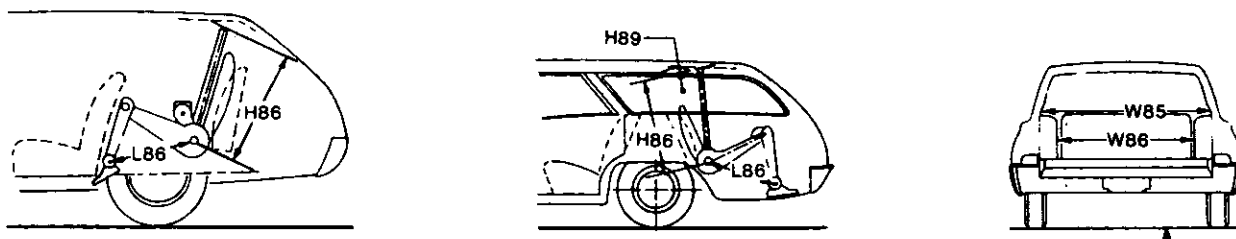


#### Cargo Space

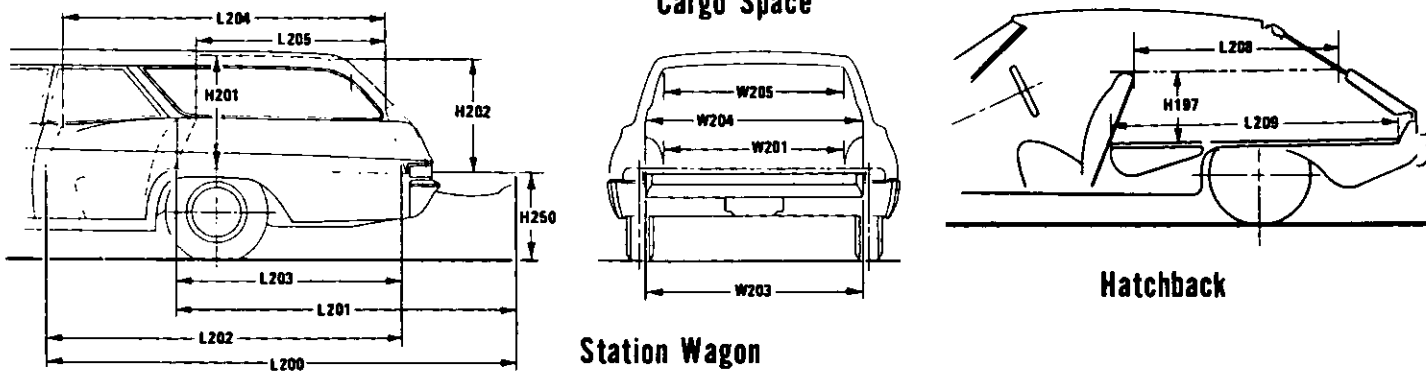

#### Station Wagon

#### Interior Width

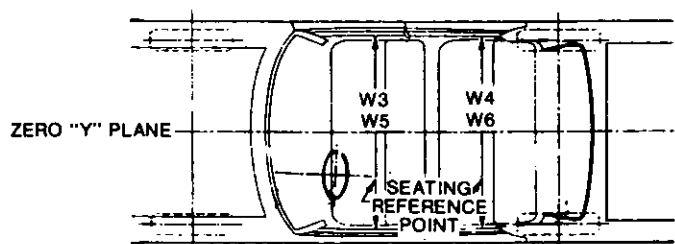

# MVMA Specifications Form

## Passenger Car

### METRIC (U.S. Customary)

#### Exterior Car And Body Dimensions – Key Sheet

##### Dimensions Definitions

##### Seating Reference Point

SEATING REFERENCE POINT means the manufacturer's design reference point which –

- (a) Establishes the rearmost normal design driving or riding position of each designated seating position in a vehicle;
- (b) Has coordinates established relative to the design vehicle structure;
- (c) Simulates the position of the pivot center of the human torso and thigh; and
- (d) Is the reference point employed to position the two dimensional templates described in SAE Recommended Practice J826, "Manikins for Use in Defining Vehicle Seating Accommodations," November 1962.

##### Width Dimensions

- W101 TREAD–FRONT. The dimension measured between the tire centerlines at the ground.
- W102 TREAD–REAR. The dimension measured between the tire centerlines at the ground. In case of dual wheels, the dimension will be measured to the centerline of tire and wheel assemblies.
- W103 VEHICLE WIDTH. The maximum dimension measured between the widest point on the vehicle, excluding exterior mirrors, flexible mud flaps, marker lamps, but including bumpers, moldings, sheet metal protrusions or dual wheels, if standard equipment.
- W117 BODY WIDTH AT SgRP–FRONT. The dimension measured laterally between the widest points on the body at the SgRP-front, excluding door handles, applied moldings, or appliques.
- W120 VEHICLE WIDTH–FRONT DOORS OPEN. The dimension measured between the widest point on the front doors in maximum hold-open position.
- W121 VEHICLE WIDTH–REAR DOORS OPEN. The dimension measured between the widest point on the rear doors in maximum hold-open positions. For vehicles with a rear door on only one side, this dimension is to the zero "Y" plane.
- W122 TUMBLE HOME. STRAIGHT SIDE GLASS. The angle measured from a vertical to the outside surface of the front door glass at the SgRP "X" plane.  
CURVED SIDE GLASS. The angle measured from a vertical to a chord extending from the upper DLO to the lower DLO at the outside surface of the front door glass at the front SgRP "X" plane.

##### Length Dimensions

- L30 FRONT OF DASH "X" COORDINATE. A minus (-) dimension indicates actual front of dash in forward of the zero "X" plane.
- L101 WHEELBASE (WB). The dimension measured longitudinally between front and rear wheel centerlines. In case of dual rear axles, the dimension shall be to the midpoint of the centerlines of the rear wheels.
- L102 TIRE SIZE. As specified by the manufacturer.
- L103 VEHICLE LENGTH. The maximum dimension measured longitudinally between the foremost point and the rearmost point on the vehicle, including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L104 OVERHANG–FRONT. The dimension measured longitudinally from the centerline of the front wheels to the foremost point on the vehicle including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L105 OVERHANG–REAR. The dimension measured longitudinally from the centerline of the rear wheels; or in the case

of dual rear axles, the dimension shall be the midpoint of the centerlines of the rear wheels, to the rearmost point on the vehicle, including rear bumpers, bumper guards, tow hooks and rub strips, if standard equipment.

- L123 UPPER STRUCTURE LENGTH. The dimension measured longitudinally from the cowl point to the deck point.
- L127 REAR WHEEL CENTERLINE "X" COORDINATE or in the case of dual rear axles, the coordinate shall be in the midpoint of the distance between the rear axle centerlines.
- L125 COWL POINT "X" COORDINATE.

##### Height Dimensions

- H101 VEHICLE HEIGHT. The dimension measured vertically from the highest point on the vehicle body to ground.
- H114 COWL POINT TO GROUND. Measured at zero "Y" plane.
- H138 DECK POINT TO GROUND. Measured at zero "Y" plane.
- H112 ROCKER PANEL–FRONT TO GROUND. The dimension measured vertically from the foremost point on the bottom of the rocker panels, excluding flanges, to ground.
- H132 BOTTOM OF DOOR OPEN–FRONT TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum hold-open position, to ground.
- H111 ROCKER PANEL–REAR TO GROUND. The dimension measured vertically from the bottom of the rocker or side quarter panel at the front of the rear wheel opening, excluding flanges, to ground.
- H134 BOTTOM OF DOOR OPEN–REAR TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum hold-open position, to ground.
- H135 BOTTOM OF DOOR CLOSED–REAR TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum closed position, to ground.
- H121 BACKLIGHT SLOPE ANGLE. The angle between the vertical reference line and the surface of backlight at vehicle zero "Y" plane. For curve backlight, the angle is to chord of backlight arc from lower DLO to upper DLO.
- H122 WINDSHIELD SLOPE ANGLE. The angle between the vertical reference line and a chord of the windshield are running from the lower DLO to the upper DLO at the vehicle zero "Y" plane. In the case of wrap over glass, the angle to be measured will be formed by a chord 457 mm (18.0 in.) long drawn from the lower DLO to the intersecting point on the windshield.
- H127 HEADLAMP TO GROUND–CURB MASS (WT.). The dimension measured vertically from the centerline of the lowest headlamp lens to ground.
- H128 TAILLAMP TO GROUND–CURB MASS (WT.). The dimension measured vertically from the centerline of the upper bulb to ground.

##### Ground Clearance Dimensions

- H102 FRONT BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the front bumper to ground, including bumper guards, if standard equipment.
- H103 FRONT BUMPER TO GROUND CURB MASS (WT.). Measured in the same manner as H104.
- H104 REAR BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the rear bumper to ground, including bumper guards, if standard equipment.
- H105 REAR BUMPER TO GROUND – CURB MASS (WT.). Measured in the same manner as H104.



# MVMA Specifications Form

## Passenger Car

### METRIC (U.S. Customary)

#### Interior Car And Body Dimensions – Key Sheet

##### Dimensions Definitions

- H106 ANGLE OF APPROACH. The angle measured between a line tangent to the front tire static loaded radius are the initial point of structural interference forward of the front tire to ground. The limiting structural component shall be designated.
- H107 ANGLE OF DEPARTURE. The angle measured between a line tangent to the rear tire static loaded radius are the initial point of structural interference rearward of the rear tire to ground. The limiting component shall be designated.
- H147 REAR BREAKOVER ANGLE. The angle measured between two lines tangent to the front and rear tire static loaded radius and intersecting at a point on the underside of the vehicle which defines the largest ramp over which the vehicle can roll.
- H153 REAR AXLE DIFFERENTIAL TO GROUND. The minimum dimension measured from the rear axle differential to ground.
- H156 MINIMUM RUNNING GROUND CLEARANCE. The minimum dimension measured from the sprung vehicle to ground. Specify location.

#### Front Compartment Dimensions

- PD1 PASSENGER DISTRIBUTION—FRONT.
- L31 SgRP—FRONT "X" COORDINATED.
- H61 EFFECTIVE HEAD ROOM—FRONT. The dimension measured along a line 8 deg. rear of vertical from the SgRP—front to the headlining plus 102 mm (4.0 in.).
- H75 EFFECTIVE T-POINT HEAD ROOM—FRONT. The minimum radius from the T-point to the headlining plus 762 mm (30 in.).
- L34 MAXIMUM EFFECTIVE LEG ROOM—ACCELERATOR. The dimension measured along a line from the ankle pivot center to the SgRP—front plus 254 mm (10.0 in.) measured with right foot on the undepressed accelerator pedal. For vehicles with SgRP to heel (H30) greater than 18 in., the accelerator pedal may be depressed as specified by the manufacturer. If the accelerator is depressed, the manufacturer shall place foot flat on pedal and note the depression of the pedal.
- H30 SgRP—FRONT TO HEEL. The dimension measured vertically from the SgRP—front to the accelerator heel point.
- L17 DESIGN H-POINT—FRONT TRAVEL. The dimension measured horizontally between the design H-point—front in the foremost and rearmost seat trace positions.
- W3 SHOULDER ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP—front within the belt line and 254 mm (10.0 in.) above the SgRP—front.
- W5 HIP ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP—front within 25 mm (1.0 in.) below and 76 mm (3.0 in.) above the SgRP—front and 76 mm (3.0 in.) fore and aft the SgRP—front.
- H50 UPPER BODY OPENING TO GROUND—FRONT. The dimension measured vertically from the trimmed body opening to the ground on the SgRP—front "X" plane.
- H18 STEERING WHEEL ANGLE. The angle measured from a vertical to the surface plane of the steering wheel.
- BACK ANGLE—FRONT. The angle measured between a vertical line through the SgRP—front and the torso line. If the seatback is adjustable, use the normal driving and riding position specified by the manufacturer.
- L40 BACK ANGLE—FRONT. The angle measured between a vertical line through the SgRP—front and the torso line. If the seatback is adjustable, use the normal driving and riding position specified by the manufacturer.

#### Rear Compartment Dimensions

- PD2 PASSENGER DISTRIBUTION—SECOND.
- L50 SgRP COUPLE DISTANCE. The dimension measured horizontally from the driver SgRP—front to the SgRP—second.

- H63 EFFECTIVE HEAD ROOM—SECOND. The dimension measured along a line 8 deg. rear of vertical from the SgRP to the headlining, plus 102 mm (4.0 in.).
- H76 EFFECTIVE T-POINT HEAD ROOM—SECOND. Measured in the same manner as H75.
- L51 MINIMUM EFFECTIVE LEG ROOM—SECOND. The dimension measured along a line from the ankle pivot center to the SgRP—second plus 254 mm (10.0 in.).
- H31 SgRP—SECOND TO HEEL. The dimension measured vertically from the SgRP—second to the two dimensional device heel point on the depressed floor covering.
- L48 KNEE CLEARANCE—SECOND. The minimum dimension measured from the knee pivot to the back of front seatback minus 51 mm (2.0 in.).
- L3 COMPARTMENT ROOM—SECOND. The dimension measured horizontally from the back of front seat to the front of the second seatback at a height tangent to the top of the second seat cushion.
- W4 SHOULDER ROOM—SECOND. The minimum dimension measured laterally between trimmed surfaces on the "X" plane through the SgRP—second within 254-406 mm (10.0-16.0 in.) above the SgRP—second.
- W6 HIP ROOM—SECOND. Measured in the same manner as W5.
- H51 UPPER BODY OPENING TO GROUND—SECOND. The dimension measured vertically from the trimmed body opening to the ground on the "X" plane 330 mm (13.0 in.) forward of the SgRP—second.
- L-41 Same as L-40.

#### Luggage Compartment Dimensions

- V1 USABLE LUGGAGE CAPACITY—Total of volumes of individual pieces of standard luggage set plus H-boxes stowed in the luggage compartment in accordance with the procedure described in paragraph 8.2 of SAE-J1100a.
- H195 LIFTOVER HEIGHT. The dimension measured vertically from the luggage compartment lower opening at the zero "Y" plane to ground.

#### Interior Volumes (EPA Classification)

The Interior Volume Index is listed for each body style except two seaters. The interior volume index estimates the space in a car. It is based on four measurements – head room, shoulder room, hip room, and leg room – for the front and rear seats, plus trunk capacity. The interior volume index is an estimate of the size of the passenger compartment.

The Trunk/Cargo Index is an estimate of the size of the trunk/cargo space. In station wagons and hatchbacks, it is an estimate of the space behind the second seat.

#### Station Wagon – Third Seat Dimensions

- PD3 PASSENGER DIRECTION—THIRD.
- W85 SHOULDER ROOM—THIRD. Measured in the same manner as W5.
- W86 HIP ROOM—THIRD. Measured in the same manner as W5.
- L86 EFFECTIVE LEG ROOM—THIRD. The dimension measured along a line from the ankle pivot center to the SgRP—third plus 254 mm (10.0 in.).
- H86 EFFECTIVE HEAD ROOM—THIRD. The dimension, measured along a line 8 deg. from the SgRP—third to the headlining rear of vertical plus a constant of 102 mm (4.0 in.).
- H89 EFFECTIVE T-POINT HEAD ROOM—THIRD. Measured in the same manner as H75.
- L-88 Same as L-40.

#### Station Wagon – Cargo Space Dimensions

- L200 CARGO LENGTH—OPEN—FRONT. The minimum dimension measured longitudinally from the back of the front

# MVMA Specifications Form

## Passenger Car

### METRIC (U.S. Customary)

#### Interior Car And Body Dimensions – Key Sheet

##### Dimensions Definitions

#### Station wagon – Cargo Space Dimensions (con't.)

- seatback at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the open tailgate or cargo surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.
- L201 CARGO LENGTH-OPEN-SECOND.** The dimension measured longitudinally from the back of the second seatback at the height of the undepressed floor covering on the open tailgate or cargo floor surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.
- L202 CARGO LENGTH-CLOSED-FRONT.** The minimum dimension measured horizontally from the back of the front seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L203 CARGO LENGTH-CLOSED-SECOND.** The dimension measured horizontally from the back of the second seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L204 CARGO LENGTH AT BELT-FRONT.** The minimum dimension measured horizontally from the back of the front seatback at the seatback top to the foremost normal surface of the closed tailgate or inside surface of the cab back panel at the height of the belt, on the zero "Y" plane.
- L205 CARGO LENGTH AT BELT-SECOND.** The minimum dimension measured horizontally from the back of the second seatback at the seatback top to the foremost normal surface of the closed tailgate at the height of the belt, on the zero "Y" plane.
- V201 CARGO WIDTH-WHEELHOUSE.** The minimum dimension measured laterally between the trimmed wheelhousings at floor level. For any vehicle not trimmed, measure the sheet metal.
- W203 REAR OPENING WIDTH AT FLOOR.** The minimum dimension measured laterally between the limiting interferences of the rear door opening at floor level.
- W204 REAR OPENING WIDTH AT BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening at belt height or top of pick up box.
- W205 REAR OPENING WIDTH ABOVE BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening above the belt height.
- H201 CARGO HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the headlining at the rear wheel "X" coordinated on the zero "Y" plane.
- H202 REAR OPENING HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the upper trimmed opening on the zero "Y" plane with rear door fully open.
- H250 TAILGATE TO GROUND (CURB MASS WT.).** The dimension measured vertically from the top of the undepressed floor covering on the lowered tailgate to ground on the zero "Y" plane.
- V2 STATION WAGON**  
Measured in inches:  

$$\frac{W4 \times H201 \times L204}{1728} = \text{ft.}^3$$
 Measured in mm:  

$$\frac{W4 \times H201 \times L204}{10^9} = \text{m}^3 \text{ (cubic meter)}$$
- V4 HIDDEN CARGO VOLUME.** As specified by the manufacturer.

- V10 STATION WAGON (REAR OF SECOND SEAT)**  
Measured in inches:

$$\frac{W4 \times H201 \times L205}{1728} = \text{ft.}^3$$

Measured in mm:

$$\frac{W4 \times H201 \times L205}{10^9} = \text{liters}$$

#### Hatchback – Cargo Space Dimensions

All hatchback cargo dimensions are to be taken with the front seat in full down and rear position, and the rear seat folded down. The hatchback door is in the closed position. (For electrically adjusted seats, see the manufacturer's specifications for Design "H" Point).

- H197 FRONT SEATBACK TO LOAD HEIGHT.** The dimension measured vertically from the horizontal tangent to the top of the seatback to the undepressed floor covering.
- H198 SECOND SEATBACK TO LOAD FLOOR HEIGHT.** The vertical dimension from the horizontal tangent to top of seatback to undepressed floor covering at zero "Y" plane.
- L208 CARGO LENGTH AT FRONT SEATBACK HEIGHT.** The minimum horizontal dimension from the "X" plane tangent to the rearmost surface of the driver's seatback to the inside limiting interference of the hatchback door on the vehicle zero "Y" plane.
- L209 CARGO LENGTH AT FLOOR-FRONT-HATCHBACK.** The minimum horizontal dimension measured at floor level from the rear of the front seatback to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.
- L210 CARGO LENGTH AT SECOND SEATBACK HEIGHT-HATCHBACK.** The horizontal dimension from the "X" plane tangent to rearmost surface of second seatback or the load floor which is stowed at least one half of the H198 dimension height above the rear load floor, to the rearmost inside limiting interference on the zero "Y" plane.
- L211 CARGO LENGTH AT FLOOR-HATCHBACK-SECOND.** The horizontal dimension at floor level from the rear of the second seatback or load floor panel to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.
- V3 HATCHBACK.**  
Measured in inches:  

$$\frac{\frac{L208 + L209}{2} \times W4 \times H197}{1728} = \text{ft.}^3$$
 Measured in mm:  

$$\frac{\frac{L208 + L209}{2} \times W4 \times H197}{10^9} = \text{m}^3 \text{ (cubic meter)}$$
- V11 HATCHBACK (REAR OF SECOND SEAT)**  
Measured in inches:  

$$\frac{W4 \times H198 \times \frac{L210 + L211}{2}}{1728} = \text{ft.}^3$$
 Measured in mm:  

$$\frac{W4 \times H198 \times \frac{L210 + L211}{2}}{10^9} = \text{litres}$$

# MVMA Specifications Form

## Passenger Car

### METRIC (U.S. Customary)

#### Index

| Subject                                   | Page No.   |
|---|------------|
| Aerodynamics .....                        | 22         |
| Alternator .....                          | 16         |
| Automatic Transmission .....              | 9          |
| Axis, Steering .....                      | 14         |
| Axle, Rear .....                          | 10         |
| Axle Shafts .....                         | 10         |
| Battery .....                             | 16         |
| Brakes—Parking, Service .....             | 12, 13     |
| Camber .....                              | 15         |
| Camshaft .....                            | 3          |
| Capacities .....                          |            |
| Cooling System .....                      | 5          |
| Fuel Tank .....                           | 6          |
| Lubricants .....                          |            |
| Engine Crankcase .....                    | 4          |
| Transmission .....                        | 9          |
| Rear Axle .....                           | 10         |
| Car Models .....                          | 1          |
| Car and Body Dimensions .....             |            |
| Width .....                               | 20         |
| Length .....                              | 20         |
| Height .....                              | 20         |
| Ground Clearance .....                    | 20         |
| Front Compartment .....                   | 21         |
| Rear Compartment .....                    | 21         |
| Luggage Compartment .....                 | 21         |
| Station Wagon — Third Seat .....          | 22         |
| Station Wagon — Cargo Space .....         | 22         |
| Hatchback — Cargo Space .....             | 22         |
| Carburetor .....                          | 2, 6       |
| Caster .....                              | 15         |
| Choke, Automatic .....                    | 6          |
| Clutch — Pedal Operated .....             | 8          |
| Coil, Ignition .....                      | 16         |
| Connecting Rods .....                     | 4          |
| Convenience Equipment .....               | 19         |
| Cooling System .....                      | 5          |
| Crankshaft .....                          | 4          |
| Cylinders and Cylinder Head .....         | 3          |
| Diesel Information .....                  | 4          |
| Dimension Definitions .....               |            |
| Key Sheet — Exterior .....                | 27, 29     |
| Key Sheet — Interior .....                | 28, 30, 31 |
| Electrical System .....                   | 15, 16     |
| Emission Controls .....                   | 7          |
| Engine — General .....                    |            |
| Bore, Stroke, Type .....                  | 3          |
| Compression Ratio .....                   | 2          |
| Displacement .....                        | 2, 3       |
| Firing Order, Cylinder Numbering .....    | 3          |
| General Information, Power & Torque ..... | 2          |
| Identification Number Location .....      | 17         |
| Power Teams .....                         | 2          |
| Exhaust System .....                      | 7          |
| Equipment Availability, Convenience ..... | 19         |
| Fan, Cooling .....                        | 5          |
| Fiducial Marks .....                      | 23         |
| Filters — Engine Oil, Fuel System .....   | 4          |
| Frame .....                               | 17         |
| Front Suspension .....                    | 11         |
| Front Wheel Drive Unit .....              | 10         |
| Fuel System .....                         | 6          |
| Fuel Injection .....                      | 6          |
| Fuel Tank .....                           | 6          |
| Generator and Regulator .....             | 16         |
| Glass .....                               | 17         |
| Headroom — Body .....                     | 21, 22     |
| Heights — Car and Body .....              | 20         |
| Horns .....                               | 15         |
| Horsepower — Brake .....                  | 2          |
| Ignition System .....                     | 16         |
| Inflation — Tires .....                   | 13         |
| Instruments .....                         | 15         |

| Subject                                    | Page No. |
|--|----------|
| Kingpin (Steering Axis) .....              | 14       |
| Lamps and Headlamp Shape .....             | 24       |
| Legroom .....                              | 21, 22   |
| Lengths — Car and Body .....               | 20       |
| Leveling, Suspension .....                 | 11       |
| Lifters, Valve .....                       | 4        |
| Linings — Clutch, Brake .....              | 8, 12    |
| Lubrication — Transmission .....           | 8, 9     |
| Luggage Compartment .....                  | 21       |
| Mass .....                                 | 25, 26   |
| Models .....                               | 1        |
| Motor Starting .....                       | 16       |
| Muffler .....                              | 7        |
| Passenger Capacity .....                   | 1        |
| Passenger Mass Distribution .....          | 25       |
| Pistons .....                              | 3        |
| Power Brakes .....                         | 12       |
| Power, Engine .....                        | 2        |
| Power Steering .....                       | 14       |
| Power Teams .....                          | 2        |
| Propeller Shaft, Universal Joints .....    | 10       |
| Pumps — Fuel .....                         | 6        |
| Water .....                                | 5        |
| Radiator — Cap, Hoses .....                | 5        |
| Ratios — Axle .....                        | 2, 9     |
| Compression .....                          | 2        |
| Steering .....                             | 14       |
| Transmission .....                         | 2, 8, 9  |
| Rear Axle .....                            | 2, 9, 10 |
| Regulator — Generator .....                | 16       |
| Restraint System .....                     | 18       |
| Rims .....                                 | 13       |
| Rods — Connecting .....                    |          |
| Seats .....                                |          |
| Shock Absorbers, Front & Rear .....        | 11       |
| Spark Plugs .....                          | 16       |
| Speedometer .....                          | 15       |
| Springs — Front & Rear Suspension .....    | 11       |
| Stabilizer (Sway Bar) — Front & Rear ..... | 11       |
| Starting System .....                      | 16       |
| Steering .....                             | 14       |
| Suppression — Ignition, Radio .....        | 16       |
| Suspension — Front & Rear .....            | 11       |
| Tail Pipe .....                            | 7        |
| Theft Protection .....                     | 19       |
| Thermostat, Cooling .....                  | 5        |
| Tires .....                                | 13       |
| Toe-In .....                               | 15       |
| Torque Converter .....                     | 9        |
| Torque — Engine .....                      | 2        |
| Transaxle .....                            | 9        |
| Transmission — Types .....                 | 2, 8, 9  |
| Transmission — Automatic .....             | 2, 8, 9  |
| Transmission — Manual .....                | 2, 8, 9  |
| Transmission — Ratios .....                | 2, 9     |
| Tread .....                                | 20       |
| Trunk Cargo Load .....                     | 1        |
| Trunk Luggage Capacity .....               | 21       |
| Turning Diameter .....                     | 14       |
| Unitized Construction .....                | 17       |
| Universal Joints, Propeller Shaft .....    | 10       |
| Valve System .....                         | 4        |
| Vehicle Identification Number .....        | 17       |
| Voltage Regulator .....                    | 16       |
| Water Pump .....                           | 5        |
| Weights .....                              | 25, 26   |
| Wheel Alignment .....                      | 15       |
| Wheelbase .....                            | 20       |
| Wheels & Tires .....                       | 12       |
| Wheel Spindle .....                        |          |
| Widths — Car and Body .....                |          |
| Windshield .....                           | 17       |
| Windshield Wiper and Washer .....          | 15       |