

MANUFACTURERS MOTOR VEHICLE SPECIFICATIONS

METRIC (U.S. Customary)

1993

Manufacturer TOYOTA MOTOR CORPORATION	Vehicle Line TOYOTA MR2	
Mailing Address Toyota Motor Sales, U.S.A., Inc. 19001 South Western Avenue P.O. Box 2991 Torrance, California 90509-2991	Issued Jan., 1992	Revised

Direct questions concerning these specifications to the manufacturer listed above.

The information contained herein is prepared, distributed by, and is solely the responsibility of the vehicle manufacturing company to whose products it relates. This suggested specification form was developed by the vehicle manufacturing companies under the auspices of the Motor Vehicle Manufacturers Association of the United States, Inc.

The General Specifications herein are those in effect at date of compilation and are subject to change without notice or incurring obligation by the manufacturer.



Motor Vehicle Manufacturers Association
of the United States, Inc.

Forms Provided by Technical Affairs Division

MVMA Specifications

METRIC (U.S. Customary)

Table of Contents

		Ø Indicates Format Change From Previous Year
	1	Vehicle Models/Origin
	2	Power Teams
Ø	3	Engine
	4	Lubrication System
	4	Diesel Information
	5	Cooling System
	6	Fuel System
	7	Vehicle Emission Control
	7	Exhaust System
Ø	8-10	Transmission, Axles and Shafts
Ø	11	Suspension
Ø	12-13	Brakes, Tires and Wheels
Ø	14	Steering
Ø	15-16	Electrical
	17	Body – Miscellaneous Information
Ø	17	Frame
	18	Restraint System
	18	Glass
	18	Headlamps
Ø	19	Climate Control System
	20-21	Convenience Equipment
	21	Trailer Towing
Ø	22-24	Vehicle Dimensions
	25	Vehicle Fiducial Marks
	26	Vehicle Mass (Weight)
	27	Optional Equipment Differential Mass (Weight)
Ø	28-34	Vehicle Dimensions Definitions - Key Sheets
Ø	35	Index

NOTE:

1. This form uses both SI metric units and U.S. Customary units. The metric unit of measure is presented first, and the U.S. Customary unit follows in parentheses.
2. UNLESS OTHERWISE INDICATED:
 - a. Specifications apply to standard models without optional equipment. Significant deviations are noted.
 - b. Nominal design dimensions are used throughout these specifications.
 - c. All linear dimensions are in millimeters (inches), and all mass (weight) specifications are in kilograms (pounds).
3. The General Specifications herein are those in effect at date of compilation and are subject to change without notice or incurring obligation by the manufacturer.
4. Additional Vehicle Dimensions (based in part on SAE J1100 "Motor Vehicle Dimensions") may be available from the manufacturer.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (-) _____

Vehicle Origin

Design & development (company)	Toyota Motor Corporation
Where built (country)	Japan
Authorized U.S. sales marketing representative	Toyota Motor Sales, U.S.A. Inc.

Vehicle Models

Model Description & Drive (FWD / RWD / AWD / 4WD)*	Introduction Date	Make, Vehicle Models, Series, Body Type (Mfr's Model Code)	No. of Designated Seating Positions (Front/Rear)	Max. Trunk/Cargo Load-Kilograms (Pounds)	EPA Fuel Economy (City/Hwy)
				kg (Front/Rear)	
2.0L turbo 5-sp. man., RWD		2dr-coupe SW20L-ACMZZA	(2/0)	15/30	
		2dr-coupe w/T-bar roof SW20L-AJMZZA	(2/0)	15/30	
2.2L 5-sp. man., RWD		2dr-coupe SW21L-ACMZKA	(2/0)	15/30	
		2dr-coupe w/T-bar roof SW21L-AJMZKA	(2/0)	15/30	
4-sp. auto., RWD		2dr-coupe SW21L-ACPZKA	(2/0)	15/30	

* FWD - Front Wheel Drive RWD - Rear Wheel Drive AWD - All Wheel Drive 4WD - Four Wheel Drive

Power Teams

Model Year 1993

Issued Jan., 1992 Revised (-)

SAE J1349 Net bhp (brake horsepower) and Net Torque corrected to 77°F/25°C and 29.61 in. Hg/100 kPa atmospheric pressure.

		A	B	C	D	
E N G I N E	Engine Code	3S-GTE	5S-FE	5S-FE		
	Displacement Liters (in³)	1.998 (122)	2.164 (132)	2.164 (132)		
	Induction system (FI, Carb. etc.)	FI w/turbo	FI	FI		
	Compression ratio	8	9.5	9.5		
	SAE Net at RPM	Power kW (bhp)	149 (200)/6000	Fed. 101 (135)/5400 Cal. 97 (130)/5400	Fed. 101 (135)/5400 Cal. 97 (130)/5400	
		Torque N·m (lb. ft.)	271 (200)/3200	197 (145)/4400	197 (145)/4400	
Exhaust single, dual		Single	Single	Single		
T R A N S	Transmission/ Transaxle	5-speed manual	5-speed manual	4-speed automatic		
	Axle Ratio (std. first)	4.285	4.176	3.034		

[illegible]

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (•)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

ENGINE - GENERAL

Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sohc, dohc, ohv, hemi, wedge, pre-chamber, etc.)

Inline, mid, transverse, dohc, pentroof

Manufacturer

TOYOTA

No. of cylinders

4

Bore

86.0

87.0

Stroke

86.0

91.0

Bore spacing (C/L to C/L)

93.5-96.5-93.5

Cylinder block material & mass kg (lbs.) (machined)

FC23, 36.3

Gray cast iron, 42.6

Cylinder block deck height

216

Cylinder block length

409.5

Deck clearance (minimum) (above or below block)

0.1

0

Cylinder head material & mass kg (lbs.)

Aluminum alloy, 12.5

Aluminum alloy, 12.4

Cylinder head volume cm³ (inches³)

50.8

40.6

Cylinder liner material

N.A.

N.A.

Head gasket thickness (compressed)

1.25

1.20

Minimum combustion chamber total volume cm³ (inches³)

64.1

63.6

Cyl. no. system (front to rear)*

L Bank

1, 2, 3, 4

R Bank

Firing order

1-3-4-2

Intake manifold material & mass kg (lbs.)**

Aluminum alloy, 4.1

Aluminum alloy, 4.4

Exhaust manifold material & mass kg (lbs.)**

SCH1A (cast steel), 4.56

Spheroidal graphite cast iron, 5.9

Knock sensor (number & location)

Fuel required unleaded, diesel, etc.

Unleaded premium gasoline only

Unleaded gasoline

Fuel antiknock index (R + M) + 2

91

87

Engine mounts

Quantity

Material and type (elastomeric, hydroelastic, hydraulic damper, etc.)

Added isolation (sub-frame, crossmember, etc.)

Total dressed engine mass (wt) dry***

173

M/T=141, A/T=133

Engine - Pistons

Material & mass, g (weight, oz.) - piston only

Aluminum alloy, 393

Aluminum alloy, 369

Engine - Camshaft

Location

Overhead

Material & mass kg (weight, lbs.)

Cast iron, 1.7 x 2

Alloy cast iron, Intake=2.0
Exhaust=1.6

Drive type

Chain / belt

Belt

Belt

Gear

Width / pitch

25.4/8

26.7/8.0

14/1.9 (module)

* Rear of engine - drive takeoff. View from drive takeoff end to determine left & right side of engine.

** Finished state.

*** Dressed engine mass (weight) includes the following:

MVMA Specifications

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*)

METRIC (U.S. Customary)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

Engine - Valve System

Hydraulic lifters (std., opt., n.a.)	N.A.		
Valves	Number intake / exhaust	8/8	
	Head O.D. intake / exhaust	33.5/29.0	32/27

Engine - Connecting Rods

Material & mass kg., (weight, lbs.)*	Steel, 0.770	Alloy steel, 0.70
Length (axes C/L to C/L)		

Engine - Crankshaft

Material & mass kg.. (weight, lbs.)*		Steel, 18.6	Alloy steel, 18.7
End thrust taken by bearing (no.)		No.3	
Length & number of main bearings		, 5	
Seal (material, one, two piece design, etc.)	Front	Fluoroelastmer rubber, one piece	Fluoroelastmer rubber, one piece
	Rear	Fluoroelastmer rubber, one piece	Fluoroelastmer rubber, one piece

Engine - Lubrication System

Normal oil pressure kPa (psi) at engine rpm	275 at 2500	343 at 2500
Type oil intake (floating, stationary)	Stationary	
Oil filter system (full flow, part, other)	Full flow	
Capacity of c/case, less filter-refill-L (qt.)	3.6	3.8

Engine - Diesel Information

Diesel engine manufacturer		
Glow plug, current drain at 0°F		
Injector nozzle	Type	-
	Opening pressure kPa (psi)	---
Pre-chamber design		- -
Fuel injection pump	Manufacturer	
	Type	
Fuel injection pump drive (belt, chain, gear)		
Supplementary vacuum source (type)		
Fuel heater (yes/no)		
Water separator, description (std., opt.)		
Turbo manufacturer		
Oil cooler-type (oil to engine coolant; oil to ambient air)		
Oil filter		

Engine - Intake System

Turbo charger - manufacturer	TOYOTA	
Super charger - manufacturer	-	
Intercooler	Air cooled	

* Finished State

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2
Model Year 1993 Issued Jan., 1992 Revised (-)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

Engine - Cooling System

Coolant recovery system (std., opt., n.a.)	Std.	
Coolant fill location (rad., bottle)	Filler neck near LH rear suspension tower	
Radiator cap relief valve pressure kPa (psi)	88	
Circulation thermostat	Type (choke, bypass)	Bypass
	Starts to open at °C (°F)	82°
Water pump	Type (centrifugal, other)	Centrifugal
	GPM 1000 pump rpm	0.6L/sec.
	Number of pumps	1
	Drive (V-belt, other)	Timing belt
	Bearing type	Prepacked ball bearing
	Impeller material	Stainless steel
	Housing material	Aluminum
By-pass recirculation type (inter., ext.)	External	Aluminum alloy
Cooling system capacity	With heater - L(qt.)	13.6
	With air conditioner - L(qt.)	-
	Opt. equipment specify - L(qt.)	-
Water jackets full length of cyl. (yes, no)	No	N.A.
Water all around cylinder (yes, no)	No	
Water jackets open at head face (yes, no)	No	
Radiator core	Std., A/C, HD	Std.
	Type (cross-flow, etc.)	Cross-flow
	Construction (fin & tube mechanical, braze, etc.)	Corrugated fin and tube, braze
	Material, mass kg (wt., lbs.)	Copper alloy, 5.3
	Width	675
	Height	318
	Thickness	32
	Fins per inch	17
Radiator end tank material	Copper alloy	20
Fan	Std., elec., opt.	Electric
	Number of blades & type (flex, solid, material)	4, solid
	Diameter & projected width	300, 47
	Ratio (fan to crankshaft rev.)	-
	Fan cutout type	-
	Drive type (direct, remote)	-
	RPM at idle (elec.)	2100
	Motor rating (wattage/elec.)	80
	Motor switch (type & location/elec.)	Temperature controlled, radiator
	Switch point (temp., pressure/elec.)	80 120
	Fan shroud (material)	Steel plate

MVMA Specifications

Vehicle Line TOYOTA MR2
Model Year 1993 Issued Jan., 1992 Revised (*)

METRIC (U.S. Customary)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

Engine - Fuel System (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

Induction type: carburetor, fuel injection system, etc.		Fuel injection system	
Manufacturer		NIPPONDENSO	
Carburetor no. of barrels		-	
Idle A/F mix.		Preset at manufacturer	
Fuel injection	Point of injection (no.)	4	
	Constant, pulse, flow	Pulse	
	Control (electronic, mech.)	Electronic	
	System pressure kPa (psi)	250	284
Idle spd.-rpm (spec. neutral or drive and propene if used)	Manual	800	ISC
	Automatic	-	ISC
Intake manifold heat control (exhaust or water thermostatic or fixed)		N.A.	
Air cleaner type		Dry	
Fuel filter (type/location)			
Fuel pump	Type (elec. or mech.)	Electro-magnetic	
	Location (eng., tank)	In tank	
	Pressure range kPa (psi)	250	284
	Flow rate at regulated pressure L (gal)/hr @ kPa (psi)		

Fuel Tank

Capacity refill L (gallons)		54	
Location (describe)		Underfloor, at front floor tunnel	
Attachment		Bands and bolt	
Material & Mass kg (weight lbs.)		Steel	
Filler pipe	Location & material	Left quarter panel, Steel	
	Connection to tank	Rubber hose	
Fuel line (material)		Steel	
Fuel hose (material)		Rubber	
Return line (material)		Steel	
Vapor line (material)		Steel	
Extended range tank	Opt., n.a.	N.A.	
	Capacity L (gallons)		
	Location & material		
	Attachment		
Auxiliary tank	Opt., n.a.	N.A.	
	Capacity L (gallons)		
	Location & material		
	Attachment		
	Selector switch or valve		
	Separate fill		

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (-)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

Vehicle Emission Control

Exhaust Emission Control	Type (air injection, engine modifications, other)		MPI, EGR, O ₂ S, TWC			
	Air Injection	Pump or pulse	N.A.			
		Driven by	-			
		Air distribution (head, manifold, etc.)	-			
		Point of entry	-			
	Exhaust Gas Recirculation	Type (controlled flow, open on/off, other)	Back pressure control			
		Exhaust source	No.4 exhaust port Intake manifold			
		Point of exhaust injection (spacer, carburetor, manifold, other)				
	Catalytic Converter	Type	3-way			
		Number of	2		Fed. 1	Cal. 2
		Location(s)	Exhaust manifold under floor		Exhaust manifold	Exhaust manifold under floor
		Volume L (in ³)	1.3 + 0.5		1.3	1.3 + 0.5
		Substrate type	Monolith			
		Noble metal type	-			
		Noble metal concentration (g/cm ³)	-			
Crankcase Emission Control	Type (ventilates to atmosphere, induction system, other)		Sealed			
	Energy source (manifold vacuum, carburetor, other)		Manifold vacuum			
	Discharges to (intake manifold, other)		Intake manifold			
	Air inlet (breather cap, other)		N.A.			
Evaporative Emission Control	Vapor vented to (crankcase, canister, other)	Fuel tank	Canister			
		Carburetor	-			
	Vapor storage provision		Canister			
Electronic system	Closed loop (yes/no)		Yes			
	Open loop (yes/no)		No			

Engine - Exhaust System

Type (single, single with cross-over, dual, other)		Single			
Muffler no. & type (reverse flow, straight thru, separate resonator) Material & Mass kg (weight lbs)		1, reverse flow			
Resonator no. & type		N.A.			
Exhaust pipe	Branch o.d., wall thickness	N.A.			
	Main o.d., wall thickness	60.5/54.0, 2.0 1.2		Fed. 54, 1.5	Cal. 54, 1.5 1.2
	Material & Mass kg (weight lbs)	Stainless steel, 2.0		Stainless steel, 2.2 Stainless steel, 1.5	
Inter-mediate pipe	o.d. & wall thickness	N.A.			
	Material & Mass kg (weight lbs)	N.A.			
Tail pipe	o.d. & wall thickness	60.5, 1.2		54, 1.2	
	Material & Mass kg (weight lbs)	Stainless steel, 2.2		Stainless steel, 2.1	

MVMA Specifications

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*)

METRIC (U.S. Customary)

Engine Description
Engine Code

3S-GTE, 1.998L, Turbo

5S-FE, 2.164L

Transmissions/Transaxle (Std., Opt., N.A.)

Manual 4-speed (manufacturer/country)	N.A.
Manual 5-speed (manufacturer/country)	TOYOTA/Japan
Manual 6-speed (manufacturer/country)	
Automatic (manufacturer/country)	N.A.
Automatic overdrive (manufacturer/country)	N.A. AISIN A.W./Japan

Manual Transmission/Transaxle

Number of forward speeds		5	
Gear ratios	1st	3.230	3.285
	2nd	1.913	1.960
	3rd	1.258	1.322
	4th	0.918	1.028
	5th	0.731	0.820
	6th		
	Reverse	3.545	3.153
Synchronous meshing (specify gears)		All forward=1st through to 5th	
Shift lever location		Floor	
Trans. case mat'l. & mass kg (lbs)*		-	
Lubricant	Capacity L (pt.)	4.2, w/LSD 3.9	2.6
	Type recommended	Multipurpose, API GL-5	Multipurpose, API GL-3
		If it is impossible to get multipurpose gear oil API GL-3, you may use multipurpose gear oil API GL-4 or GL-5.	

Clutch (Manual Transmission)

Clutch manufacturer	AISIN SEIKI,	
Clutch type (dry, wet; single, multiple disc)	Single dry	
Linkage (hydraulic, cable, rod, lever, other)	Hydraulic	
Max. pedal effort (nom. spring load) N (lbs)	Depressed	-
	Released	-
Assist (spring, power/percent, nominal)	Turn-over spring	N.A.
Type pressure plate springs	Diaphragm	
Total spring load (nominal) N (lbs)	7350	4900
Facing mfg. & material coding	AISIN CHEMICAL	
Facing material & construction	Semi-mold	
Rivets per facing	16	
Outside x inside dia. (nominal)	236 x 150	224 x 150
Total eff. area cm ² (in. ²)	261	217
Thickness (pressure plate side/fly wheel side)	3.5/3.5	
Rivet depth (pressure plate side/fly wheel side)	-	
Engagement cushion method	Cushion spring	
Release bearing type & method lub.	Single row ball bearing, prepacked	
Torsional damping method, springs, hysteresis	Rubber	

* Includes shift linkage, lubricant, and clutch housing, if other specify.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2
Model Year 1993 Issued Jan., 1992 Revised (-)

Engine Description
Engine Code

5S-FE, 2.164L

Automatic Transmission/Transaxle

Trade Name		A241E
Type and special features (describe)		4-speed, electronic controlled planetary gear, lock-up clutch converter
Gear selector	Location (column, floor, other)	Floor
	Ltr. No. designation (e.g. PRND21)	PRND2L
	Shift interlock (yes, no, describe)	Yes
Gear ratios	1st	3.643
	2nd	2.008
	3rd	1.296
	4th	0.892
	5th	
	6th	
	Reverse	2.977
Max. upshift speed - drive range km/h (mph)		137
Max. kickdown speed - drive range km/h (mph)		131
Min. overdrive speed km/h (mph)		21
Torque converter	Number of elements	3
	Max. ratio at stall	2.1
	Type of cooling (air, liquid)	Liquid
	Nominal diameter	241
	Capacity factor "K"	-
Lubricant	Capacity refill L (pt.)	8.0 including differential
	Type recommended	ATF, "DEXRON II"
Oil cooler (std., opt., N.A., internal, external, air, liquid)		Std, external, integral to the radiator
Transmission mass kg (lbs) & case material**		-

All Wheel / 4 Wheel Drive

Description & type (part-time, full-time, 2/4 shift while moving, mechanical, elect., chain/gear, etc.)		
Transfer case	Manufacturer and model	
	Type and location	
Low-range gear ratio		
System disconnect (describe)		
Center differential	Type (bevel, planetary, w or w/o viscous bias, torsen, etc.)	
	Torque split (% front/rear)	

* Input speed ÷ / Torque

** Dry weight including torque converter, if other, specify.

MVMA Specifications

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*) _____

METRIC (U.S. Customary)

Engine Description
Engine Code

3S-GTE, 1.998L Turbo	5S-FE, 2.164L
5-speed manual	5-speed manual 4-speed automatic

Axle Ratio and Tooth Combinations (See 'Power Teams' for axle ratio usage)

Effective final drive ratio (for overall top gear ratio)		
Transfer ratio and method (chain, gear, etc.)		
Front drive unit	Ring gear o.d.	
	No. of teeth	Pinion
		Ring gear

Front Drive Unit

Description (integral to trans., etc.)	
Limited slip differential (type)	
Drive pinion	Type
	Offset
No. of differential pinions	
Pinion / differential	Adjustment (shim, etc.)
	Bearing adjustment
Driving wheel bearing (type)	
Lubricant	Capacity L (pt.)
	Type recommended

Axle Shafts - Rear Wheel Drive

Manufacturer and number used		TOYOTA, 2			
Type (straight, solid bar, tubular, etc.)		Left	Solid		
		Right	Solid		
Outer diam. x length* x wall thickness	Manual transaxle	Left	28.5 x 323.7	23.5 x 340.0	-
		Right	28.5 x 323.7	26.0 x 608.0	-
	Automatic transaxle	Left			23.5 x 340.0
		Right			26.0 x 608.0
	Optional transaxle	Left	N.A.		
		Right	N.A.		
Slip yoke	Type		N.A.		
	Number of teeth				
	Spline o.d.				
Universal joints	Make and mfg. no.	Inner	TOYOTA		
		Outer	TOYOTA		
	Number used		4		
	Type, size, plunge	Inner	Cross groove plunge	Tripod plunge	
		Outer	Rzeppa fixed		
	Attach (u-bolt, clamp, etc)		Snap ring		
	Bearing	Type (plain, anti-friction)	Ball bearing	N.A.	
		Lubrication (fitting, prepack)	Prepacked	N.A.	
Drive taken through (torque tube, arms or springs)		Arms			
Torque taken through (torque tube, arms or springs)		Strut			

* Centerline to centerline of universal joints, or to centerline of attachment.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (-)

Engine Description
Engine Code

3S-GTE, 1.998L Turbo	5S-FE, 2.164L
5-speed manual	5-speed manual
	4-speed, automatic

Axle Ratio and Tooth Combinations

(See "Power Teams" for axle ratio usage)

Axle ratio (or overall too gear ratio)	4.285	4.176	3.034
Ring gear o.d.	-	-	-
No. of teeth	Pinion	14	17
	Ring gear	60	71
			29
			88

Rear Axle Unit

Description	Integral to transmission		
Limited slip differential (type)	N.A. w/LSD viscous coupling N.A.		
Drive pinion	Type	Helical gear	
	Offset	-	
No. of differential pinions	4	2	2
Pinion / differential	Adjustment (shim, etc.)	-	-
	Bearing adjustment	-	-
Driving wheel bearing (type)	Double angular ball bearing		Pinion=collapsible sleeve
Lubricant	Capacity L (pt.)	Included in transmission	
	Type recommended	-	

Propeller Shaft - Rear Wheel Drive

Manufacturer			
Type (straight tube, tube-in-tube, internal-external damper, etc.)			
Outer diam. x length* x wall thickness	Manual 4-speed transmission		
	Manual 5-speed transmission		
	Manual 6-speed transmission		
	Overdrive		
	Automatic transmission		
Inter-mediate bearing	Type (plain, anti-friction)		
	Lubrication (fitting, prepack)		
Slip yoke	Type		
	Number of teeth		
	Spline o.d.		
Universal joints	Make and mtg. no.	Front	
		Rear	
	Number used		
	Type (ball and trunnion, cross)		
	Rear attach (u-bolt, clamp, etc)		
	Bearing	Type (plain, anti-friction)	
		Lubrication (fitting, prepack)	
Drive taken through (torque tube, arms or springs)			
Torque taken through (torque tube, arms or springs)			

* Centerline to centerline of universal joints, or to centerline of rear attachment. Page 10

MVMA Specifications

METRIC (U.S. Customary)

Model Code/Description And/Or
Engine Code/Description

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised ()

3S-GTE, 1.998L Turbo

5-speed manual

5S-FE, 2.164L

5-speed manual

4-speed automatic

Suspension - General Including Electronic Controls

Car leveling	Standard/optional/not avail.	N.A.
	Manual/automatic control	
	Type (air/hydraulic)	
	Primary/assist spring	
	Rear only/4 wheel leveling	
	Single/dual rate spring	
	Single/dual ride heights	
	Provision for jacking	
Shock absorber damping controls	Standard/optional/not avail.	N.A.
	Manual/automatic control	
	Number of damping rates	
	Type of actuation (manual/electric motor/air, etc.)	
	s e n s o r s Lateral acceleration	
	Deceleration	
	Acceleration	
	Road surface	
Shock absorber (front & rear)	Type	Double acting tube type
	Make	TOYOTA
	Piston diameter	32/32
	Rod diameter	22/22

Suspension - Front

Type and description		MacPherson strut	
Travel	Full jounce (define load condition)	92.7	93.3
	Full rebound	65	64.4
Spring	Type (coil, leaf, other & material)	Coil, SUP7NV	
	Insulators (type & material)	Upper, rubber	
	Size (Leaf: length & width; Coil: design height & i.d.; Bar: length & diameter)	243.1, 157.2	245.6, 157.6
	Spring rate [N/mm (lb./in.)]	24.5	22.5
	Rate at wheel [N/mm (lb./in.)]	32.3	30.4
Stabilizer	Type (link, linkless, frameless)	Link	
	Material & O.D. bar/tube, wall thickness	SVd48-M, 18.4	SVd48-M, 17.8

Suspension - Rear

Type and description		MacPherson strut	
Travel	Full jounce (define load condition)	70.9	
	Full rebound	85	
Spring	Type (coil, leaf, other & material)	Coil, SUP7	
	Size (Leaf: length & width; Coil: design height & i.d.; Bar: length & diameter)	305.2, 97.4	301.2, 97.8 304.2, 97.7
	Spring rate [N/mm (lb./in.)]	37.3	35.3
	Rate at wheel [N/mm (lb./in.)]	44.0	42.1
	Insulators (type & material)	-	
	if leaf No. of leaves Shackle (comp. or tens.)	-	
Stabilizer	Type (link, linkless, frameless)	Link	
	Material & O.D. bar/tube, wall thickness	SVd48-M, 19.0	
Track bar (type)		N.A.	

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*)

Model Code/Description And/Or
Engine Code/Description

3S-GTE, 1.998L Turbo

5S-FE, 2.164L

Brakes - Service

Description		Four wheel hydraulic actuated system	
Manufacturer and brake type (std., opt., n.a.)	Front (disc or drum)	Disc	
	Rear (disc or drum)	Disc	
Valving type (proportion, delay, metering, other)		P&B valve	
Power brake (std., opt., n.a.)		Std.	
Booster type (remote, integral, vac., hyd., etc.)		Direct, vacuum	
Vacuum	Source (inline, pump, etc.)	-	
	Reservoir (volume in.)	-	
	Pump type (elec. gear driven, belt driven)	-	
Traction control	Operational speed range	-	
	Type (engine or brake intervention)	-	
Anti-lock device	Front / rear (std., opt., n.a.)	Opt/opt.	
	Manufacturer		
	Type (electronic, mech.)		
	Number sensors or circuits		
	Number anti-lock hydraulic circuits		
	Integral or add-on system		
	Yaw control (yes, no)		
	Hydraulic power source (elec., vac. mod., pow. seq.)		
Effective area cm ² (in. ²)		200/142	168/142
Gross lining area cm ² (in. ²)(F/R)		200/142	168/142
Swept area cm ² (in. ²)(F/R)		1396/1294	1190/1199
Rotor	Outer working diameter	F/R	275/281
	Inner working diameter	F/R	165/184
	Thickness	F/R	30/22
	Material & type (vented/solid)	F/R	Cast iron ventilated/Cast iron ventilated
Drum	Diameter & width	F/R	N.A.
	Type and material	F/R	N.A.
Wheel cylinder bore		36.51/42.86, two each	
Master cylinder	Bore/stroke	F/R	Bore=23.81/23.81, Stroke=15/12
Pedal arc ratio			3.7
Line pressure at 445 N(100 lb.) pedal load (kPa (psi))		10913	10170
Lining clearance		F/R	Self adjusting/self adjusting
Brake lining	Front wheel	Bonded or riveted (rivets/seg.)	Bonded
		Rivet size	-
		Manufacturer	AKEBONO, SUMITOMO, NISSHINBO or AISIN
		Lining code*****	
		Material	Resin molded
		Size Primary or out-board	117.0 x 50.0 x 10.0
		Size Secondary or in-board	117.0 x 50.0 x 10.0
	Rear wheel	Shoe thickness (no lining)	5.5
		Bonded or riveted (rivets/seg.)	Bonded
		Manufacturer	AKEBONO, SUMITOMO, NISSHINBO or AISIN
		Lining code*****	
		Material	Resin molded
		Size Primary or out-board	82.0 x 44.5 x 10.0
		Size Secondary or in-board	94.0 x 42.9 x 10.0
Shoe thickness (no lining)		Out-board=5.5 in-board=6.0	

* Excludes rivet holes, grooves, chamfers, etc.

** Includes rivet holes, grooves, chamfers, etc.

*** Total swept area for four brakes. (Drum brake: Widest lining contact width for each brake x its contact circumference.)
(Disc brake: Square of Outer Working Dia. minus Square of Inner Working Dia. multiplied by $\pi/2$ for each brake.)

**** Size for drum brakes includes length x width x thickness.

***** Manufacturer I.D. catalog for formulation designation and coefficient of friction classification.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (-)

Model Code/Description And/Or
Engine Code/Description

3S-GTE, 1.998L Turbo

5S-FE, 2.164L

Tires And Wheels (Standard)

Tires	Size (load range, ply)		F/R	195/55R15 83V#225/50R15 91V	
	Type (bias, radial, steel, nylon, etc.)		Radial		
	Inflation pressure (cold) for recommended max. vehicle load	Front kPa (psi)	200		
		Rear kPa (psi)	230		
	Rev./mile-at 70 km/h (45 mph)		874		873
Wheels	Type & material		Full drop center rim, aluminum		
	Rim (size & flange type)		F/R	15 x 6JJ/15 x 7JJ	
	Wheel offset		F/R	45/45	
	Attachment	Type (bolt or stud)	Stud		
		Circle diameter	114.3		
Number & size		5, M12 x 1.5			
Spare	Tire and wheel		T135/70D16, 16 x 4T		
	Storage position & location (describe)		Front luggage room		

Tires And Wheels (Optional)

Tire size (load range, ply)	
Type (bias, radial, steel, nylon, etc.)	
Wheel (type & material)	
Rim (size, flange type and offset)	
Tire size (load range, ply)	
Type (bias, radial, steel, nylon, etc.)	
Wheel (type & material)	
Rim (size, flange type and offset)	
Tire size (load range, ply)	
Type (bias, radial, steel, nylon, etc.)	
Wheel (type & material)	
Rim (size, flange type and offset)	
Tire size (load range, ply)	
Type (bias, radial, steel, nylon, etc.)	
Wheel (type & material)	
Rim (size, flange type and offset)	
Spare tire and wheel size	
(If configuration is different than road tire or wheel, describe optional spare tire and/or wheel location & storage position)	

Brakes - Parking

Type of control		Hand operated
Location of control		Floor
Operates on		Rear wheel
If separate from service brakes	Type (internal or external)	-
	Drum diameter	-
	Lining size (length x width x thickness)	-

MVMA Specifications

METRIC (U.S. Customary)

Model Code/Description And/Or
Engine Code/Description

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (*)

Standard=Manual

Option=Power

Steering

Manual (std., opt., n.a.)			Std.		-	
Power (std., opt., n.a.)			-		-	
☒ Speed-sensitive (std., opt., n.a.)					Opt.	
☒ 4-wheel steering (std., opt., n.a.)						
Adjustable steering wheel/column (tilt, telescope, other)	Type		Tilt			
	Manufacturer					
	(std., opt., n.a.)		Std.			
Wheel diameter** (W9) SAE J1100	Manual		380		-	
	Power		-		-	
Turning diameter m (ft.)	Outside front	Wall to wall (l. & r.)	10.4		380	
		Curb to curb (l. & r.)	9.8			
	Inside rear	Wall to wall (l. & r.)	5.2			
		Curb to curb (l. & r.)	5.5			
Scrub Radius*						
Manual	Gear	Type	Rack and pinion		-	
		Manufacturer		KOYO SEIKO		
		Ratios	Gear	∞		
		Overall	20.6			
	No. wheel turns (stop to stop)		3.7			
Power	Type (coaxial, elec., hyd., etc.)		-			
	Manufacturer				Integral	
	Gear	Type			Pump=TOYOTA MACHINE WORKS, gear=KOYO SEIKO	
		Ratios	Gear			Rack and pinion
			Overall			∞
	Pump (drive)				17.6	
	No. wheel turns (stop to stop)				Electric motor	
Linkage	Type		Ackermann		3.1	
	Location (front or rear of wheels, other)		Front of wheels			
	Tie rods (one or two)		2			
	Inclination at camber (deg.)					
Steering axis	Bearings (type)	Upper	Ball bearing			
		Lower	Ball joint			
		Thrust	-			
Steering spindle/knuckle & joint type						

* The horizontal distance in the front elevation between wheel centerline and kingpin (ball joint) axis at ground.
** See Page 23.

MVMA Specifications

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (-)

METRIC (U.S. Customary)

Model Code/Description And/Or
Engine Code/Description

SW21L

SW20L

Wheel Alignment

Front wheel at curb mass (wt.)	Service checking	Caster (deg.)	2°55' (2°50') ±45'
		Camber (deg.)	-1°05' (-1°00') ±45'
		Toe-in outside track-mm (in.)	0 (in 1) ±2
	Service reset*	Caster (deg.)	2°55' (2°50') ±30'
		Camber (deg.)	-1°05' (-1°00') ±30'
		Toe-in - mm (in.)	0 (in 1) ±1
	Periodic M.V. inspection	Caster (deg.)	2°55' (2°50') ±45'
		Camber (deg.)	-1°05' (-1°00') ±45'
		Toe-in - mm (in.)	0 (in 1) ±2
Rear wheel at curb mass (wt.)	Service checking	Camber (deg.)	-1°40' (-1°35') ±45'
		Toe-in outside track-mm (in.)	in 7 (in 6) ±2
	Service reset*	Camber (deg.)	-1°40' (-1°35') ±30'
		Toe-in - mm (in.)	in 7 (in 6) ±1
	Periodic M.V. inspection	Camber (deg.)	-1°40' (-1°35') ±45'
		Toe-in - mm (in.)	in 7 (in 6) ±2

* Indicates pre-set, adjustable, trend set or other.

(): In unloaded vehicle condition

Electrical - Instruments and Equipment

Speedometer	Type (analog, digital, std., opt.)	Analog
	Trip odometer (std., opt., n.a.)	Std.
Head-up display	Standard, optional, not available	
	Type	Secondary, opto-electronic
	Speedometer	Digital
	Status / warning indicators	Turn signals, high beam, low fuel, check gauges
	Brightness control	Day / night mode, adjustable
EGR maintenance indicator		N.A.
Charge indicator	Type	Electric gauge
	Warning device (light, audible)	Light
Temperature indicator	Type	Electric gauge
	Warning device (light, audible)	N.A.
Oil pressure indicator	Type	N.A.
	Warning device (light, audible)	Light
Fuel indicator	Type	Electric gauge
	Warning device (light, audible)	Light
Windshield wiper	Type (standard)	3 speed electric motor
	Type (optional)	N.A.
	Blade length	LH=500mm, RH=475mm
	Swept area cm ² (in. ²)	6599cm ²
Windshield washer	Type (standard)	Electric motor
	Type (optional)	N.A.
	Fluid level indicator (light, audible)	N.A.
Rear window wiper, wiper/washer (std., opt., n.a.)		N.A.
Horn	Type	Electric, disc
	Number used	2
Other		

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (-)

Engine Code/Description

SW20L

SW21L

Electrical - Supply System

Battery	Manufacturer	NATIONAL	
	Model, std., (opt.)	55D23L (75D26L)	
	Voltage	12 (12)	
	Amps at 0°F cold crank	356 (490)	
	Minutes-reserve capacity	99 (123)	
	Amps./hrs.-20 hr. rate	60 (65)	
Alternator	Location	Center of front luggage room	
	Manufacturer		
	Rating (idle/max. rpm)	70A	
	Ratio (alt. crank/rev.)	2.36	2.55
	Output at idle (rpm, park)	-	
Regulator	Optional (type & rating)	Alternating current, 90A	
	Type	1C	

Electrical - Starting System

Motor	Manufacturer		
	Current drain _____ °C(°F)	-	
	Power rating kw (hp)	-	
Motor drive	Engagement type	Shift	
	Pinion engages from (front, rear)	Front	

Electrical - Ignition System

Type	Electronic (std., opt., n.a.)	Std.	
	Other (specify)	-	
Coil	Manufacturer	NIPPONDENSO	
	Model	-	
	Current	Engine stopped - A	0
		Engine idling - A	0.8
Spark plug	Manufacturer	NIPPONDENSO NGK	0.7
	Model	PK20R8, BKR6EP8	PK20R11, BKR6EP-11
	Thread (mm)	M14x19	
	Tightening torque N-m (lb.-ft.)	17.7	18.4
	Gap	0.8	1.1
	Number per cylinder	1	
Distributor	Manufacturer	NIPPONDENSO	
	Model	-	

Electrical - Suppression

Locations & type	Flame sprayed distributor rotor Resistive high tension cord Resistive spark plug
------------------	--

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*)

Model Code/Description

All models

Body

Structure

Monocoque construction

Bumper system
front - rear

Front = Urethane facia + steel reinforcement
Rear = Urethane facia + plastic reinforcement

Anti-corrosion treatment

Body - Miscellaneous Information

Type of finish (lacquer, enamel, other)	Acrylic or alkyd enamel	
Hood	Material & mass	
	Hinge location (front, rear)	
	Type (counterbalance, prop)	
	Release control (internal, external)	
Trunk lid	Material & mass	
	Type (counterbalance, other)	
	Internal release control (elec., mech., n.a.)	
Hatch-back lid	Material & mass	
	Type (counterbalance, other)	
	Internal release control (elec., mech., n.a.)	
Tailgate	Material & mass	
	Type (drop, lift, door)	
	Internal release control (elec., mech., n.a.)	
Vent window control (crank, friction, pivot, power)	Front	
	Rear	-
Window regulator type (cable, tape, flex drive, etc.)	Front	
	Rear	-
Seat cushion type (e.g., 60/40 bucket, bench, wire, foam, etc.)	Front	Panel frame + spring + foam pad
	Rear	-
	3rd seat	-
Seat back type (e.g., 60/40, bucket, bench, wire, foam, etc.)	Front	Pipe frame + spring + foam pad
	Rear	-
	3rd seat	-

Frame

Type and description (separate frame, unitized frame, partially-unitized frame)

Unitized frame

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (•) _____

Model Code/Description

All models

Restraint System

Seating Position			Left	Center	Right
Active	Type & description (lap & shoulder belt, lap belt, etc.)	First seat	Std.=3-point, lap & shoulder belt with ELR retractor		Std.=3-point lap & shoulder belt with ELR and ALR retractor
	Standard / optional	Second seat	-	-	-
		Third seat	-	-	-
Passive	Type & description (air bag, motorized - 2-point belt, fixed belt, knee bolster, manual - lap belt)	First seat		-	
	Standard / optional	Second seat	-	-	-
		Third seat	-	-	-

Glass	SAE Ref. No.	
Windshield glass exposed surface area cm ² (in. ²)	S1	8350
Side glass exposed surface area cm ² (in. ²) - total 2-sides	S2	6208
Backlight glass exposed surface area cm ² (in. ²)	S3	1734
Total glass exposed surface area cm ² (in. ²)	S4	16292
Windshield glass (type)		Laminated
Side glass (type)		Tempered
Backlight glass (type)		Tempered

Headlamps

Description (sealed beam, halogen, replaceable bulb, etc.)	
Shape	Rectangular
Lo-beam type (2A1, 2B1, 2C1, etc.)	
Quantity	
Hi-beam type (1A1, 2A1, 1C1, 2C1, etc.)	
Quantity	

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2
Model Year 1993 Issued Jan., 1992 Revised (*) _____

Engine Code/Description

Climate Control System

Air conditioning (std., opt., man., auto.)		Opt.
Condenser	Type	
	Eff. face area (sq. mm.)	
	Fins per inch	
Evaporator	Type	
	Eff. face area (sq. mm.)	
	Fins per inch	
Heater core	Material	
	Eff. face area (sq. mm.)	
	Fins per inch	
Compressor	Type	
	Displacement (cc.)	
	Manufacturer	
Accumulator	A/C pulley ratio	
	Type	
	Height (mm.)	
Receiver	Diameter (mm.)	
	Type	
	Height (mm.)	
Refrigerant control (CCOT, TVS, etc.)		
Heater water valve (yes / no)		
Refrigerant (R - 12, R - 134a, etc.)		
Charge level (lbs. - oz.)		
Cold engine lockout switch (yes / no)		
Wide open throttle cutout switch (yes / no)		

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2
Model Year 1993 Issued Jan., 1992 Revised (+) _____

Model Code/Description

All models

Convenience Equipment (standard, optional, n.a.)

Clock (digital, analog)	Std.
Compass / thermometer	
Console (floor, overhead)	
Defroster, elec. backlight	Std.
Electronic	Diagnostic monitor (integrated, individual)
	Instrument cluster (list instruments)
	Keyless entry
	Tripminder (avg. spd., fuel)
	Voice alert (list items)
	Other
Fuel door lock (remote, key, electric)	
Lamps	Auto head on / off delay, dimming
	Cornering
	Courtesy (map, reading)
	Door lock, ignition
	Engine compartment
	Fog
	Glove compartment
	Trunk
	Illuminated entry system (list lamps, activation)
	Other
Mirrors	Day / night (auto, man.)
	L.H. (remote, power, heated)
	R.H. (convex, remote, power, heated)
	Visor vanity (RH / LH, illuminated)
Navigation system (describe)	
Parking brake-auto release (warning light)	

MVMA Specifications

METRIC (U.S. Customary)

Model Code/Description

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (*)

All models

Convenience Equipment (standard, optional, n.a.)

Power equipment	Deck lid (release, pull down)			
	Door locks (manual, automatic, describe system)			
	Seats	2 - 4 - 6 way, etc.	N.A.	
		Reclining (R.H., L.H.)	N.A.	
		Memory (R.H., L.H., preset recline)	N.A.	
		Support (lumbar, hip, thigh, etc.)	N.A.	
		Heated (R.H., L.H., other)	N.A.	
	Side windows		Opt.	
Vent windows		None		
Rear windows		None		
Radio systems	Antenna (location, whip, w / shield, power)		Std.=2.2L, standard roof, front pillar: others, rear quarter, power Opt.=rear quarter, power + windshield AM/FM MPX ETR with cassette (1 din)	
	Standard	AM, FM, stereo, tape, compact disc, graphic equalizer, theft deterrent, radio prep package, headphone jacks, etc.	AM/FM MPX ETR with cassette and compact disc, acoustic flavor theft deterrent (2 din) AM/FM MPX ETR with cassette and acoustic flavor, theft deterrent (1 din)	
	Optional			
	Speaker (number, location)		4=doors + outside mirror brackets 6=4 + rear sides, 7=6 + behind left seat	
	Roof: open air or fixed (flip-up, sliding, "T")			
	Speed control device			
Speed warning device (light, buzzer, etc.)		N.A.		
Tachometer (rpm)				
Telephone system (describe)				
Theft deterrent system				

Trailer Towing

Towing capable	Yes / No	
Engine / transmission / axle	Std / Opt	
Tow class (I, II, III)*	Std / Opt	
Max. gross trailer wgt. (lbs.)	Std / Opt	
Max. trailer tongue load (lbs.)	Std / Opt	
Towing package available	Yes / No	

* Class I - 2,000 lbs. Class II - 3,500 lbs. Class III - 5,000 lbs.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Dimensions See Key Sheets for definitions

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (*)

All dimensions to ground are for comparative purposes only. Dimensions are to be shown for all base body models of each vehicle line. SAE Ref. no. refers to the definition published in SAE Recommended Practice J1100 "Motor Vehicle Dimensions," unless otherwise specified.

Model Code/Description

SAE
Ref.
No.

All models

Width

Tread (front)	W101	1470
Tread (rear)	W102	1450
Vehicle width	W103	1700
Body width at Sq RP (front)	W117	1695
Vehicle width (front doors open)	W120	3685
Vehicle width (rear doors open)	W121	-
Turn-in angle (degrees)	W122	30.0°
Outside mirror width	W410	

Length

Wheelbase	L101	2400
Vehicle length	L103	4170
Overhang (front)	L104	865
Overhang (rear)	L105	905
Upper structure length	L123	1657
Rear wheel C/L "X" coordinate	L127	2400

Height*

Passenger distribution (front/rear)	PD1.2.3	2
Trunk/cargo load		0/0
Vehicle height	H101	1235
Cowl point to ground	H114	800
Deck point to ground	H138	920
Rocker panel-front to ground	H112	150
Rocker panel-rear to ground	H111	165
Windshield slope angle (degrees)	H122	60.0°
Backlight slope angle (degrees)	H121	15.0°

Ground Clearance*

Front bumper to ground	H102	400/230
Rear bumper to ground	H104	350
Bumper to ground front at curb mass (wt.)	H103	390/220
Bumper to ground rear at curb mass (wt.)	H105	340
Angle of approach (degrees)	H106	13°
Angle of departure (degrees)	H107	17°
Ramp breakover angle (degrees)	H147	13°
Axle differential to ground (front/rear)	H153	160 (Rear)
Min. running ground clearance	H156	130
Location of min. run. grd. clear.		Exhaust pipe heat insulator

* All vehicle height and ground clearances are measured at the Manufacturer's Design Load Weight. Manufacturers Design Load Weight is defined with indicated passenger distribution and trunk/cargo load, unless otherwise specified. All linear dimensions are in millimeters (inches) unless otherwise noted.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Dimensions See Key Sheets for definitions

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (+)

Model Code/Description

All models

Front Compartment	SAE Ref. No.	
SgRP front, "X" coordinate	L31	1353
Effective head room	H61	Standard roof=953.4, Standard roof w/op. Sun roof=935.1, T-bar Roof=934.4
Max. eff. leg room (accelerator)	L34	1102.1
SgRP to heel point	H30	195
SgRP to heel point	L53	921.1
Back angle (degrees)	L40	21°
Hip angle (degrees)	L42	94.5°
Knee angle (degrees)	L44	136°
Foot angle (degrees)	L46	87°
Design H-point front travel	L17	Driver=208.4, Passenger=164.8
Normal driving & riding seat track trvl.	L23	Driver=208.4, Passenger=164.8
Shoulder room	W3	1371
Hip room	W5	1326
Upper body opening to ground	H50	327
Steering wheel maximum diameter*	W9	380
Steering wheel angle (degrees)	H18	Manual steering=21°, Power steering=22°
Accel. heel pt. to steer. whl. cntr	L11	
Accel. heel pt. to steer. whl. cntr	H17	
Undepressed floor covering thickness	H67	12

Rear Compartment

None

SgRP point couple distance	L50	
Effective head room	H63	
Min. effective leg room	L51	
SgRP (second to heel)	H31	
Knee clearance	L48	
Shoulder room	W4	
Hip room	W6	
Upper body opening to ground	H51	
Back angle (degrees)	L41	
Hip angle (degrees)	L43	
Knee angle (degrees)	L45	
Foot angle (degrees)	L47	
Depressed floor covering thickness	H73	

Luggage Compartment

Usable luggage capacity L (cu. ft.)	V1	189 (Fr.=34, Rr.=155)
Liftover height	H195	755

Interior Volumes (EPA Classification)

Vehicle class	
Interior volume index including trunk/cargo (cu. ft.)**	
Trunk/cargo index (cu. ft.)	

* See page 14.

** See definition page 33.

All linear dimensions are in millimeters (inches) unless otherwise noted.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Dimensions See Key Sheets for definitions

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (-)

Model Code/Description

Station Wagon / MPV* - Third Seat

SAE
Ref.
No.

Seat facing direction	SD1
SgRP couple distance	L85
Shoulder room	W85
Hip room	W86
Effective leg room	L86
Effective head room	H86
SgRP to heel point	H87
Knee clearance	L87
Back angle (degrees)	L88
Hip angle (degrees)	L89
Knee angle (degrees)	L90
Foot angle (degrees)	L91

Station Wagon / MPV* - Cargo Space

Cargo length (open front)	L200
Cargo length (open second)	L201
Cargo length (closed front)	L202
Cargo length (closed second)	L203
Cargo length at belt (front)	L204
Cargo length at belt (second)	L205
Cargo width (wheelhouse)	W201
Rear opening width at floor	W203
Opening width at belt	W204
Min. rear opening width above belt	W205
Cargo height	H201
Rear opening height	H202
Tailgate to ground height	H250
Front seat back to load floor height	H197
Cargo volume index m ³ (ft. ³)	V2
Hidden cargo volume index m ³ (ft. ³)	V4
Cargo volume index-rear of 2-seat	V10
○ Cargo volume index*	V8
○ Cargo width at floor*	W500
○ Maximum cargo height*	H503

Hatchback - Cargo Space

Cargo length at front seatback height	L208
Cargo length at floor (front)	L209
Cargo length at second seatback height	L210
Cargo length at floor (second)	L211
Front seatback to load floor height	H197
Second seatback to load floor height	H198
Cargo volume index m ³ (ft. ³)	V3
Hidden cargo volume index m ³ (ft. ³)	V4
Cargo volume index-rear of 2-seat	V11

All linear dimensions are in millimeters (inches) unless otherwise noted.

*MPV - Multipurpose Vehicle

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan. 1992 Revised (+) _____

Model Code/
Description

All models

Vehicle Fiducial Marks

Fiducial Mark
Number

Define Coordinate Location

Front(1)


Center of installed hole for outer seat track
in front floor cross-member

Front(2)

Rear(1)

Rear(2)

Center of paint drain hole
in front floor

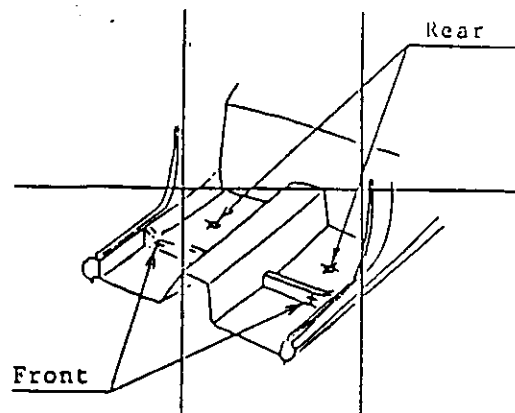

Notes: Provide
3 of 4
Fiducial Mark
Locations

Front	W21**	W5 + 86.4
	L54**	L19 + 78.4
	H81**	H10 + 43.2
	H161**	230
	H163**	220
Rear	W22**	W4 + 55.0
	L55**	L23 + 50.0
	H82**	H9 + 89.2
	H162**	175
	H164**	165

* Reference - SAE Recommended Practice J18, Motor Vehicle Fiducial Marks.

** Reference - SAE Recommended Practice J10 - Motor Vehicle Dimensions.

All linear dimensions are in millimeters (inches) unless otherwise noted.

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993

Issued Jan., 1992 Revised (*)

[illegible]

* Reference - SAE J1100 Motor vehicle dimensions, curb weight definition.

** ETWC - Equivalent Test Weight Class -- basis for U.S. Environmental Protection Agency emission certifications.
Refer to ETWC code legend below for test weight class.

ETWC LEGEND

1000	I	2000	Q	3000	Y	4000
1125	J	2125	R	3125		4250
1250	K	2250	S	3250	AA	4500
1375	L	2375	T	3375	BB	4750
1500	M	2500	U	3500	CC	5000
1625	N	2625	V	3625	DD	5250
1750	O	2750	W	3750	EE	5500
1875	P	2875	X	3875	FF	5750

***Shipping Mass (weight) = Curb Weight Less:

34.9 kg

MVMA Specifications

METRIC (U.S. Customary)

Vehicle Line TOYOTA MR2

Model Year 1993 Issued Jan., 1992 Revised (•) _____

[illegible]


* Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications


METRIC (U.S. Customary)

Exterior Vehicle And Body Dimensions - Key Sheet


Exterior Width

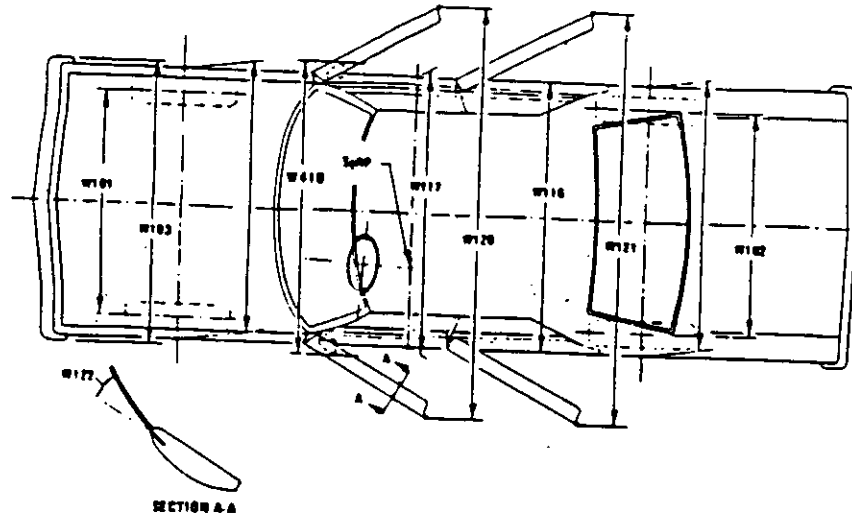

Exterior Length & Height

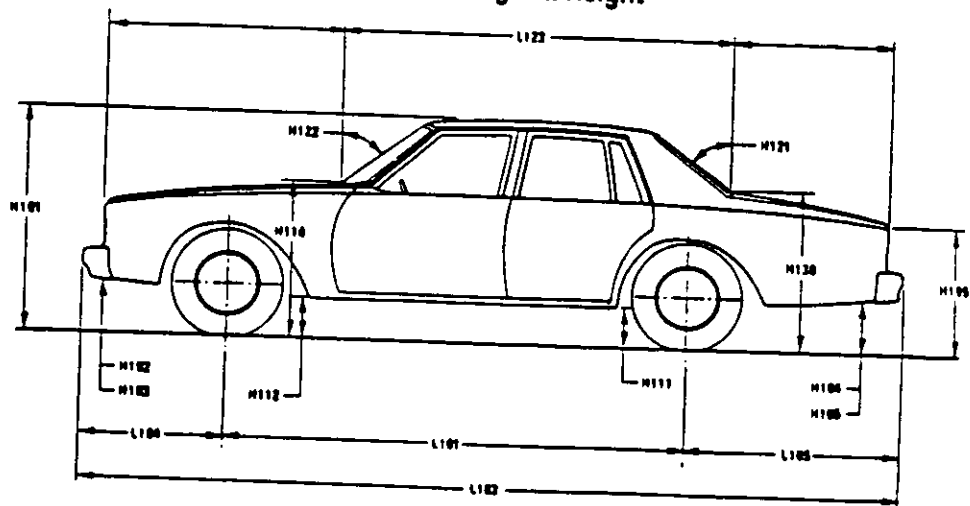







Exterior Ground Clearance

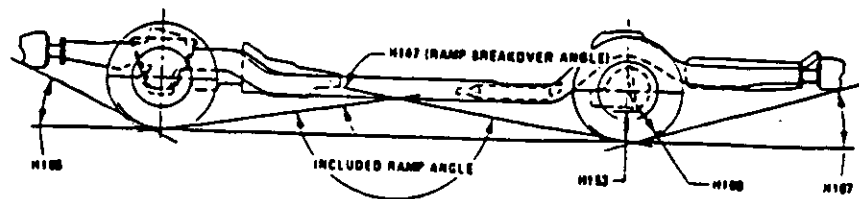

MVMA Specifications Form

METRIC (U.S. Customary)

Interior Vehicle And Body Dimensions – Key Sheet

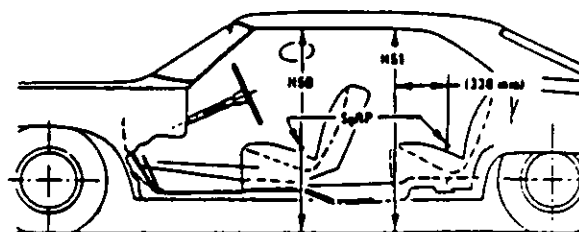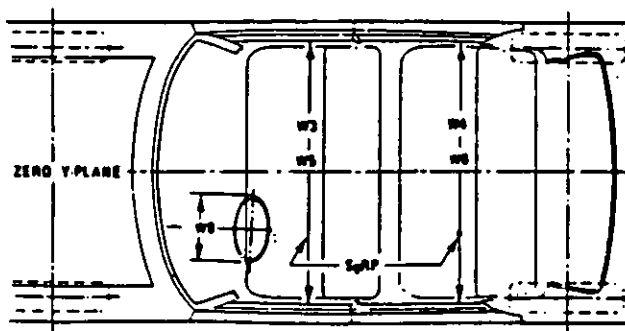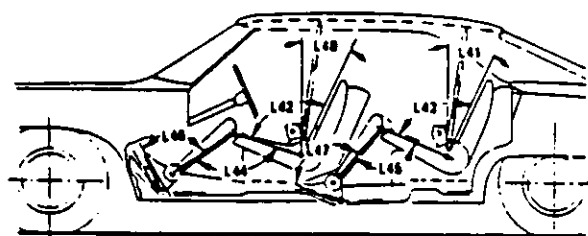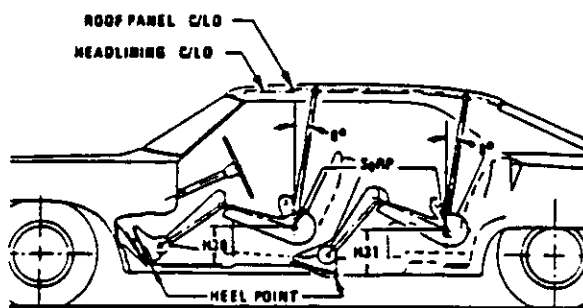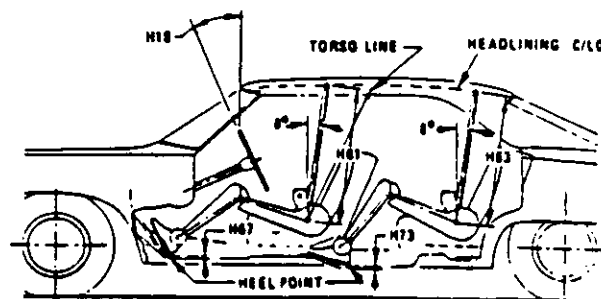
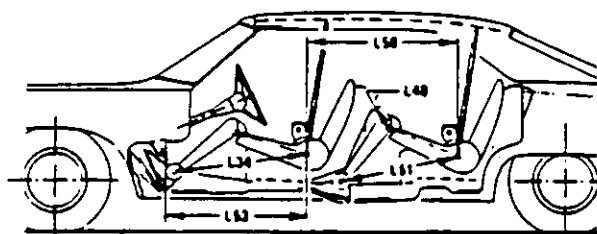


MVMA Specifications



METRIC (U.S. Customary)

Interior Vehicle And Body Dimensions – Key Sheet


Third Seat

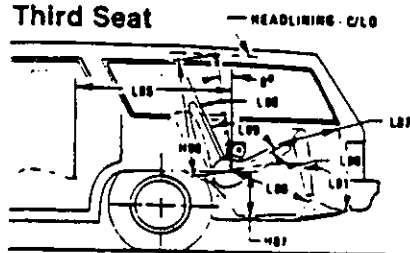



Cargo Space

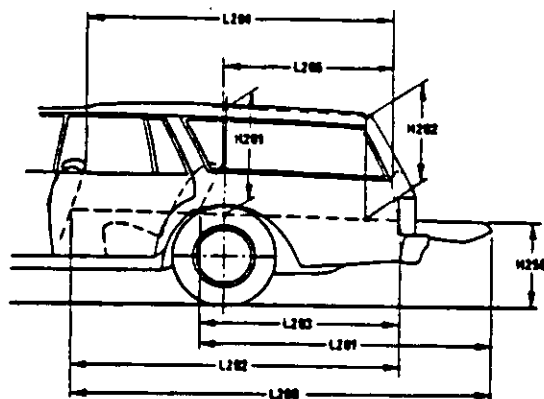

Station Wagon

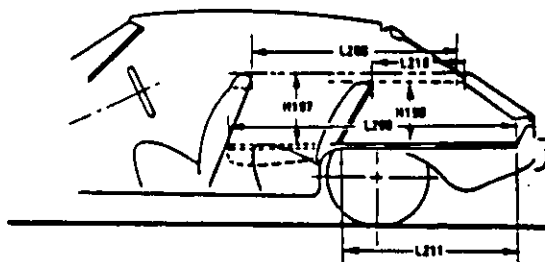

Hatchback

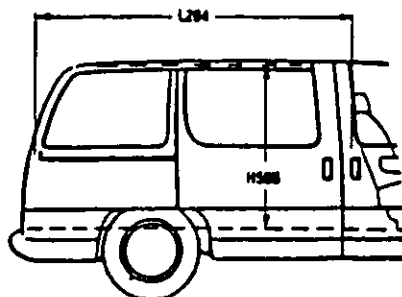

Ø Multipurpose Vehicle

MVMA Specifications

METRIC (U.S. Customary)

Exterior Vehicle And Body Dimensions - Key Sheet Dimensions Definitions

Seating Reference Point

SEATING REFERENCE POINT means the manufacturer's design reference point which -

- (a) Establishes the rearmost normal design driving or riding position of each designated seating position in a vehicle;
- (b) Has coordinates established relative to the design vehicle structure;
- (c) Simulates the position of the pivot center of the human torso and thigh; and
- (d) Is the reference point employed to position the two dimensional templates described in SAE Recommended Practice J826, "Devices for Use in Defining and Measuring Vehicle Seating Accommodations."

Width Dimensions

- W101 TREAD - FRONT. The dimension measured between the tire centerlines at the ground.
- W102 TREAD - REAR. The dimension measured between the tire centerlines at the ground. In case of dual wheels, the dimension will be measured to the centerline of tire and wheel assemblies.
- W103 VEHICLE WIDTH. The maximum dimension measured between the widest point on the vehicle, excluding exterior mirrors, flexible mud flaps, marker lamps, but including bumpers, moldings, sheet metal protrusions or dual wheels, if standard equipment.
- W117 BODY WIDTH AT SgRP - FRONT. The dimension measured laterally between the widest points on the body at the SgRP-front, excluding door handles, applied moldings, or appliques.
- W120 VEHICLE WIDTH - FRONT DOORS OPEN. The dimension measured between the widest point on the front doors in maximum hold-open position.
- W121 VEHICLE WIDTH - REAR DOORS OPEN. The dimension measured between the widest point on the rear doors in maximum hold-open position. For vehicles with a rear door on only one side, this dimension is to the zero "Y" plane.
- W122 TUMBLE - HOME. STRAIGHT SIDE GLASS. The angle measured from a vertical to the outside surface of the front door glass at the zero "X" plane.
- W123 CURVED SIDE GLASS. The angle measured from a vertical to a chord extending from the upper DLO to the lower DLO at the outside surface of the front door glass at the front SgRP "X" plane.
- W410 OUTSIDE MIRROR WIDTH. The dimension between the widest point on the outside mirrors. The standard right and left mirror adjusted for normal driving will be shown unless otherwise noted. When only one outside mirror is standard, the dimension will be to the zero "Y" plane.

Length Dimensions

- L101 WHEELBASE (WB). The dimension measured longitudinally between front and rear wheel centerlines. In case of dual rear axles, the dimension shall be to the midpoint of the centerlines of the rear wheels.
- L103 VEHICLE LENGTH. The maximum dimension measured longitudinally between the foremost point and the rearmost point on the vehicle, including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L104 OVERHAND - FRONT. The dimension measured longitudinally from the centerline of the front wheels to the foremost point on the vehicle including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L105 OVERHAND - REAR. The dimension measured longitudinally from the centerline of the rear wheels; or in the case of dual rear axles, the dimension shall be the midpoint of the centerlines of the rear wheels, to the rearmost point on the vehicle including rear bumpers, bumper guards, tow hooks and rub strips, if standard equipment.

- L123 UPPER STRUCTURE LENGTH. The dimension measured longitudinally from the cowl point to the deck point.
- L127 REAR WHEEL CENTERLINE "X" COORDINATE or in the case of dual rear axles, the coordinate shall be the midpoint of the distance between the rear axle centerlines.

Height Dimensions

- H101 VEHICLE HEIGHT. The dimension measured vertically from the highest point on the vehicle body to ground.
- H111 ROCKER PANEL - REAR TO GROUND. The dimension measured vertically from the bottom of the rocker or side quarter panel at the front of the rear wheel opening, excluding flanges, to ground.
- H112 ROCKER PANEL - FRONT TO GROUND. The dimension measured vertically from the foremost point on the bottom of the rocker panels, excluding flanges, to ground.
- H114 COWL POINT TO GROUND. Measured at zero "Y" plane.
- H121 BACKLIGHT SLOPE ANGLE. The angle between the vertical reference line and the surface of backlight at vehicle zero "Y" plane. For curve backlight, the angle is to chord of backlight arc from lower DLO to upper DLO.
- H122 WINDSHIELD SLOPE ANGLE. The angle between the vertical reference line and a chord of the windshield arc running from the lower DLO to the upper DLO at the vehicle zero "Y" plane. In the case of wrap over glass, the angle to be measured will be formed by a chord 457 mm (18.0 in.) long drawn from the lower DLO to the intersecting point on the windshield.
- H138 DECK POINT TO GROUND. Measured at zero "Y" plane.
- H109 STATIC LOAD - TIRE RADIUS - REAR. Specified by the manufacturer in accordance with composite TIRE SECTION STANDARD.

Ground Clearance Dimensions

- H102 FRONT BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the front bumper to ground, including bumper guards, if standard equipment.
- H103 FRONT BUMPER TO GROUND - CURB MASS (WT.). Measured in same manner as H102.
- H104 REAR BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the rear bumper to ground, including bumper guards, if standard equipment.
- H105 REAR BUMPER TO GROUND - CURB MASS (WT.). Measured in the same manner as H104.
- H106 ANGLE OF APPROACH. The angle measured between a line tangent to the front tire static loaded radius arc and the initial point of structural interference forward of the front tire to ground. The limiting structural component shall be designated.
- H107 ANGLE OF DEPARTURE. The angle measured between a line tangent to the rear tire static loaded radius arc and the initial point structural interference rearward of the rear tire to ground. The limiting component shall be designated.
- H147 RAMP BREAKOVER ANGLE. The angle measured between two lines tangent to the front and rear tire static loaded radius and intersecting at a point on the underside of the vehicle which defines the largest ramp over which the vehicle can roll.
- H153 REAR AXLE DIFFERENTIAL TO GROUND. The minimum dimension measured from the rear axle differential to ground.
- H156 MINIMUM RUNNING GROUND CLEARANCE. The minimum dimension measured from the sprung vehicle to ground. Specify location.

MVMA Specifications

METRIC (U.S. Customary)

Interior Vehicle And Body Dimensions - Key Sheet Dimensions Definitions

Luggage Compartment Dimensions

- V1 USABLE LUGGAGE CAPACITY - Total of volumes of individual pieces of standard luggage set plus H-boxes stowed in the luggage compartment in accordance with the procedure described in paragraph 8.2 of SAE-J1100a.

Interior Volumes (EPA Classification)

The Interior Volume Index is listed for each body style except two seaters. The Interior Volume Index estimates the space in a car. It is based on four measurements - head room, shoulder room, hip room, and leg room - for the front and rear seats, plus trunk capacity.

The Trunk/Cargo Index is an estimate of the size of the trunk/cargo space. In station wagons and hatchbacks it is an estimate of the space behind the second seat.

Station Wagon / MPV - Third Seat Dimensions

- L85 SgRP COUPLE DISTANCE - THIRD. The dimension measured horizontally from the SgRP - second to the SgRP - third.
- L86 EFFECTIVE LEG ROOM - THIRD. The dimension measured along a line from the ankle pivot center to the SgRP - third plus 254 mm (10.0 in.).
- L87 KNEE CLEARANCE - THIRD. The minimum dimension from the knee pivot center to the back of second seatback minus a constant of 51 mm (2.0 in.). With rear-facing third seat, dimension is measured to closure.
- L88 BACK ANGLE - THIRD. Measured in the same manner as L41.
- L89 HIP ANGLE - THIRD. Measured in the same manner as L43.
- L90 KNEE ANGLE - THIRD. Measured in the same manner as L45.
- L91 FOOT ANGLE - THIRD. Measured in the same manner as L47.
- W85 SHOULDER ROOM - THIRD. Measured in the same manner as W4.
- W86 HIP ROOM - THIRD. Measured in the same manner as W5.
- H86 EFFECTIVE HEAD ROOM - THIRD. The dimension, measured along a line 8 deg. from the SgRP - third to the headlining rear of vertical plus a constant of 102 mm (4.0 in.).
- H87 SgRP - THIRD TO HEEL POINT.
- SD1 SEAT FACING DIRECTION - THIRD.

Station Wagon / MPV - Cargo Space Dimensions

- L200 CARGO LENGTH - OPEN - FRONT. The minimum dimension measured longitudinally from the back of the front seatback at the height of the undeepressed floor covering to the rearmost point on the undeepressed floor covering on the open tailgate or cargo surface if the rear closure is a conventional door type tailgate at the zero "Y" plane.
- L201 CARGO LENGTH - OPEN - SECOND. The dimension measured longitudinally from the back of the second seatback at the height of the undeepressed floor covering to the rearmost point on the undeepressed floor covering on the open tailgate or cargo floor surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.

- L202 CARGO LENGTH - CLOSED - FRONT. The minimum dimension measured horizontally from the back of the front seat at the height of the undeepressed floor covering to the rearmost point on the undeepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L203 CARGO LENGTH - CLOSED - SECOND. The dimension measured horizontally from the back of the second seat at the height of the undeepressed floor covering to the rearmost point on the undeepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L204 CARGO LENGTH AT BELT - FRONT. The minimum dimension measured horizontally from the back of the front seatback at the seatback top to the foremost normal surface of the closed tailgate or inside surface of the cab backpanel at the height of the belt, on the zero "Y" plane.
- L205 CARGO LENGTH AT BELT - SECOND. The minimum dimension measured horizontally from the back of the second seatback at the seatback top to the foremost normal surface of the closed tailgate at the height of the belt, on the zero "Y" plane.
- W201 CARGO WIDTH - WHEELHOUSE. The minimum dimension measured laterally between the trimmed wheelhousings at floor level. For any vehicle not trimmed, measure to the sheet metal.
- W203 REAR OPENING WIDTH AT FLOOR. The minimum dimension measured laterally between the limiting interferences of the rear opening at floor level.
- W204 REAR OPENING WIDTH AT BELT. The minimum dimension measured laterally between the limiting interferences of the rear opening at belt height or top of pick up box.
- W205 REAR OPENING WIDTH ABOVE BELT. The minimum dimension measured laterally between the limiting interferences of the rear opening above the belt height.
- Ø W500 CARGO WIDTH AT FLOOR. The maximum dimension measured laterally between the limiting interferences at the floor level. This dimension shall include nbs and pillars, but will exclude wheelhouses.
- H197 FRONT SEATBACK TO LOAD FLOOR HEIGHT. The dimension measured vertically from the horizontal tangent to the top of the seatback to the undeepressed floor covering.
- H201 CARGO HEIGHT. The dimension measured vertically from the top of the undeepressed floor covering to the headlining at the rear wheel "X" coordinate on the zero "Y" plane.
- H202 REAR OPENING HEIGHT. The dimension measured vertically from the top of the undeepressed floor covering to the upper trimmed opening on the zero "Y" plane with rear door fully open.
- H250 TAILGATE TO GROUND CURB MASS (WT.). The dimension measured vertically from the top of the undeepressed floor covering on the lowered tailgate to ground on the zero "Y" plane.
- Ø H505 MAXIMUM CARGO HEIGHT. The maximum vertical dimension rear of the front seat from the cargo floor to roof bow or headlining at the zero "Y" plane.

MVMA Specifications

METRIC (U.S. Customary)

Interior Vehicle And Body Dimensions - Key Sheet Dimensions Definitions

Glass Areas

- S1 Windshield area.
- S2 Side windows area. Includes the front door, rear door, vents, and rear quarter windows on both sides of the vehicle.
- S3 Backlight areas.
- S4 Total area. Total of all areas (S1 + S2 + S3).

Fiducial Mark Dimensions

- Fiducial Mark - Number 1
 - L54 "X" coordinate.
 - W21 "Y" coordinate.
 - H81 "Z" coordinate.
 - H161 Height "Z" coordinate to ground at curb weight.
 - H163 Height "Z" coordinate to ground.
- Fiducial Mark - Number 2
 - L55 "X" coordinate.
 - W22 "Y" coordinate.
 - W82 "Z" coordinate.
 - H162 Height "Z" coordinate to ground at curb weight.
 - H164 Height "Z" coordinate to ground.

Front Compartment Dimensions

- L11 ACCELERATOR HEEL POINT TO STEERING WHEEL CENTER. The dimension measured horizontally from the AHP to the intersection of the steering column centerline and a plane tangent to the upper surface of the steering wheel rim.
- L17 DESIGN H-POINT - FRONT TRAVEL. The dimension measured horizontally between the design H-point - front in the foremost and rearmost seat track positions. (See SAE J1100)
- L23 NORMAL DRIVING AND RIDING SEAT TRACK TRAVEL. The dimension measured horizontally between a point on the design H-point travel line from the SgRP to the displaced point on the design H-point travel line with the seat moved to the foremost seat position, but not to include seat track travel used for purposes other than normal driving and riding positions. (See SAE J1100).
- L31 SgRP - FRONT, "X" COORDINATED.
- L34 MAXIMUM EFFECTIVE LEG ROOM - ACCELERATOR. The dimension measured along a line from the ankle pivot center to the SgRP - front plus 254 mm (10.0 in.) measured with right foot on the undepressed accelerator pedal. For vehicles with SgRP to heel (H30) greater than 18 in., the accelerator pedal may be depressed as specified by the manufacturer. If the accelerator is depressed, the manufacturer shall place foot flat on pedal and note the depression of the pedal.
- L40 BACK ANGLE - FRONT. The angle measured between a vertical line through the SgRP - front and the torso line. If the seatback is adjustable, use the normal driving and riding position specified by the manufacturer.
- L42 HIP ANGLE - FRONT. The angle measured between torso line and thigh centerline.
- L44 KNEE ANGLE - FRONT. The angle measured between thigh centerline and lower leg centerline measured on the right leg.
- L46 FOOT ANGLE - FRONT. The angle measured between the lower leg centerline and a line tangent to the ball and heel of the bare foot flesh line measured on the right leg. Ref SAE J826.
- L53 SgRP - FRONT TO HEEL. The dimension measured horizontally from the SgRP - front to the accelerator heel point.
- W3 SHOULDER ROOM - FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP - front at height between the belt line and 254 mm (10.0 in.) above the SgRP - front, excluding the door assist strap and attaching parts.

- W5 HIP ROOM - FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP - front within 25 mm (1.0 in.) below and 76 mm (3.0 in.) above the SgRP - front and 76 mm (3.0 in.) fore and aft of the SgRP - front.
- W9 STEERING WHEEL MAXIMUM OUTSIDE DIAMETER. Define if other than round.
- H7 ACCELERATOR HEEL POINT TO THE STEERING WHEEL CENTER. The dimension measured vertically from the AHP - front to the intersection of the steering column centerline to a plane tangent to the upper surface of the steering wheel rim.
- H18 STEERING WHEEL ANGLE. The angle measured from a vertical to the surface plane of the steering wheel.
- H30 SgRP - FRONT TO HEEL. The dimension measured vertically from the SgRP - front to the accelerator heel point.
- H50 UPPER BODY OPENING TO GROUND - FRONT. The dimension measured vertically from the trimmed body opening to the ground on the SgRP - front "X" plane.
- H61 EFFECTIVE HEAD ROOM - FRONT. The dimension measured along a line 8 deg. rear of vertical from the SgRP - front to the headlining plus 102 mm (4.0 in.).
- H67 FLOOR COVERING THICKNESS - UNDEPRESSED - FRONT. The dimension measured vertically from the surface of the undepressed floor covering to the underbody sheet metal at the accelerator heel point.

Rear Compartment Dimensions

- L41 BACK ANGLE - SECOND. The angle measured between a vertical line through the SgRP - second and the torso line.
- L43 HIP ANGLE - SECOND. The angle measured between torso line and thigh centerline.
- L45 KNEE ANGLE - SECOND. The angle measured between thigh centerline and lower leg centerline.
- L47 FOOT ANGLE - SECOND. The angle measured between the lower leg centerline and a line tangent to the ball and heel of the three-dimensional devices bare foot flesh line (Reference J826).
- L48 KNEE CLEARANCE - SECOND. The minimum dimension measured from the knee pivot center to the back of the front seatback minus 51 mm (2.0 in.).
- L50 SgRP COUPLE DISTANCE - SECOND. The dimension measured horizontally from the driver SgRP - front to the SgRP - second.
- L51 MINIMUM EFFECTIVE LEG ROOM - SECOND. The dimension measured along a line from the ankle pivot center to the SgRP - second plus 254 mm (10.0 in.).
- W4 SHOULDER ROOM - SECOND. The minimum dimension measured laterally between door or quarter trimmed surfaces on the "X" plane through the SgRP - second at height between 254-406 mm (10.0-16.0 in.) above the SgRP - second, excluding the door assist straps and attaching parts.
- W6 HIP ROOM - SECOND. Measured in the same manner as W5.
- H31 SgRP - SECOND TO HEEL. The dimension measured vertically from the SgRP - second to the two dimensional device heel point on the depressed floor covering.
- H51 UPPER BODY OPENING TO GROUND - SECOND. The dimension measured vertically from the trimmed body opening to the ground on the "X" plane 330 mm (13.0 in.) forward of the SgRP - second.
- H63 EFFECTIVE HEAD ROOM - SECOND. The dimension measured along a line 8 deg. rear of vertical from the SgRP to the headlining, plus 102 mm (4.0 in.).
- H73 FLOOR COVERING - DEPRESSED - SECOND. The dimension measured vertically from the heel point to the underbody sheet metal.

MVMA Specifications

METRIC (U.S. Customary)

Interior Vehicle And Body Dimensions – Key Sheet Dimensions Definitions

V2 STATION WAGON

Measured in inches:

$$\frac{W4 \times H201 \times L204}{1728} = \text{ft}^3$$

Measured in mm:

$$\frac{W4 \times H201 \times L204}{10^9} = \text{m}^3 \text{ (cubic meter)}$$

V4 HIDDEN LUGGAGE CAPACITY – REAR OF FRONT SEAT.

The total volumes of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the front seat.

V5 TRUCKS AND MPV'S WITH OPEN AREA.

Measured in inches:

$$\frac{L506 \times W505 \times H503}{1728} = \text{ft}^3$$

Measured in mm:

$$\frac{L506 \times W500 \times H503}{10^9} = \text{m}^3 \text{ (cubic meter)}$$

V8 TRUCKS AND MPV'S WITH CLOSED AREA.

Measured in inches:

$$\frac{L204 \times W500 \times H505}{1728} = \text{ft}^3$$

Measured in mm:

$$\frac{L204 \times W500 \times H505}{10^9} = \text{m}^3 \text{ (cubic meter)}$$

V8 HIDDEN LUGGAGE CAPACITY – REAR OF SECOND SEAT.

The total volume of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the second seat.

V10 STATION WAGON CARGO VOLUME INDEX.

Measured in inches:

$$\frac{H201 \times L205 \times \frac{W4 + W201}{2}}{1728} = \text{ft}^3$$

Measured in mm:

$$\frac{H201 \times L205 \times \frac{W4 + W201}{2}}{10^9} = \text{m}^3 \text{ (cubic meter)}$$

Hatchback – Cargo Space Dimensions

All hatchback cargo dimensions are to be taken with the front seat in full down and rear position, and the rear seat folded down. The hatchback door is in the closed position. (For electronically adjusted seats, see the manufacturer's specifications for Design "H" Point).

L208 CARGO LENGTH AT FRONT SEATBACK HEIGHT.

The minimum horizontal dimension from the "X" plane tangent to the rearmost surface of the driver's seatback to the inside limiting interference of the hatchback door on the vehicle zero "Y" plane.

L209 CARGO LENGTH AT FLOOR – FRONT.

The minimum horizontal dimension measured at floor level from the rear of the front seatback to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.

L210 CARGO LENGTH AT SECOND SEATBACK HEIGHT.

The minimum dimension measured from the "X" plane tangent to the rearmost surface of second seatback or the load floor which is stowed at least one half of the H198 dimension height above the rear load floor, to the rearmost inside limiting interference on the zero "X" plane.

L211 CARGO LENGTH AT FLOOR – SECOND SEATBACK.

The minimum horizontal dimension measured at floor level from the rear of the second seatback or load floor panel to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.

H197 FRONT SEATBACK TO LOAD HEIGHT.

The dimension measured vertically from the horizontal tangent to the top of the seatback to the undepressed floor covering.

H198 SECOND SEATBACK TO LOAD FLOOR HEIGHT.

The dimension measured vertically from the second seatback to the undepressed floor covering.

V3 HATCHBACK.

Measured in inches:

$$\frac{L208 + L209}{2} \times W4 \times H197 = \text{ft}^3$$

Measured in mm:

$$\frac{L208 + L209}{2} \times W4 \times H197 = \text{m}^3 \text{ (cubic meter)}$$

V4 HIDDEN LUGGAGE CAPACITY – REAR OF FRONT SEAT.

The total volumes of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the front seat.

V11 HATCHBACK CARGO VOLUME INDEX.

Usable luggage (one (1) stand and luggage set) below floor:

Measured in inches:

$$\frac{L210 + L211}{2} \times W4 \times H198 = \text{ft}^3$$

Measured in mm:

$$\frac{L210 + L211}{2} \times W4 \times H198 = \text{m}^3 \text{ (cubic meter)}$$

MVMA Specifications

METRIC (U.S. Customary)

Index

Subject	Page No.
Alternator	16
Axle Drive, Front, Rear, All Four	2, 9, 10
Axle Shafts	10
Battery	16
Body and Miscellaneous Information	17
Brakes - Parking Service	12, 13
Camber	15
Camshaft	3
Capacitors	3
Cooling System	5
Fuel Tank	6
Lubricants	6
Engine Crankcase	4
Transmission / Transaxle	8, 9
Rear Axle	10
Carburetor	2, 6
Caster	15
Climate Control System	19
Clutch - Pedal Operated	8
Coil, Ignition	16
Connecting Rods	4
Convenience Equipment	20-21
Cooling System	5
Crankshaft	4
Cylinders and Cylinder Head	3
Diesel Information	4
Dimension Definitions	28, 31, 32
Key Sheet - Exterior	29, 30, 32, 33, 34
Key Sheet - Interior	15, 18
Electrical System	7
Emission Controls	3
Engine - General	2
Bore, Stroke, Type	2, 3
Compression Ratio	3
Displacement	2
Firing Order, Cylinder Numbering	3
General Information, Power & Torque	2
Intake System	4
Power Teams	2
Exhaust System	7
Equipment Availability, Convenience	20
Fan, Cooling	5
Filters - Engine Oil, Fuel System	4
Four Wheel Drive	10
Frame	17
Front Suspension	11
Front Wheel Drive Unit	10
Fuel Economy, EPA	1
Fuel Injection	6
Fuel System	6
Fuel Tank	6
Glass	18
Headlamps	18
Headroom - Body	23, 24
Heights	22
Horns	15
Horsepower - Brake	2
Ignition System	18
Inflation - Tires	13
Interior Volumes	23
Instruments	15
Lagroom	23, 24
Lengths	22
Leveling, Suspension	11
Lifters, Valve	4
Linings - Clutch, Brake	8, 12
Lubrication - Engine Transmission / Transaxle	4, 8, 9
Luggage Compartment	23
Models	1
Motor Starting	16
Muffler	7
Origin	1

Subject	Page No.
Passenger Capacity	1
Passenger Mass Distribution	26
Pistons	3
Power Brakes	12
Power, Engine	2
Power Steering	14
Power Teams	2
Propeller Shaft	10
Pumps - Fuel	6
Water	5
Radiator - Cap, Hoses, Core	5
Ratios - Axle, Transaxle	2, 9, 10
Compression	2
Steering	14
Transmission / Transaxle	2, 8, 9
Rear Axle	2, 10
Regulator - Alternator	16
Restraint System	18
Rims	13
Rods - Connecting	4
Scrub Radius	14
Seats	17
Shock Absorbers, Front & Rear	11
Spark Plugs	16
Speedometer	15
Springs - Front & Rear Suspension	11
Stabilizer (Sway Bar) - Front & Rear	11
Starting System	16
Steering	14
Suppression - Ignition, Radio	18
Suspension - Front & Rear	11
Tail Pipe	7
Theft Protection	21
Thermostat, Cooling	5
Tires	13
Toe-In	15
Torque Converter	9
Torque - Engine	2, 8, 9
Trailer Towing	21
Transaxle	9
Transmission - Types	2, 8, 9
Transmission - Automatic	2, 9
Transmission - Manual	2, 8
Transmission - Ratios	2, 8, 9
Tread	22
Trunk Cargo Load	1
Trunk Luggage Capacity	23
Turning Diameter	14
Unibed Construction	18
Universal Joints, Propeller Shaft	10
Valve System	4
Vehicle Dimensions	22
Width	22
Length	22
Height	22
Ground Clearance	22
Front Compartment	23
Rear Compartment	23
Luggage Compartment	23
Station Wagon - Third Seat	24
Station Wagon - Cargo Space	24
Hatchback - Cargo Space	24
Fiducial Marks	25
Voltage Regulator	18
Water Pump	5
Weights	26, 27
Wheel Alignment	15
Wheelbase	22
Wheels & Tires	13
Wheel Spindle	14
Widths	22
Windshield	18
Windshield Wiper and Washer	15